

UC-NRLF




C 2 684 328


# GARAGES

## Country and Suburban

THE AMERICAN ARCHITECT  
NEW YORK

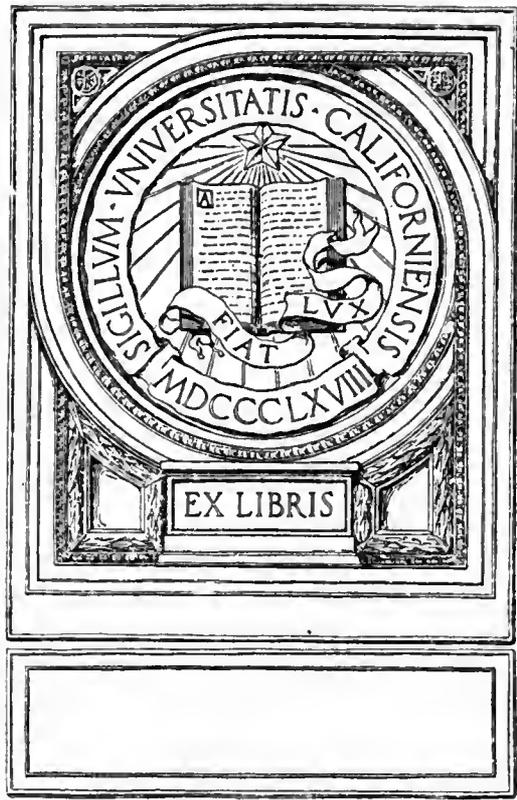









Digitized by the Internet Archive  
in 2008 with funding from  
Microsoft Corporation

<http://www.archive.org/details/garagescountrysu00newyrich>



# Garages

## Country and Suburban

*A Series of Authoritative Articles*

ON THE

### Structural Features of the Private Garage and Its Equipment

The Care of the Car, the Safe Handling of Gasolene and  
Topics of Interest to the *Owner* and *Driver*.

To which is added *more than eighty illustrations* of Garages of recent construction,  
showing both exterior and interior views and floor plans together  
with architect's working drawings for a

*TYPICAL GARAGE*



THE AMERICAN ARCHITECT  
// NEW YORK

MA7348  
AG

Copyright, 1911,  
by  
The American Architect



GARAGE, WITH CHAUFFEUR'S AND COACHMAN'S COTTAGES, BRISTOL, RHODE ISLAND  
Messrs. Kilham & Hopkins, Architects

# The Private Garage

By W. H. K. and J. C. H., *Architects*

THE coming of the automobile has introduced a new phase into the architect's daily work. The smart, shining, highly developed machine, quick, accurate and efficient, full of the very essence of modernity, with its irrepressible and confident chauffeur, seems to require more "chic" accommodations than did even the smartest horses and vehicles of the last generation. The age of the automobile is the age of cement, of high efficiency electric lighting and of the banishment of germs and crevices which harbor them. The garage must be modern, light, shining and not only clean, but free from any possibility of harboring dirt in any form. So, though the architect may still affect the homely and reliable bicycle as his own personal mode of locomotion, he enthusiastically approves the change in habits of clients which makes necessary the designing and providing of a new type of building.

This article assumes that it is written for the class of owner who desires a well developed building which will be an ornament to his place as well as a mere housing for his machine. One automobile can be protected from the weather by a building costing from \$300 up, or possibly even less. The writers know of garage, not without a certain "style," that was even built for \$100, but the owner who is looking for a substantial and reasonably fireproof structure should be prepared for a larger expenditure. If the house and other buildings of the owner possess any particular architectural quality it would seem reasonable that the garage should harmonize with them, but if the other buildings are not of any special type the owner is free to choose his materials and style.

At the outset it may not be amiss to refer to the subject of placing the garage on the site and the laying out of the roadway that approaches it. As

## GARAGES—COUNTRY AND SUBURBAN



REAR OF GARAGE AT BRISTOL, R. I.

Messrs. Kilham & Hopkins, Architects

commented on elsewhere, in the one-car garage, the shifting about of the car has to be done out of doors. As a rule, the car when returned to the garage will be run into the building "head first." When it is wanted to run the car out again, it will be necessary to back it out and turn it. Sometimes, owing to lack of ground space or improper laying out of the road, the car will have to be backed from the garage to the street. While this may not be difficult for a man, it often happens that the women of his family use the car, and it would be difficult and inconvenient for a woman to get the car out of the garage and pointed in the right direction.

It will therefore be seen that it is necessary to provide a space, laid out as a road, in front of the garage to give sufficient room to turn the car, or else, perhaps, install a turntable.

The size and character of the garage is influenced in many ways. It may vary from one to house a single car, a box-like structure without architectural treatment, to a more pretentious building providing accommodations for a number of cars with living quar-

ters for the chauffeurs, their families and assistants.

Whether the owner's house is already erected, and the garage is built later, or whether it forms one of a group of buildings, the materials used and the design employed would, under ordinary conditions, correspond to that of the house. It is therefore not possible to set down any fixed rule of style or material to be used. These matters can only be determined by the architect after he has studied the local conditions. There are, however, some general observations as to available and suitable materials, and features of planning, that it may not be unprofitable to consider. Even in the simplest form of building these will apply—they are the result of the experience of owners and drivers of cars. To ignore them would be to invite inconvenience and expense.

While, as indicated, the choice of materials used in construction will naturally correspond to those used in the house and other dependent buildings, it must be borne in mind that all garages are storage places for gasoline, oil and other combustible materials. The building, therefore, if a permanent structure, should

## GARAGES—COUNTRY AND SUBURBAN

be absolutely fireproof. Not alone because it must afford protection for its contents, but also on account of its usual proximity to other buildings it presents a serious "fire hazard" that materially affects the rate of insurance on all contiguous buildings. The ideal garage would be one using absolutely no combustible material in its construction. With Portland cement, hollow tile blocks and a great variety of brick available in most localities and at moderate cost, the problem of materials for the exterior walls of the garage seems practically solved, and the adaptability to certain schemes of ornament of these and other fireproof materials permits the architect to combine with the essential qualities of a strictly fireproof structure much good architectural detail. He may thus evolve a structure that will be more than merely utilitarian.

While the size of the building will, of course, vary, according to the importance of the owner's establishment, the provision of room for the visiting car or cars should never be omitted. Even where the owner is sure that he will never own but one car and that the visitor's car can go to the public garage, he should always be urged to provide more than enough room for his actual needs, for the second car follows easily after the first, and the friend's car will generally want to stay near its owner. The writer's firm has had a large experience in the planning of garages and has never known this prediction not to come true. The garage should always be planned to contain the largest size cars. A large touring car requires a space about 7 feet by 18, and should have not less than three feet all around it under any circumstances, especially if one cares for his own car. To this should be added space in the apparatus room for the lockers, where blankets, coats, etc., are kept—for the gasoline pump, and room to turn in going out, in case the door is not directly in front of the car, so that a width of 21 feet is advisable for a two-car building.

A fairly good and economical type is to build of thin brick walls with buttresses at corners and junction of interior and exterior walls, each space separated and used for one car only. This allows expansion and the use of the different compartments for shops, storage or even to stand a horse and carriage or visitor's automobile. By the use of the brick interior walls the roof is easily supported without expensive trusses or girders and can therefore be built in lightest possible manner. These interior brick walls make the spread of fire impossible.

Another good method for inexpensive but substantial construction is that shown by the detailed drawings of Mr. Anthony's garage at Beverly Farms. Here the concrete foundation is carried up in finished form two feet or so above the floor. This makes the lower

part of the walls (where gasoline vapor might collect) reasonably fireproof and saves much wear and tear on plaster or wood. Above the concrete the walls may continue in frame.

In cities or closely built suburbs where it is necessary to build close to the line of the lot the local ordinances generally prescribe fireproof construction for garages. The photograph of the garage in Brookline, Mass., shows a type of construction adapted for great economy of space. The walls are built of three-inch T-irons filled with porous terra-cotta block—wire lathed and plastered outside and inside.

### Planning the Exterior Walls and Roof

**C**ONSIDERING the building as a strictly fireproof structure, the different materials available in most localities would be about as follows:

Stone, either field stone or dressed.

Brick, or a combination of brick and stone.

Hollow hard burnt terra-cotta tile.

Light steel frame construction, with wire lath and stucco.

Concrete, either in the mass or with or without reinforcement of rods or fabric.

Concrete hollow tile and concrete blocks.

These or such combinations as the architect may decide on are all available. In the choice of materials, the architect and his client would be influenced by cost, in addition to the considerations already referred to. This would depend on the facility of getting material and the cost of labor. In some sections it is not yet possible to find labor sufficiently skilled in the technology of concrete to make it a safe and economical material in construction.

While the small, one-car garage may not be more than a simple, box-like structure, even here there are essentials of locating and proportioning the window and door openings that it is of importance to consider. It will be remembered that the modern gasoline or electrically driven vehicle is a complex machine, and to insure its highest efficiency must have the best of care. Not only should it be cleaned frequently, but it should be carefully overhauled to keep its parts in such condition that the best service will ensue. Even in the smaller garage there must be room to get about on all sides of the car, and the light should be so arranged that it will facilitate every necessary operation. The door openings should permit the entrance of the car with its top up to its fullest height, and the window sills sufficiently low that the entering light will

## GARAGES—COUNTRY AND SUBURBAN

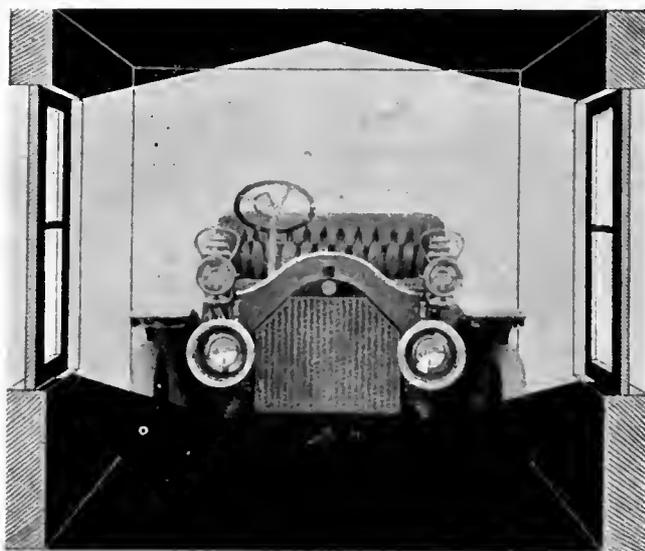


Fig. 1—Presents a narrow structure, with the windows the customary height, showing inefficient illumination with the machinery part in the darkness.

reach entirely under the car body without throwing heavy shadows. Daylight is the cheapest thing known and the only thing of which the price has not "gone up," and no owner should be compelled to burn electricity on account of the lack of windows in his garage. In case skylights are used, provision should be made for shades, so that the hot sunlight may not blister the finish of the cars. With reference to the height of window sills, Figs. 1, 2 and 3 illustrate how important it is to give attention to locating the sills.

The roof of the garage should be of slate, terra-cotta tile, tin, copper, asbestos shingles—some incombustible composite or fire resisting material.

Of course, the garage should have some means of

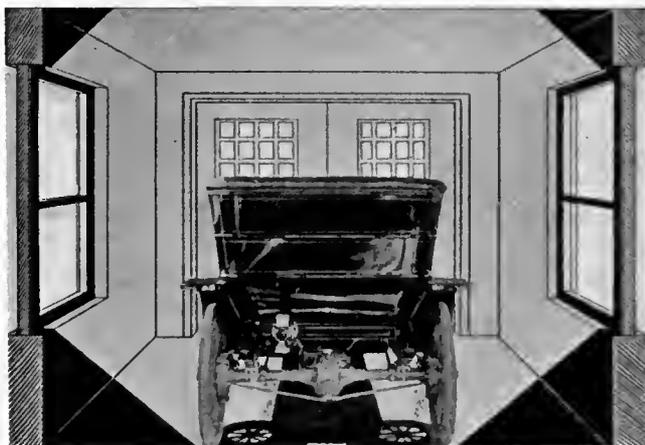


Fig. 2—The width of the building in proportion to the width of the car is such that the light strikes the floor outside of the line of the wheels with a good lighting effect.

natural ventilation aside from that furnished by the windows. Inlets along or just above the floor levels, with outlets near or in the ceiling, are the approved form. It will not do to overlook this most important feature, as aside from the necessity for carrying away gasoline vapors it insures easy and economical heating of the interior.

### Doors

**T**HE entrance doors should be nine feet, or nine feet six inches wide, if possible, with heavy guards to prevent the hubs from striking the jambs in case of bad steering, and with horizontal rollers set in the floor, in case the door slides, to keep the bottom in place. In calculating the height of a door it is well to remember that a limousine with a trunk on top may well be eight feet high or more, and something more must be allowed for the car tilting up

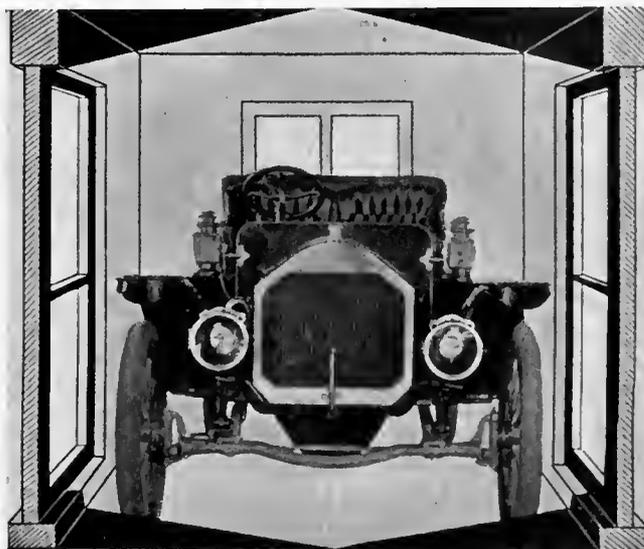


Fig. 3—A narrow structure with the windows passing down almost to the floor line and lighting up the machinery portion of the automobile.

in going up over the threshold, as shown in the illustration, Fig. 4. Our own practice is to keep on the safe side and never make a door less than nine feet high. A small door at the side saves opening the large heavy doors when it is not desired to take out the car.

### Interior Materials Used in Construction

**I**N small garages, used for gasoline automobiles only, the cement floor will be the logical choice. This should be constructed in the most substantial manner, and, as it will probably rest directly on the ground, care must be taken in its construction to pre-

## GARAGES—COUNTRY AND SUBURBAN

vent upheaval by frosts or sinking by reason of faulty workmanship or shallowness of construction. The cement floor is permanent, and while its surface may be easily repaired, radical changes would be expensive. It will be necessary to anticipate certain details of floor construction in order to secure the best results.

Ignoring the possibility of the construction of a pit in the floor, this feature being left for future discussion, and as the care of the car, particularly its washing, must be provided for inside the garage, some provision should be made to carry off the water. It will be necessary to introduce a drain for this purpose. This drain in the small garage may be of the "blind" type. The floor should be slightly "dished," the drain outlet in the center. Converging grooves in the floor will not be necessary—in fact, they should be avoided, as they form lodging places for oil and dirt and consequent untidiness of the interior.

The dishing of the floor should be so arranged that the car will never stand on a side slope. The interior finish of the private garage may follow the principle of the so-called "sanitary trim" of modern houses, particularly in kitchens and pantries, where all right-angled corners are avoided, and the floor and ceiling angles rounded to permit perfect cleaning. The finish of the interior walls would naturally depend on the character of the materials used on the exterior.

Projections for shelves and closets, that might interfere with the entrance and exits of the car, should be avoided. These necessary features are best placed along the rear walls, or if on the side walls, as far towards the rear as possible. All lockers, shelves, racks and similar utilities should be of metal. As many firms supply this line of fixtures their cost is not pro-



Fig. 4—Showing a limousine passing through the door with the front wheels on the runway and an incline such as will cause the back of the limousine to strike the top of the door framing.

hibitive, and as the added feature of safety from fire is important, and as they are practically indestructible, it is urgently advised not to use wood for these essentials.

To avoid as far as possible during hours of daylight the use of any form of artificial light, the interior walls should be light and reflective in color, preferably white, that the interior may be as bright as possible. Dark corners are to be avoided, not only because they are the places less liable to be kept clean, but for the further good reason that one never knows just what part of the car may demand attention. A well lighted garage, even of the smallest, is much to be desired.

For the walls, white, glazed tile would be ideal.

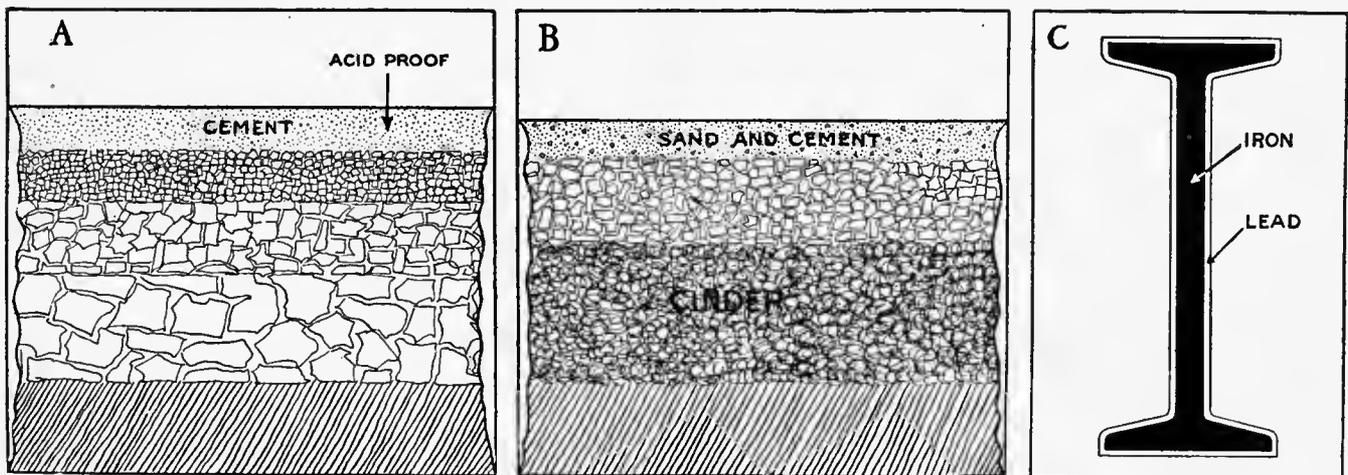


Fig. 5—A presents an acid proof cement floor employing neat cement for the top layer, and broken granite with cement beneath. B, cement floor using ordinary cement on a cinder bed when gasoline automobiles are stored. C, lead sheathing over ironwork to render it acid proof in an electrical garage.

## GARAGES—COUNTRY AND SUBURBAN

This carried up as a wainscot to about five feet, with the remaining wall surface either of white cement or cement painted white, makes a good interior finish.

All wall and ceiling surfaces should be as non-absorbent as possible, so as not to hold the dampness created in washing and to prevent the staining consequent on the careless handling of oil and waste. Cleanliness is a first essential in the care of the motor car, and every feature of construction that insures this is important.

### Floor of Garage for an Electric Automobile

**S**HOULD the garage be devoted to the storage of an electric automobile, if the battery is of the lead-lead genera, and provided it is to be charged by means of a suitable equipment attached to the garage, there is an excellent opportunity to induce a relatively high depreciation of the floor, in view of the fact that the sulphuric acid electrolyte used in the battery will attack ordinary grades of cement, and if this condition goes on sufficiently, the floor will be destroyed.

To get around trouble of this sort, the plan as indicated in Fig. 3 may be accepted. In this plan, the lower strata is broken granite, coarse at the bottom, and tapered off to sizes which will pass through a one-inch mesh, the whole occupying a depth of say four inches. The next layer is made up of broken granite in sizes which will pass a  $\frac{3}{4}$ -inch mesh and is grouted down, using acid-proof cement in fine granite screenings for the layer next to the top to a depth of possibly two inches, and finally neat acid-proof cement to a depth of three-quarters of an inch for the top coat. Fig. 5 shows how iron work may be protected from the corroding effect of acid and its fumes, which come from charging the battery; the plan comprises sheathing over the iron work with thin sheet lead. In a small establishment this sort of thing should not be necessary; iron work may be avoided.

If the building is well ventilated the question of the acid action on the surrounding metal will be lessened in any case, but it is necessary to settle a matter of this sort when the structure is being planned.

### The Pit

**W**HILE the introduction of a pit into the floor of the garage may present some good features of utility and convenience, it is well to keep in mind that it also serves as a lurking place for gasoline vapors. It will be necessary when

constructing the pit to give due regard to this. It is important that all corners of the pit should be rounded so that it may be cleaned thoroughly. Proper drainage should be provided with ventilating inlets at the bottom to insure sufficient motion of air to carry away the gasoline vapors that would otherwise lurk in the bottom of the pit. A side exit should always be provided if possible, as several bad accidents have been caused to men caught in a pit by an explosion and unable to escape. This exit is readily arranged for when the building is on a side hill. It is also important that the drain in the bottom of the pit should be properly trapped. In a small private garage the best way to avoid complications is to do away with sewer connections. If for any reason one is desirable, it will be well to give attention to a suitable trap, having in mind the fact that gasoline vapor is sure to form in the sewer

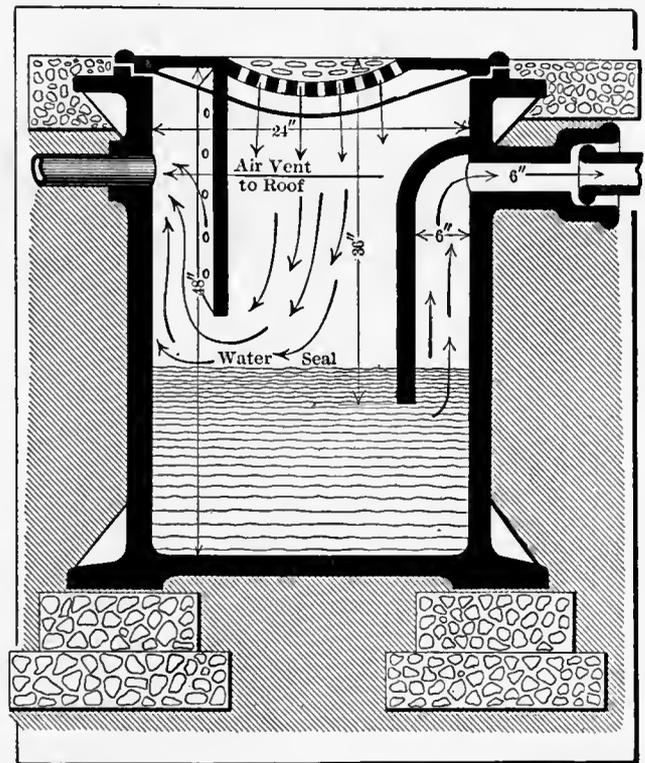


Fig. 6—Well hole so shaped as to serve as a safety trap at the sewer opening in a garage, with means for preventing gas from entering the sewer, and a draught pipe to dispose of the gas.

openings, and when accumulated in sufficient volume presents a source of much danger.

Fig. 6 shows a form of "well" particularly adapted to public garages. It has been demonstrated as correct and a smaller and equally efficient trap may be constructed embodying these principles to meet the requirements of the private garage. In the example

## GARAGES—COUNTRY AND SUBURBAN

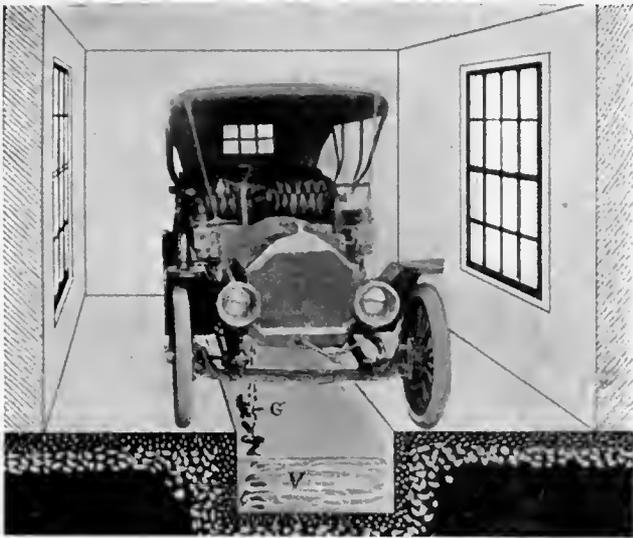


Fig. 7—Section of a garage showing a pit under the automobile to accommodate the workman and to trap in accumulations of explosive mixture.

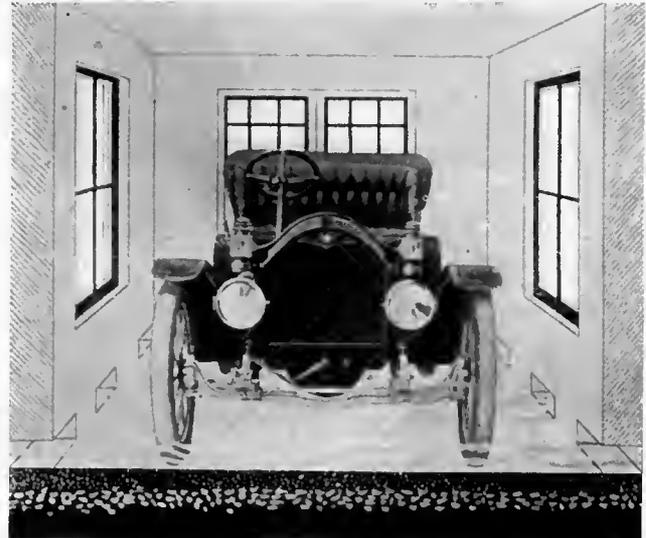


Fig. 8—Garage floor without a pit; openings in the walls near the floor, mixture of air and gasoline being swept away by air currents which are formed by draughts set up.

illustrated the cover of the "well" is perforated, the floor is supposed to slope toward the well, and when water drains into it from the surrounding floor, it passes down and forms a seal; excess water will then pass out through the sewer connection. By connecting the lead from the air vent to a stand-pipe, which should lead to the roof of the structure, a current of air will be set up and the gasoline vapor will be conducted up to the roof, and thence to the outer air. In a private establishment, especially if it is in the wooden district, with little room to spare, all the precautions as here intimated and many more, as set forth in the various insurance rules, as promulgated by the Board of Fire Underwriters for the respective districts, should be observed.

In locating the pit in the floor of the garage, it is well to select a place where it will not, while open, interfere with the maneuvering space. As the pit is constructed primarily to give easy access to the underbody of the car, it may be located near the side walls. A feature often lost sight of is provision for entering and leaving the pit while the car is over it. To crawl out of a pit during use is difficult, and also unnecessary, if proper attention is given at the outset to this feature. A good size for the pit is 10 ft. by 3 ft. 6 in. and 4 ft., or 4 ft. 6 in. deep. Seats in each side are a convenience for the mechanic, and may be 18 in. high and 12 in. wide. This length is such as to admit of a short flight of steps to reach the bottom, making it possible to move the car backward and forward, often very desirable. While it is economy to have the fewest possible tools, it is often well to have duplicates so that

they may be near at hand. It would, therefore, be well to have certain tools in the pit and a place to keep them. This may be easily arranged by a pocket or recess in the side wall of the pit, protected by a door or cover in which to store such tools as experience teaches are most likely to be required. One owner has in the end of his pit an oaken board about eight inches wide, serving as a bench, on which is a small vise to hold parts that it is often necessary to give some minor attention in adjustment. This obviates many trips to the bench and loss of time.

If the garage is situated on a side hill, as, for example, some of the buildings illustrated, the pit question becomes a simple one. In fact, it ceases to be a pit, for a trap door in the floor is all that is necessary, which with a platform below the proper height, or one with a series of steps to provide for varying heights and reaches, easy access to the under parts is obtained. This perhaps is the best arrangement that can be devised. In the basement would also be an ideal place for the workshop and tools, but it will, of course, be necessary to provide for light and insure against dampness.


There have been many ingenious devices introduced in garages by owners whose mechanical bent makes the care of the car one of its most interesting features. These men, as a rule of professional and commercial activities, find mental relaxation in this mechanical exercise.

An improved movable trestle, to do away with the pit, is described and illustrated in a recent issue of *The Automobile*; we quote: "The necessity for a pit

## GARAGES—COUNTRY AND SUBURBAN

not being realized until after the house had been built, a pair of comparatively small and light horses were built, or more correctly, a pair of trestles. These were 31 inches high and built strongly enough to support a car, the length being just sufficient to care for the whole length of the car.

"Of course, this was flat on top so that the car would stand on it of itself. So some method of getting the car up onto the top was necessary. For this purpose another short, inclined pair of trestles were built. Then to get the car onto the 'pit' the two sets of flat topped trestles were drawn to the center of the floor. Next the two inclined members were set into

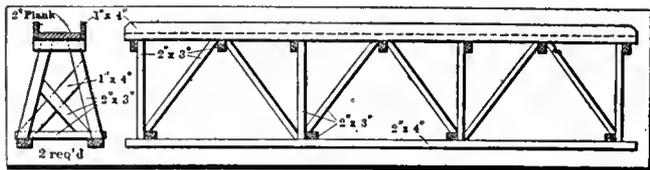


Trestle with Flat Top Which Serves as a Pit.

place in the front, and the car could then be driven onto it.


"In this position it was just high enough to permit working under the car, but since this meant much stooping and looking upward, one of which was hard on the back and the other tiresome to the eyes and neck, the owner built a reclining chair. This he used as a seat, pulling it under the part of the car upon which he wanted to work, or removing it when there was no necessity for it. The back of this was adjustable to any inclination, which was very handy at times, and being simple, could be altered very quickly, to suit the needs of the occasion. It is shown in detail in the illustration.

When there was no work to be done upon the car the four trestles and the seat were set aside in a corner or elsewhere, the size of the house allowing room for

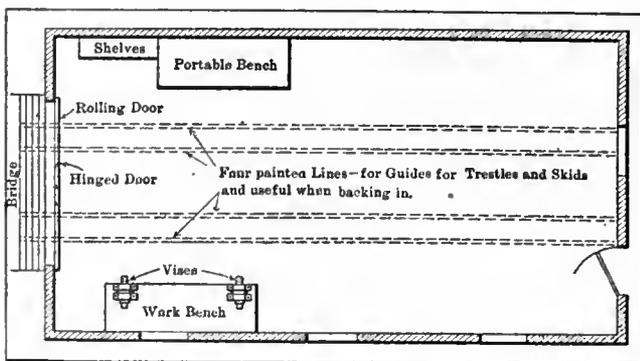

it. In this way the whole floor was kept unbroken by openings. In addition, it left the whole floor for

maneuvering space. Being practically indestructible, the whole outfit could be carried outside if at any time

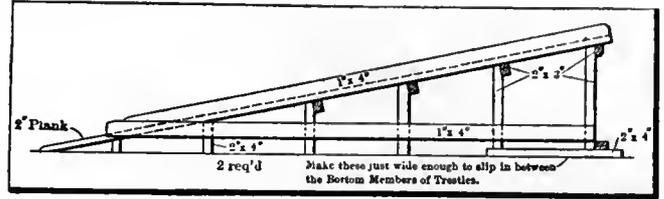


Trestle with Flat Top Which Serves as a Pit.

it was desirable or advisable to use the whole interior for cars, as in the case of several visiting cars."

### The Handling and Storage of Gasoline

**S**AFE handling of fuel in the private garage is difficult and requires constant care. A writer in *The Automobile* discussing this subject states:

"If it may be taken for granted that the 'hand-to-mouth' method of obtaining gasoline is not a good one on the ground that it has its decided uncertainties, even so, the Board of Fire Underwriters will object to the presence of more than ten gallons of gasoline in a garage, unless provision is made for its proper storage.

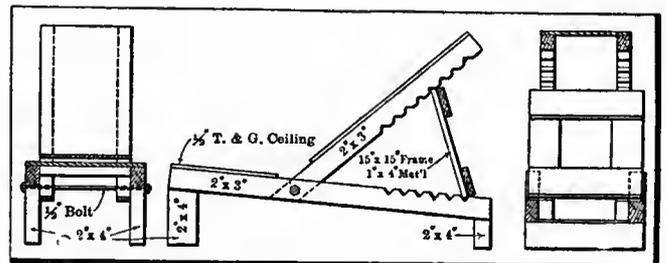

Home-Made Morris Chair to Eliminate Backaches.

It will also be remembered that the cost increases substantially 50 per cent when the fuel is purchased in ten-gallon packages, instead of by the barrel; then, too, it is a better grade of fuel as a rule which comes in the original barrel.

"Fig. 9 shows the customary manner of disposing of the fuel problem. A steel fuel tank is buried outside of the building line of the garage, and a supply pipe is led from the tank to a measuring pump, which may be placed at any convenient point within the building. The pump should be free from leaks, so that gasoline will not be spilled about, or else it should be placed in a suitably contrived fireproof closet with proper means of ventilation. All these details, in any event, will best be cared for by consulting the rules and regulations of the Board of Fire

## GARAGES—COUNTRY AND SUBURBAN



INTERIOR OF GARAGE FOR MR. BERNARD JENNY, JR., BROOKLINE, MASS.  
Messrs. Kilham & Hopkins, Architects

Showing work bench, tool case, revolving auto washer, telephone and accessories

Underwriters having jurisdiction, and it will be well to remember that the respective boards in the several districts do not always agree as to the efficiency of a plan. Money will be saved by consulting the rules and regulations of the board first, and making the plans in the light of information obtained."

The gasoline pump may be located in a corner near the door connected by a pipe to the tank,\* which is buried about thirty feet from the building, but with its filler pipe near the drive, so as to be easily filled from the tank wagon. The measuring pumps are the most satisfactory. A good plan is to have two tanks so that when one is exhausted notice is automatically given to replenish the supply.

\*Tank should be thirty feet or more from the building and the filler pipe should be near a driveway so as to be easily reached by the gasoline wagon.

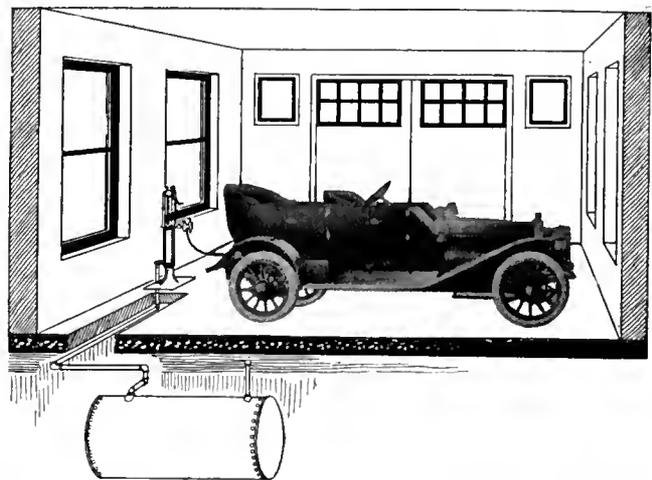


Fig. 9—Section of a garage showing source of gasoline supply, method of piping, and a measuring pump within.

## GARAGES—COUNTRY AND SUBURBAN

It will be seen that in the method illustrated the only fuel in the building is that contained in the tank on the car. It seems unnecessary to state that this tank should always be closed, as should also the stop cock on the feed pipe. Most accidents occurring from gasoline explosions are due to the carelessness of constant use. Treating it as one would gunpowder or dynamite—as an always dangerous explosive—is the only way to safeguard against explosion and the oftentimes serious attending consequences.

The storage of lubricating oil and greases, while a less serious problem than that of gasoline, is equally important. The quantity kept on hand will depend on the number of cars in use, but even the small quantity necessary for one car should be stored in metal tanks and boxes provided with the necessary faucets and drip pans to prevent its spread about the floor. Perhaps the chief source of untidiness in the garage is the careless handling of oil and waste. For the latter, metal cans with tight covers should be provided, and these should be emptied and their contents burned

every day. Spontaneous combustion is a frequent cause of fire, and a waste can, filled with cotton waste saturated with gasoline and oil, presents an ideal method of starting a conflagration.

### The Interior Plan with Reference to the Proper Care of the Car

**E**VERY owner and driver should know his car and how to care for it. To do this properly necessitates a work bench, tools to work with and the proper facilities for their use. Even in the one-car building these utilities should be preferably located at the rear of the garage. The bench should be so placed that the worker will not obstruct the light, and the tools, as few as possible, be above the bench, along the wall within easy reach. Avoid the keeping of tools on the floor.

If a man has the natural ingenuity and ability to



INTERIOR OF GARAGE, BRISTOL, R. I.; VIEW OF WARDROBE  
Messrs. Kilham & Hopkins, Architects

## GARAGES—COUNTRY AND SUBURBAN

work with a few tools, so much the better. They should be of the highest quality—always cheapest in the end.

A good foot lathe and its usual equipment of taps and dies will often enable an owner or competent chauffeur to effect a saving in repairs that will many times repay its cost.

Adding to this the usual equipment that comes with the car and such few additional tools as experience may suggest, the garage is ready to care for ordinary repairs. As the owner gains experience in the care of his machine, it would be advisable to add a vulcanizer. Tire troubles are many, but with a vulcanizer considerable outlay may be saved.

### The Work Room

**T**HE work room is an appurtenance which may be classed as a "frill," but which probably develops more actual pleasure to the owner and his chauffeur than the car itself. This room frequently contains the heating apparatus and sometimes a forge—hence, as fire is present, it should always be separated from the apparatus room by a partition wall, of masonry if possible, and if possible by a tinned self-



GARAGE AT BRISTOL, R. I., SHOWING PORTION OF MACHINE SHOP  
Messrs. Kilham & Hopkins, Architects

closing door. A good work bench should be installed as part of the building contract, together with a neat cupboard for tools, while the space under the bench may be utilized by cupboards for oil cans, etc., or wide

shelves for spare tires. Every motor car owner will have his own ideas as to what machine tools to install in his garage, and a set which pleases one man perfectly will be thought useless by another. The following set, costing about \$1,200, erected, is suggested as a practical equipment for a first-class private garage.

- One Flather engine lathe, 14 in. x 6 ft.
- One Blount grinder, with emery wheel truing device.
- One anvil.
- One air compressor, with tank, etc.
- One Buffalo hand forge.
- One one-spindle drill.
- One one-horsepower motor for above.
- One Coates's breast drill and buffer, with one-quarter-horsepower motor.
- Shafting, hangers, etc., for above.

### The Wardrobe


**T**HE automobile requires a wardrobe of its own. Special blankets, coats, hats, goggles have always been necessary *per se*, but now these must harmonize with the color of the car or the "class" of the turnout is lost. With several cars this situation becomes complicated and requires storage space, even in a one-car garage. Somewhere in the building near the door there should be a cupboard with deep drawers for blankets, a closet for motor coats, with shelf for hats, etc., and a compartment for other accessories. Near the sea coast it is well to have galvanized nettings in the doors on account of dampness. Poles for blankets to dry on are placed along the walls.

### Plumbing

**A** DEEP enameled or galvanized sink should be provided somewhere in the building, with a supply of hot and cold water. The hot water may come from a regular system, or may be drawn from a hot water heater, or in simple buildings may be heated in a copper tank on top of a stove.

Over the washing floor is located a revolving auto-washer, the carriage washer of earlier days with a new name—a swinging section of iron pipe with its end turned down at right angles and ready for attaching a hose.

A water closet for the chauffeur (and a bath in case his chamber is located in the building) with a sill cock or two, completes the list of plumbing accessories that are actually necessary.

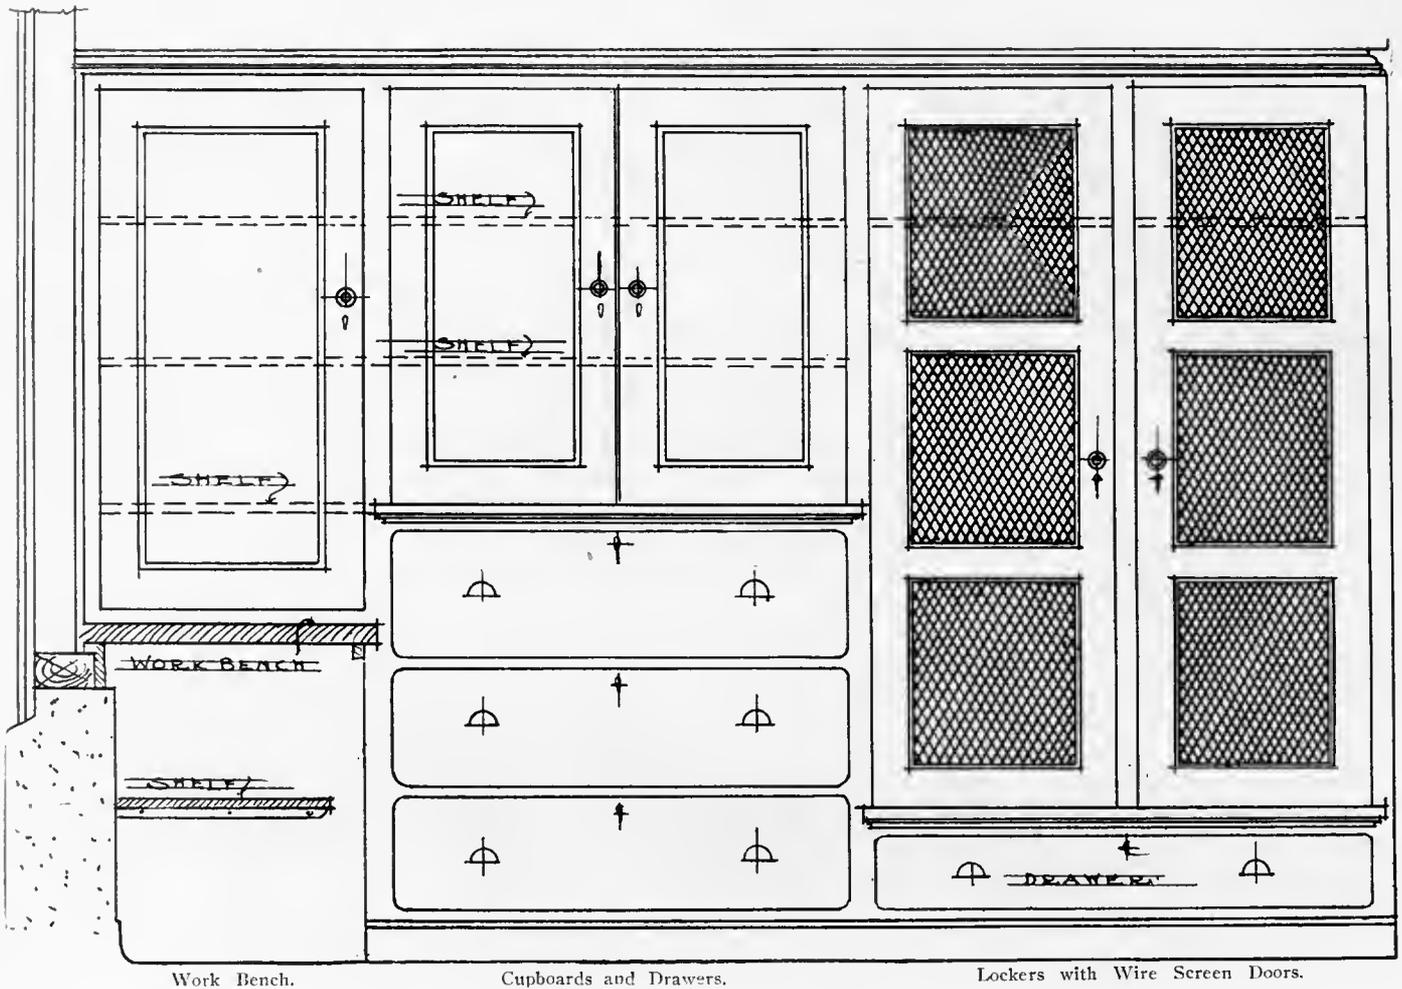

DETAIL OF LOCKERS IN SHOP  
Kilham & Hopkins, Architects


Heating

THE proper heating of the garage, is not, as may seem inconsistent to state, to keep the interior warm, although this is of course desirable, but to prevent the water in the jackets from freezing and the oil in the gear and crank cases from congealing.

The system of heating used in the private garage will of course depend on local conditions. While some owners may prefer stoves, either oil or coal, they are not for obvious reasons to be recommended. The logical means, we believe, is either steam or hot water.


It will be interesting to note how this heating may be handled in two ways, directly opposite in their relation to the house and the garage, both equally efficient. Given a one-car garage on the ordinary suburban lot, it will probably be sufficiently near the house to admit of a pipe run under ground and connected with the house heating system. If the garage is a large one, and space is available, a room might be planned without direct access to the storage part of the garage to accommodate a heating plant that would serve both the house and the garage.

The plan of a two-car garage illustrated on this page shows a complete heating plant. It will be noticed that the radiators are wherever possible located under the window openings.

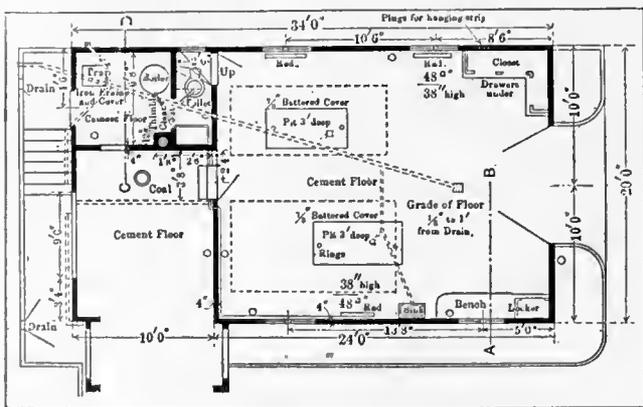

Plan of Two-Car Garage with Complete Heating Plant

## GARAGES—COUNTRY AND SUBURBAN

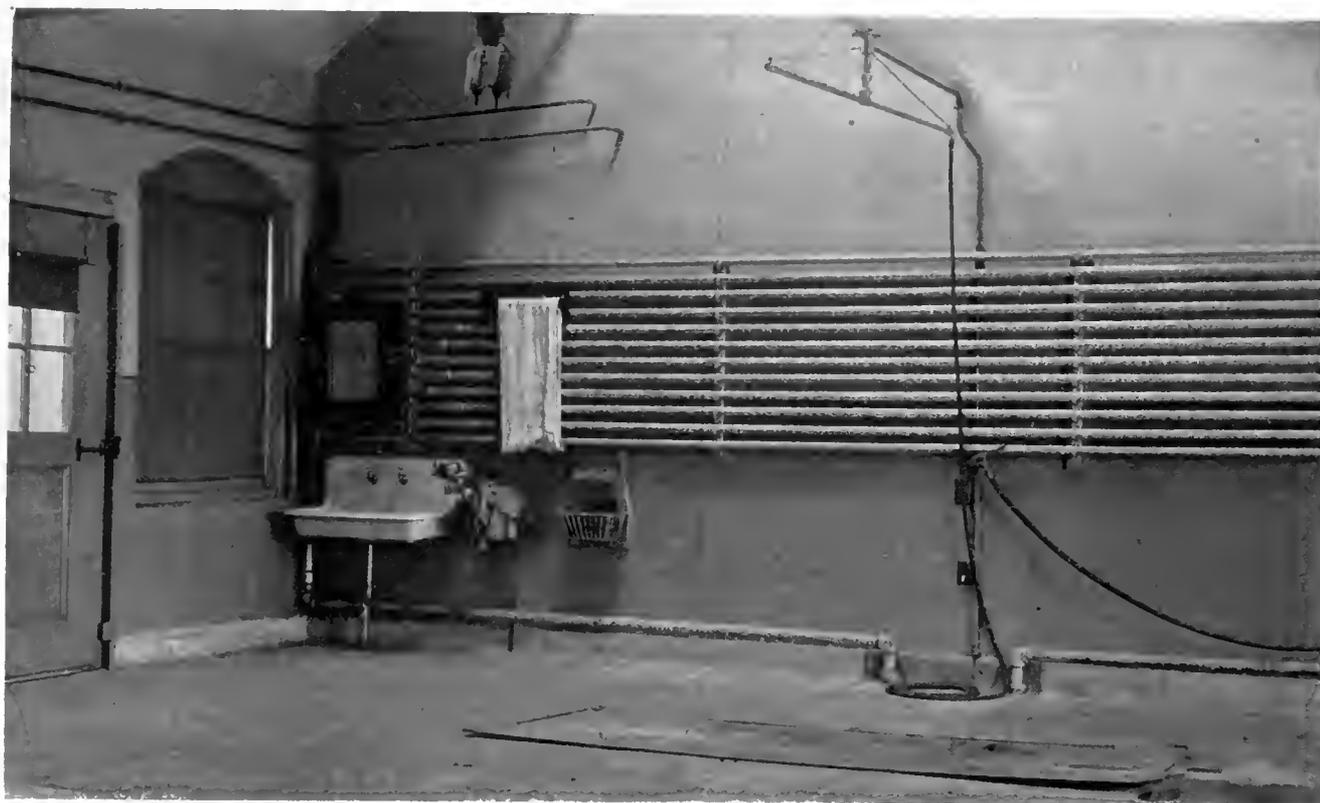

INTERIOR OF GARAGE AT BRISTOL, R. I.

Messrs. Kilham & Hopkins, Architects

Showing sink, Cooper-Hewitt lamps and auto washer; heating pipes are placed high to avoid splashing

### Lighting

**A**S the electric current is now so generally available for lighting purposes this form of artificial lighting for the interior of the garage will be given first consideration.

There should be plenty of light everywhere about the garage. A good light outside over the door is obviously needed and plenty of light for the work bench. For the apparatus room opinions differ as to the kind of lighting. A very fair illumination may be obtained by the use of tungsten lamps in high efficiency shades, arranged so as to light the sides (not the tops) of the cars. The mercury vapor lamps, which give a greenish light, seem to be associated with garages, and they are certainly very efficient, having high illuminating power, low current consumption, and are not fatiguing to the eyes.

Several sockets for attaching plugs should be placed around the room for attaching hand lamps with wire guards, but all sockets and switches should be kept well out of the wet. Each little basket covered lamp will prove to be a "life saver" when looking for leaks in packings, loose connections, or any other one of the thousand mysteries which are always needing to be tracked to their lair and fixed.

While it may not be necessary to use all the lights installed at the same time convenience suggests that there be outlets and plugs set at places where they are apt to be most needed. A three-branch cluster in the center of the ceiling and at least two brackets on the side walls would seem to be a minimum of fixed lights. The side brackets should be connected with a switch at the entrance so that the light may be turned on or off on entering or leaving the garage. There should be at least two lights, properly placed over the work bench, with reflectors to throw the light directly on to the bench.

In addition there should be outlets along the base—one over the bench and not less than two, one on each side of the pit. Where in case of repairs made at night an iron standard carrying as many plugs and lamps as may be desired is a necessity. This should have a wide base, be adjustable as to height, and light enough to be easily moved about the garage. It would be well to place casters on all but one foot of this support.

With an equipment of the kind described every part of the garage and every part of the car can be easily and quickly illuminated and the work in hand greatly facilitated.

## GARAGES—COUNTRY AND SUBURBAN


While other forms of lighting, by gas (either city supply or acetylene) or lamps, can be used where electric light is not available, they have not the same elements of "flexibility and safety" that electricity has and would not present the many conveniences that are at the command of the owner who can install the electric current.

### Washing

**W**HILE nearly everyone will grant that adequate washing facilities are desirable, few would regard them as also economical. This is nevertheless true, for with improved and handy means for washing the car will be washed more regularly, more promptly and more thoroughly. This applies not alone to the painted parts of the body, but to many of the mechanical parts as well. To cite an excellent example (not a mechanical part, however), the wheels cannot be washed too much, particularly in warm weather.

Heat opens the joints in the wheels, while plenty of water will cause the wood to swell, thus closing the cracks. This applies to the miter as well as the felloe, to say nothing of the tenons, spokes into felloe.

The overhead washer, two of which are pictured on this page, presents some ideas which cannot be obtained in any other way, and are desirable. This form

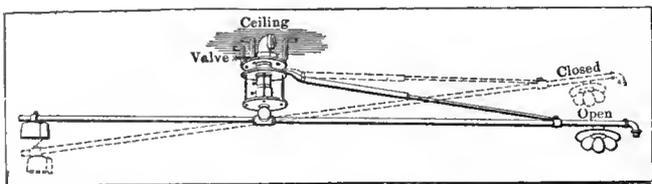


Overhead Washer with Weighted Arm and Cutoff

is always up out of the way, when not wanted, and aided by the hinged joint may be pulled down for use. The one shown first is weighted so as to balance itself in any position in which it is placed.

In the second one the construction is such as to suggest the making of a washer-using water pipe, obtainable at any plumbing shop. The only problem would be the swivel joint at the pivot point, but the plumber could doubtless furnish a full universal swivel which could be used for this purpose. In that case, making one of these is simply a question of knack with a stilson wrench and other pipe-fitting tools. The corner would be a simple elbow and the angle brace a pair of tees, with the tee end plugged, and the plugs drilled

for the wire cable. This, in turn, could be made with turnbuckle in the middle, so as not only to tighten it

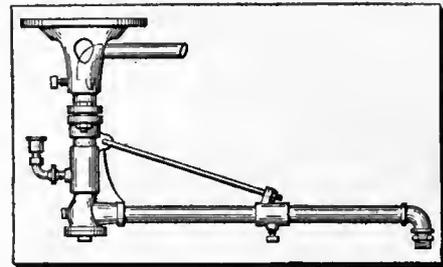

Overhead Washer Not Weighted

up at first, but to allow of later tightening, as opportunity presented or as it was found to be needed.

### The Portable Garage

**O**WNERS of automobiles who have first acquired a car as a luxury ultimately find that it has become a necessity. Vacations, outings and journeys from home, all are based on the ability of his car to get him where he wants to go, serve his convenience after he has arrived and bring him safely back. He plans his camp site or selects his cottage where he will spend the summer with his family, with special reference to the conveniences at hand for housing his car.


Now that portable garages are available he has a wider range of selection and can afford to ignore the fact that there are no permanent garages near by. He no longer is compelled to adapt some stable to his needs, and suffer all the attendant disadvantages. The portable garage has solved this question in a most satisfactory manner.

Elsewhere will be found several views of one of the portable garages now on the market. The plan shows that it is about 13 feet wide by 19 feet long inside. Of this, however, not all is available, some room being taken up by a large work bench, a cupboard and other conveniences. These cut the available floor space to about 12 feet by 16 feet.

There is a double door at the front, measuring 8 feet in width by 8 feet 6 inches in height. The latter is made large to allow of the car entering with the top up. In addition there is a small, narrow side door.


Two windows on each side, with two smaller ones at the back furnish plenty of light, the back windows being grouped over the work bench. These windows are all too high from the floor to supply the best angle of light to the interior. The foundation is more in the nature of a suggestion than a necessity. This is not

GARAGES—COUNTRY AND SUBURBAN

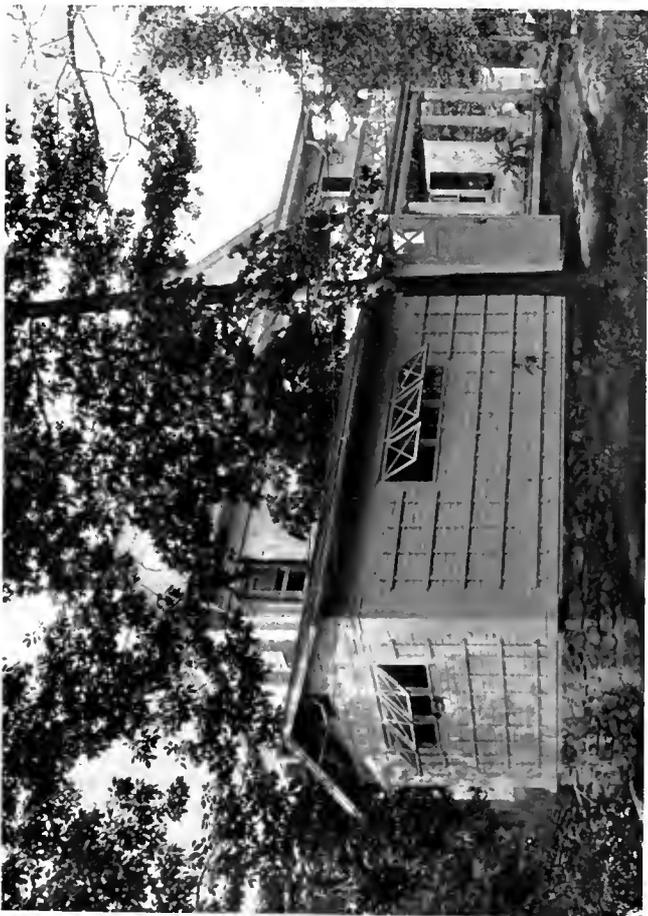

EXTERIOR AND INTERIOR VIEWS OF AN APPROVED FORM OF PORTABLE GARAGE

## GARAGES—COUNTRY AND SUBURBAN

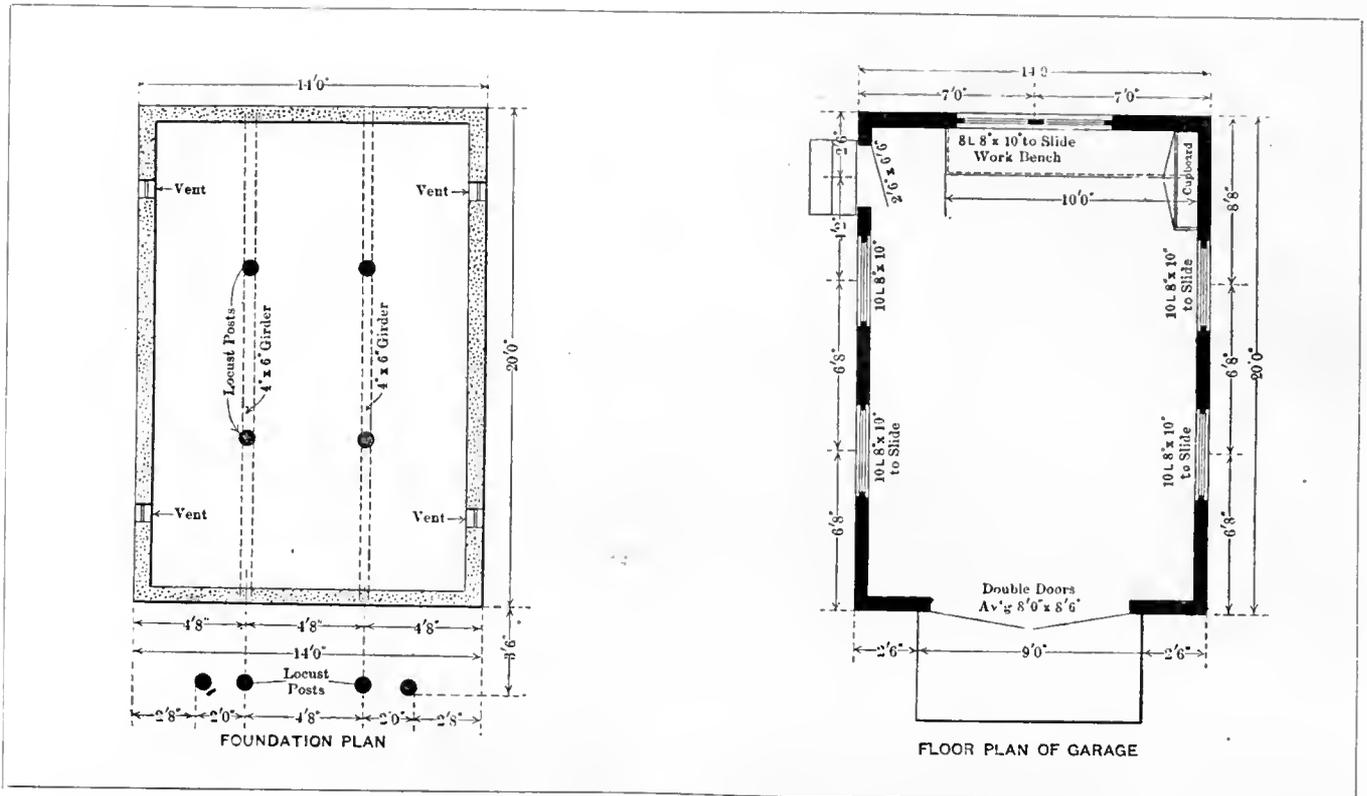

FOUNDATION AND FLOOR PLANS OF SMALL ONE-CAR WOODEN PORTABLE GARAGE

furnished by the makers of the garage, the plan being given to enable the prospective buyer to provide a concrete or stone foundation if he so desires. The locust posts, indicated by the round black spots, are furnished, these being 3 feet 6 inches long. Four of these are in front, and are for the support of the inclined platform or runway to be built there. The other four located in the middle are real foundation posts, in addition to which there are two more to form a foundation for a platform leading to the side door, these not being shown.

When foundations are laid a single width of brick, that is 8 inches, is recommended, or this same width in cement or concrete. A description of some of the other features may be of sufficient interest to warrant the space, so will be given.

The structure is designed with two lines of girders, giving a double support directly under the car. All exposed framing material is dressed lumber, while the walls and roof framing are well braced. The roof is sheathed over with a sheathing of surfaced boards laid tight. Over this shingles are laid, making a simple but good roof sure to be waterproof. Slate, tin, steel, or any roof composition may be had if desired, but not being regular, cost more. The cost of this house, as shown in the two plans, elevations and exterior and interior views, is roughly between \$175 and \$185 at


the manufacturer's factory. This with the freight and charges for erection brings the whole cost up to about \$225, which makes a very serviceable garage at low cost.

### The Garage for More Than One Car

**W**HILE every class of building should, for æsthetic reasons, possess some measure of architectural expression, it is more difficult to impart this to the one-car garage than to the larger structure. Reference to the plate illustrations in this volume will show that artistic effect may be secured in even the smallest garages, involving a modest expenditure, if the work is intrusted to the capable architect.

"Rule of thumb" design and construction are never satisfactory. The added cost of the architect's fee is really economy. The size of the garage, its plan and equipment, will be influenced by the number of cars to be stored, to which must be added the necessary maneuvering space. A single-car garage necessitates that the shifting around be done out of doors, but in larger buildings the usual obstructions will demand some means of easily placing the car in the position assigned to it. The floor area should be computed on a basis of one car more than the number to be stored.

## GARAGES—COUNTRY AND SUBURBAN

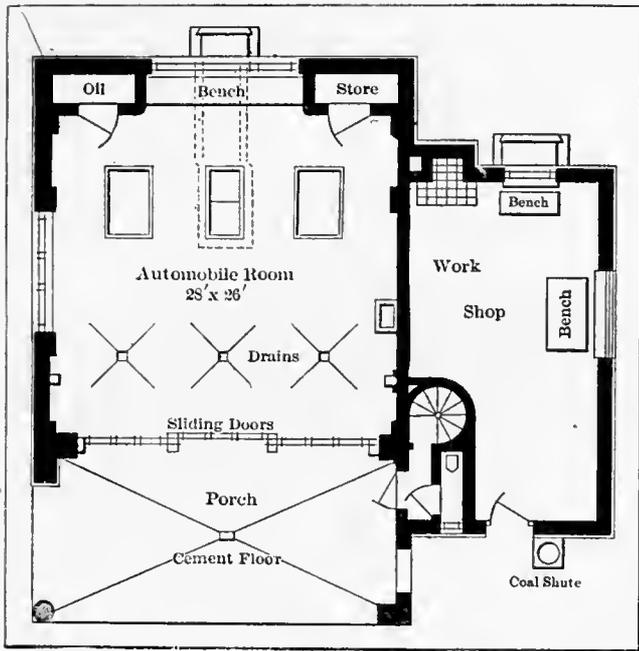

**Plan of Garage Combining Original Features**

This additional space will be for the pit, on the closed top of which, in the absence of a turntable, the cars may be shifted.

### The Turntable

**T**HE use of the latest turntable is almost a necessity, either inside or even outside the garage. They are so arranged that they can be used as a washing platform, being provided with dished surface and drained at the center. They are especially convenient in a garage of three cars and up, where the size of available land is restricted, as in the city or in the many very popular summer resorts.

The maneuvering space needed when more than two cars are housed is very considerable. In this connection the turntable forms a very useful adjunct to the modern large garage, for it economizes on the floor space. That is to say, having a turntable in the center of the floor does not cut out any of the floor space as a pit does. It allows swinging cars around within its own narrow confines and with absolutely no maneuvering other than a straight ahead run onto the turntable and another similar run off.


Aside from the big house, where it saves space, and thus first cost, it is of great and daily use in the small well-equipped house, where it saves much work, either of pushing the car by brute strength, or by carrying in fuel, starting a cold engine, and then backing and filling until the required location is obtained. On page

17 is shown a design for a small garage in which this feature is included. The outside width of 23 feet is, like the length of 26 feet, ample. Although large, it is not any too large when the projected pit, lathe space, oil and gas pump space, lockers, bench, and toilet are all taken into account. Sliding doors are figured upon as economical of space and more handy to open and close than the hinged variety.

Elsewhere on this page is shown a concrete garage showing a number of novel and interesting features. The drawing shows only the ground floor plan, the second story being devoted to living rooms for the chauffeur.

Three cars are provided for. The provision, in marked contrast to the usual case, is in triplicate, three pits and three washstands being provided, as well as three doors. The front end of the house includes a porch with cement floor and housed over by the living rooms above. This would, without doubt, be used for most of the washing done in fine weather, in preference to the washstands within. In fact, it would appear as if the designer, a well-known Chicago architect, had this idea in mind.

Most notable in the whole design is the large and very roomy workshop provided alongside of the motor room, yet entirely separated from the latter by a thick solid wall. This would reduce the fire hazard very materially were the gasoline kept in the work room.

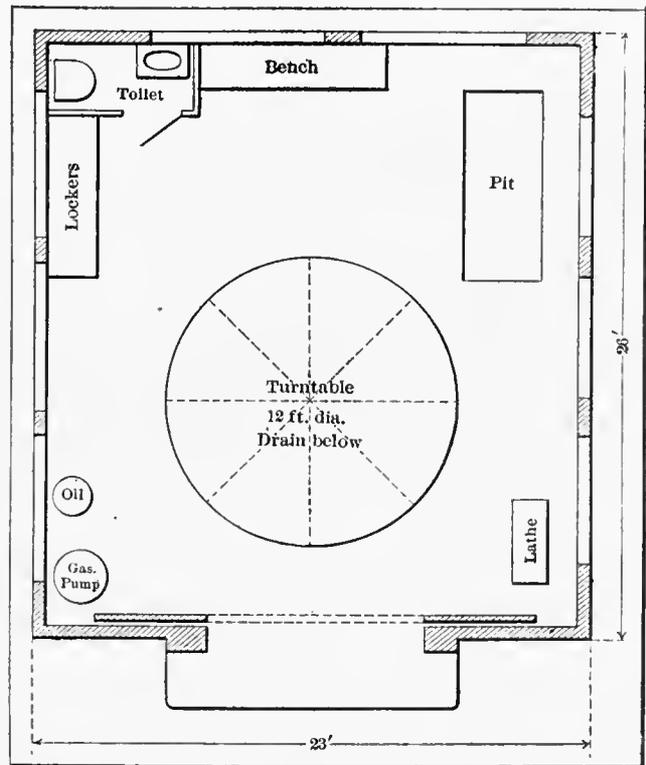

**Suggestion for Large and Well-Equipped Garage**

## GARAGES—COUNTRY AND SUBURBAN



GARAGE AT BROOKLINE, MASS.  
Messrs. Kilham & Hopkins, Architects

Fireproof construction, built of T-irons, fitted with terra-cotta blocks and plastered inside and outside

The floor plan, however, does not indicate this, and the oil being in the automobile room, one is forced to the conclusion that the fuel was kept there as well. In that contingency, not only is the fire hazard not reduced, but, on the other hand, all parts or units to be worked upon would of a necessity have to be taken out of the car, carried outside through the big sliding doors, and then back into the work room through the front door. The same process would have to be gone through after the repair had been effected.

Among the good features may be noted the location of all work benches—there are three shown—in front of windows. The only work bench in the automobile room is placed at the back in front of the large and wide window, while the two benches in the shop are placed directly in front of the only windows in that room.

The foregoing represents most of the requirements of an up-to-date house for the automobile. Accessories may be multiplied as much as the owner's purse will allow or his imagination suggest. A telephone to the house is a necessity, of course, but there are many appliances which have no real use. While much thought and care must be expended on the selection and operation of the car itself, probably nothing helps to round out and complete the pleasures of motoring like a sensibly equipped, convenient and picturesque garage.

No one yet ever regretted the expense put into the garage. As much avoidance of annoyance comes from the well-planned garage as pleasure from the car. Let the little building be picturesque and attractive outside, surrounded by hollyhocks and asters, and inside be bright, shining, practical and clean.

# The Safe Handling and Storage of Gasoline and Lubricating Oil

**T**O those who in any degree understand the nature of gasoline the term is synonymous with danger both to life and property. Its gas, like almost any other gas, may explode or may burn, depending on conditions surrounding it at the time it is brought in contact with the flame. But if one is to intelligently discuss the hazards incident to the handling and storage of gasoline they should properly begin with the fundamental conditions and analyze its physical properties, they can then determine from what combinations and under what conditions the various degrees of hazard will be reached.

Gasoline is obtained by fractional distillation from crude petroleum. The crude petroleum is slowly heated and at the temperature of 140 to 158° Fahrenheit gasoline is obtained. Its specific gravity is .636 to .657 and it constitutes 1.5 per cent of the volume of crude petroleum.

Gasoline has practically no flashing point, that is, if placed in an open vessel it will vaporize under almost any ordinary temperature, in fact below freezing point. It is three and one-half times as heavy as air, and from this fact lies one of the greatest inherent hazards, for while, for instance, city gas is lighter than air, and, escaping, rises and is gradually carried off, gasoline vapors fall to the floor and collect and stand in cellars, openings in the floor, etc., where it remains ready to flash from contact with the first open flame.

In the liquid state gasoline is innocuous, that is so long as it remains absolutely a liquid it can neither ignite, burn nor explode. Again, a pure gasoline vapor will neither ignite nor burn. It must not only be brought into contact and mixed with air, but must be mixed with such quantities of air as will support combustion. It is for this reason that a carbureter forms so important a part of gasoline lighting, heating and power systems; the function of the carbureter is to mix the pure vapor of gasoline with a sufficient quantity of air to make it combustible or explosive according to the purpose for which it is to be used. Gasoline reaches its highest point of explosive violence when vapor mixture stands about eight parts of air to one part of gasoline vapor and falls off in combustibility with the relative increase of either gasoline or air.

Another property of gasoline which must be borne in mind is that when it evaporates and becomes properly mixed with air it has its definite point of ignition just as has any combustible material. In other words the temperature in a room might reach a very high

degree, yet there would be no explosion of the gasoline vapor, whereas an open flame, a lighted cigar or cigarette, or electric spark would ignite it instantly.

Although gunpowder and dynamite are considered very dangerous, gasoline is even more dangerous, for while the former will remain where placed, the latter vaporizing from a vessel in a room will creep along the floor until it comes in contact with a flame one hundred or more feet away from the vessel. It will then flash back to the latter through this strata of gas, causing a resultant explosion or fire at that point.

Gasoline or naphtha should be stored under ground in a well and thoroughly made steel tank designed for this purpose. The tank should be so constructed as to prevent evaporation and should be placed below the pump, so that all pipe lines would slope to the tank from the pump. The flanges and all openings should be at the top of the tank and under no conditions should there be any openings on the side or bottom, for if the pipe line leading from the bottom of the tank be ruptured by either accident or fire the gasoline would be poured into the building either by siphonic action or gravity, a condition which could not be overcome. The thickness of the material used in the manufacture of the tank should depend on the quantity to be stored. A plan which is followed in many cases suggests a tank of 12 gauge material for quantities up to and including 500 gallons, and 3-16" material for tanks of larger capacity.

The automobilist will find many advantages in the underground storage systems, as shown in Figure 1. The gasoline is maintained at an even temperature and, therefore, retains its original quality. The tendency for evaporation is absolutely eliminated by proper venting, and, therefore, there is no loss from this source. Along with these features every automobilist will appreciate the economy and convenience of always having on hand an adequate supply of gasoline. He will, therefore, not find himself embarrassed without this very essential fluid which may cause delay and expense in renewing the supply.

The tank should be placed two feet below the surface of the ground. It is not necessary to install a gasoline underground storage tank in either a vault or pit, as such installation does not lengthen the life of the tank, and it has been found by actual experience that the sinking of the tank in the ground is absolutely safe. Should the ground be exceptionally moist, so that the tank would be in water, a vault would overcome this obstacle. In all cases, however, where it is necessary to install a gasoline under-

## GARAGES—COUNTRY AND SUBURBAN

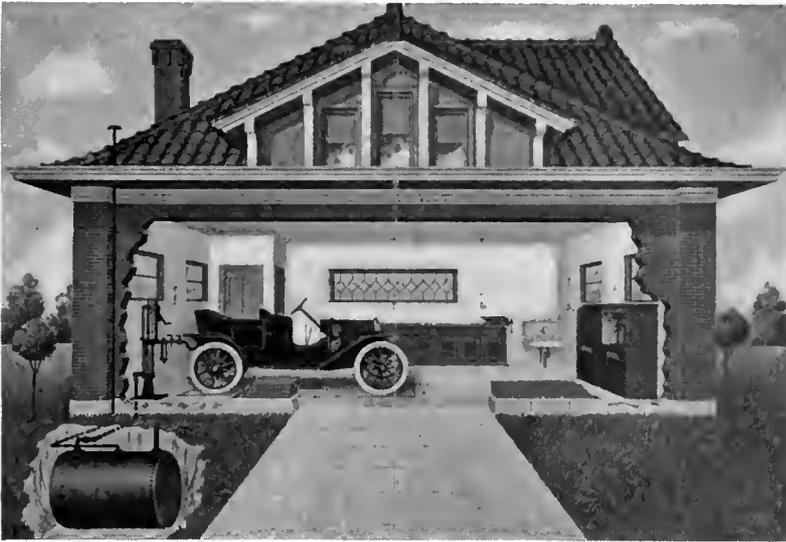


Fig. 1.

ground storage tank in a vault or pit the pit should be filled in with sand around the tank.

The vent pipe from the tank should extend two feet higher than the building so that any gases that may be expelled from the tank during filling will be carried off without possibility of contact with the flame. This vent should be protected by a fine mesh wire gauze. The fill pipe should also be protected by a fine wire gauze.

There are several methods of drawing gasolene from a tank, but that which is most commonly in use and which is apparently the most successful and absolutely safe is by means of an approved pump which draws the gasolene by force from the tank and no discharge of gasolene can be had without placing the pump into operation. This eliminates any possibility of discharging gasolene should accident occur to the pipe line, in case of fire. The suction pipe should at no point be lower than the top of the tank and care should be exercised in the making up of all joints and connections of the pipe line that they be absolutely tight. This can best be done by use of a cement which is insoluble in gasolene. Gasolene or other volatile or inflammable liquids should never be handled by pressure systems controlled either by water or air. It is obvious inasmuch as the pressure remains constantly on the system that in the case of an accident or fire, should the pipe line be ruptured, the gasolene would be automatically discharged and cause a situation which would be difficult to handle. The proper method of overcoming such a difficulty as this is to install

a pump approved and accepted by insurance underwriters, which draws the gasolene, by work applied to the pump, and then there can be no disturbance of the liquid in the storage tank without the direct application of the pump. By the installation of a pump of this nature, should a fire occur and the pipe line be ruptured, no resultant difficulties will be encountered inasmuch as automatic check valves are placed in the suction line which make it impossible for the blaze to reach the storage tank.

There never has been a fire started from such underground storage systems as described above, and in no case has a fire been increased on account of such a system. In fact there is no case on record where the gasolene in one of these systems has been affected by fire, or caused any trouble whatsoever during the fire. This proves conclusively that the danger is not from the storage of gasolene when properly provided for. The handling of gasolene should be expedited in every possible way and so arranged that the gasolene is not exposed to the air. This is usually overcome by drawing the gasolene directly from the underground storage tank through the pump, thence to the reservoir of the automobile by specially prepared gasolene hose, which absolutely eliminates any possibility of gasolene vapors flowing into the garage.

As an illustration of how an underground gasolene system will withstand the action of flames, we



Fig. 2.

## GARAGES—COUNTRY AND SUBURBAN

reproduce in Figure 2 a photograph showing the interior of a private garage at Brookline, Massachusetts, which was destroyed by fire March 26, 1909. In this particular instance the installation was a one-gallon self-measuring gasolene pump connected to a 10-bbl. underground storage tank, which was located approximately ten feet from the building. Upon examination of the ruins the pump was found to have been badly burned and unfit for further use. There was, however, no trouble experienced from the gallon of gasolene in the cylinder of this pump, the same having been found in good condition after the fire. The gasolene in the tank was in perfect condition and was used shortly after the fire. It goes to prove the adaptability of such an outfit during a raging fire, protecting life and property, the value of which is recognized and appreciated by the fire departments in all cities.

We would call attention to Figure 3, which shows

the building. The gasolene is drawn by an approved pump within the garage, and can be drawn directly to

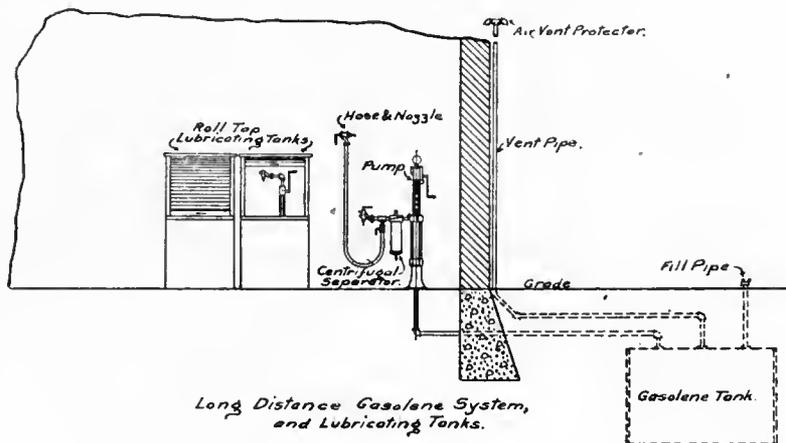


Fig. 3.

the car by use of the hose and nozzle. The venting of the tank is done by a separate vent pipe running up the outside of the building, and terminating in an air vent protector.

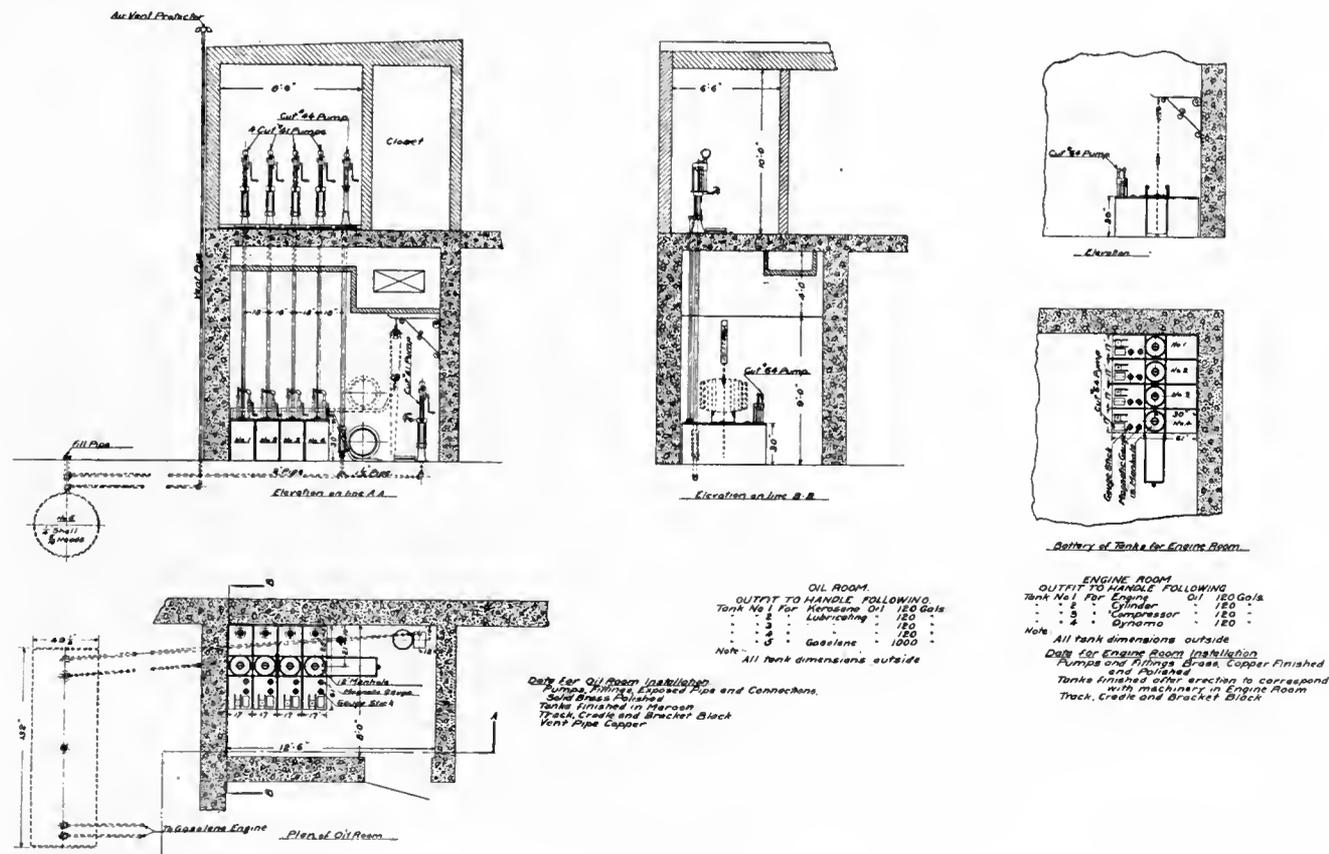


Fig. 4.

what can be accomplished in the way of safe and satisfactory gasolene underground storage for the private garage. The tank is located and filled from without

Another important feature to be considered by the automobile owner is the fact that installation of a standard equipment, such as is described above, meets

## GARAGES—COUNTRY AND SUBURBAN

the approval of the insurance companies, due to its safety features and if an approved system is installed there is rarely any difficulty in obtaining satisfactory rates of insurance. In fact, the regulations of many of the largest Insurance Boards and Rating Companies in the country approve of equipment of the sort outlined. For example, we quote from permit used by the New England Insurance Company, Rules 3 and 4.

“Third: That there shall be no gasoline kept inside such building, its additions or connections, except that contained in said automobile, and not exceeding one gallon in the chamber of a measuring pump.”

“Fourth: That a supply tank shall be at least ten feet from such building, its additions or connections, unless it is buried at least two feet below the level of the basement floor. All pipes for filling or ventilating the supply tank to be outside the building and piping to pump to be so laid as to drain toward the tank.”

For use in conjunction with underground storage for gasoline we recommend for the motorist the use of proper storage equipment for his lubricating oils. This is a feature of garage equipment which we believe is overlooked in a great many cases, and the use of proper lubricants is just as essential for ease of operation and long life of the car as is the use of gasoline to furnish the propelling power.

This subject was handled in a very thorough and capable manner by Prof. W. C. Hosford, of the Boston Y. M. C. A. Automobile School, in a recent lecture. The following embodies to a great extent this lecture.

With the best interest of the automobile owner at heart, probably the most expensive item is repairs. It is safe to say that ninety per cent of the automobilists are ignorant of the fact that almost all of the repairs on an automobile are either due to insufficient or improper lubrication. From carefully prepared statistics and data obtained from repair shops, it has been found that, except in tire trouble and accidents, ninety-five per cent of the repairs can be unquestionably traced to this source. The deteriorating results are torn and mangled cylinders, warped and broken transmissions, differentials, etc., that are a common topic with the repair man. These conditions, together with many others, are due, principally, to poor or insufficient lubrication.

Let us consider the principle and theory of lubrication. Upon examination with a microscope, lubricating oil will present the appearance of minute globules held together by a light fluid. The latter fluid merely acts as an adhesive medium between the globules, which rotate on one another something after the fashion of a ball bearing. Now, when two moving elements, as for instance the shaft and bearing, are brought in contact, no matter how carefully the surfaces are ground and polished, the result is friction and heat.

The amount of friction depends upon the compression and area of contacting surface, assuming that all other conditions are equal; that is, the material of the same quality and the surfaces ground and polished equally. Therefore, to reduce the friction to a minimum, the lubricant must be of such tenacity as to interpose between the moving elements a substance that will separate them from each other at a microscopic distance so that each independently works upon the globules of the oil.

It has been found that, while the surface of a lubricant tends to reduce friction and the surface tension is extremely high, there is also a very large amount of internal friction in oil—that is, an apparent magnetism presents itself in the form of tenacity in the interior of the liquid. This feature is commonly known as viscosity, although it means more than simply a viscous fluid. It is therefore obvious that a lubricant capable of withstanding a pressure of one hundred pounds per square inch would not satisfactorily withstand a pressure of five hundred pounds per square inch and lubricate properly on account of viscosity. For this reason it is very impractical to attempt to use light cylinder oil on a shaft and bearing where a very heavy oil should be used. Likewise, it would be very impractical to attempt to use a very heavy oil to lubricate a cylinder.

With the former thought in mind the automobile engineer has decided that at least four grades of lubricants are required to give an automobile proper and satisfactory lubrication; cylinder oil, gear case oil, light machine oil, and non-fluid oil. Let us first consider cylinder oil. Cylinder oil is used to reduce the friction between the cylinder and the piston as low as possible. On account of the fact that the oil is distributed over the internal surface of the cylinder the oil is present when explosion takes place, which is accompanied by high temperature and flame. Inasmuch as cylinder oil is a distillate of coal oil it contains more or less carbon. When the oil is burned by the heat and flame from the explosion in the cylinder, a deposit of carbon remains on the internal walls of the expansion chamber, cylinder and spark plugs. It offers great hindrance to the last, preventing regular sparking and, together with its adhering to the walls of the cylinder, makes a very noticeable decline in power. It has been the aim of the refiner to reduce the per cent of carbon in the cylinder to a minimum.

In the average car, each cylinder requires from five to ten drops per minute, which is fed by an automatic pump or by gravitation, the dropping being regulated by needle valves which are placed in sightfeed glasses in the dash board. Hence it follows that if the oil is not free from dirt and lint these feed pipes and needle valves will be choked, with the following results: As

## GARAGES—COUNTRY AND SUBURBAN

the operator depends upon the number of drops per minute to determine whether or not his cylinders are receiving proper and sufficient lubrication, if dirt and lint should accumulate in the needle valve, it would of course diminish the number of drops per minute, and the operator assuming that his car is not receiving enough oil would increase the opening until the desired amount is obtained. The jolting of the car would be very apt to clear the feed pipes with the result that the engine would receive too much oil, resulting in excess carbonization in the cylinders. If by chance the operator does not see the diminished flow of oil, it would leave the cylinders without the proper supply and in a short time they would be overheated by friction and probably result in "freezing." If the amount of dirt in the oil is not sufficient to choke the feed pipes it is only a question of a short time before the cylinder and pistons are gouged and torn so that it is impossible to get compression, with the natural result that new cylinders and pistons must be obtained at the average cost of \$100.00 per cylinder. Hence comes the stand made by many automobile engineers:

"It is ultimately as detrimental to feed an engine dirty oil as it is to give no oil at all, as in either case it spells destruction."

The results of gear case and light machine oil are incidental with that of cylinder oil, and it is hardly necessary to go into the minor details. A small bearing or cam in order to work properly has got to be right, and cannot be torn by dirt or have the temper drawn by overheating, for in either case it means rapid wearing of that part.

While the foregoing holds true as regards using clean lubricating oil, it is well to add that the same grade of cylinder oil should always be used. Many automobilists make the mistake of using various grades of cylinder oil in their engines. It is well that the automobilist should store in his garage a quantity of each kind of the several oils he uses in his car. This particularly applies to the use of cylinder oil, as the changing of the grades of cylinder oil in an engine means the loss of power and the shortening of its useful life.

If the automobile owner should know these facts, is it not reasonable to assume that he is willing to save himself hundreds of dollars annually on repair bills by keeping a supply and by properly storing his lubricating oil? By properly storing, we do not mean storing the oils in barrels, but storing them in a scientifically and properly made oil tank where details have been carried out to the end of giving him not only a dirt and dust proof storage, but protecting him from losses, as seepage, leakage and waste, and also to prevent him from endangering himself and property by fire. Although these last points are probably not

as important as the former, it is surprising the amount of money that can be saved in this way.

In Figure 3 are shown two very practical outfits for the storage of lubricating oils. These outfits are of the roll top design, the purpose being to eliminate any and all dust and lint that may circulate through the garage and mix with the oil. They also present an adaptable place for keeping filling cans. These tanks are all metal and can be furnished in any capacity from ten gallons up to several barrels, and are considered fireproof.

Probably the most ideal installation of a private garage equipment in the country is shown in Figure 4. This garage is located in Newton, Mass., and is situated on the side of a hill so that the main entrance is on the second floor. On this floor are installed five long distance self measuring pumps for handling gasoline, three grades of lubricating oil, and kerosene oil. The lubricating and kerosene oil pumps draw the liquid from four 120 gallon tanks located directly below on the first floor. In these tanks are also placed four additional pumps, so that the oil can be drawn from the first floor. In order to facilitate the emptying of the barrels of oil into these tanks a track is placed on top of the tanks on the end of which is a swinging cradle. A barrel of oil is rolled on the cradle and then lifted by a chain hoist until the cradle becomes parallel with the track, when the barrel can then be rolled over the proper tank and emptied.

A gasoline storage tank of 1,000 gallon capacity is located under the ground at the rear of the garage and the suction pipe connects with two long distant self measuring pumps, one on the first floor and one on the second floor. The tank is also connected to the gasoline engine by means of a suction and return pipe. The venting of the tank is done by means of a vent running to the building, thence up the outside and projecting two feet above the eaves.

The five long distant pumps on the second floor and the long distant pump on the first floor are made of solid brass very highly polished, as well as are the fittings, exposed pipe and connections.

All of the long distance pumps are adjusted to measure an accurate gallon, half gallon, quart or pint.

In order to determine the amount of oil in any of the tanks a magnetic gauge has been installed which shows at a glance the exact quantity of oil contained.

In the engine room there have been installed four first floor tanks for handling engine oil, cylinder oil, compressor oil and machine oil. These tanks are 120 gallon capacity each, and pumps and fittings are of solid brass highly polished. The same methods of emptying the oil from the barrels into the tanks by means of the barrel track and swinging cradle are used as in the oil room.





# Plates





Plate 1

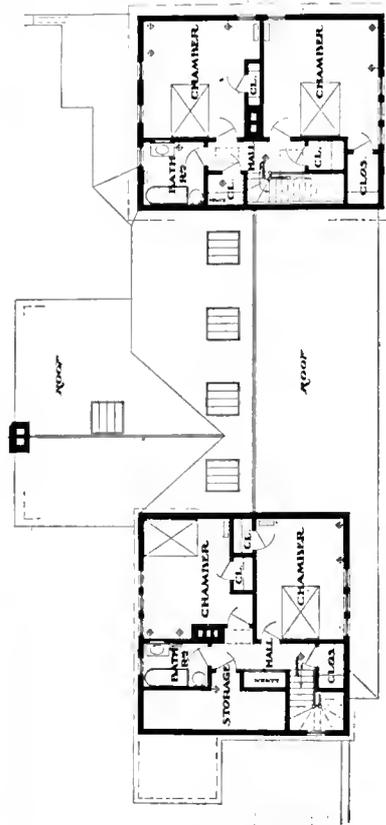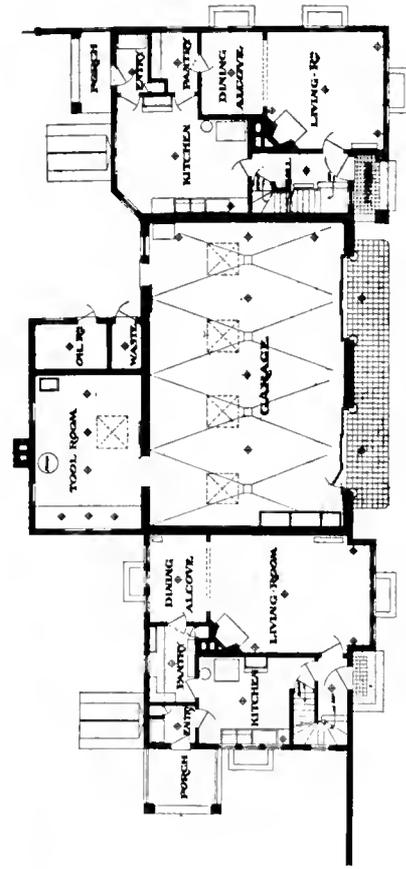

GARAGE AT BRISTOL, R. I.

Kilham & Hopkins, Architects

The buildings comprise a fireproof garage located between a dwelling for the coachman and one for the chauffeur. The walls are of plaster and the roofs of slate to match the mansion house of the estate



GARAGES—COUNTRY AND SUBURBAN




GARAGE AT NEW ROCHELLE, N. Y.  
Oswald C. Hering, Architect

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100




no vni  
anastasia

GARAGE AT BROOKLINE, MASS.  
Putnam & Cox, Architects

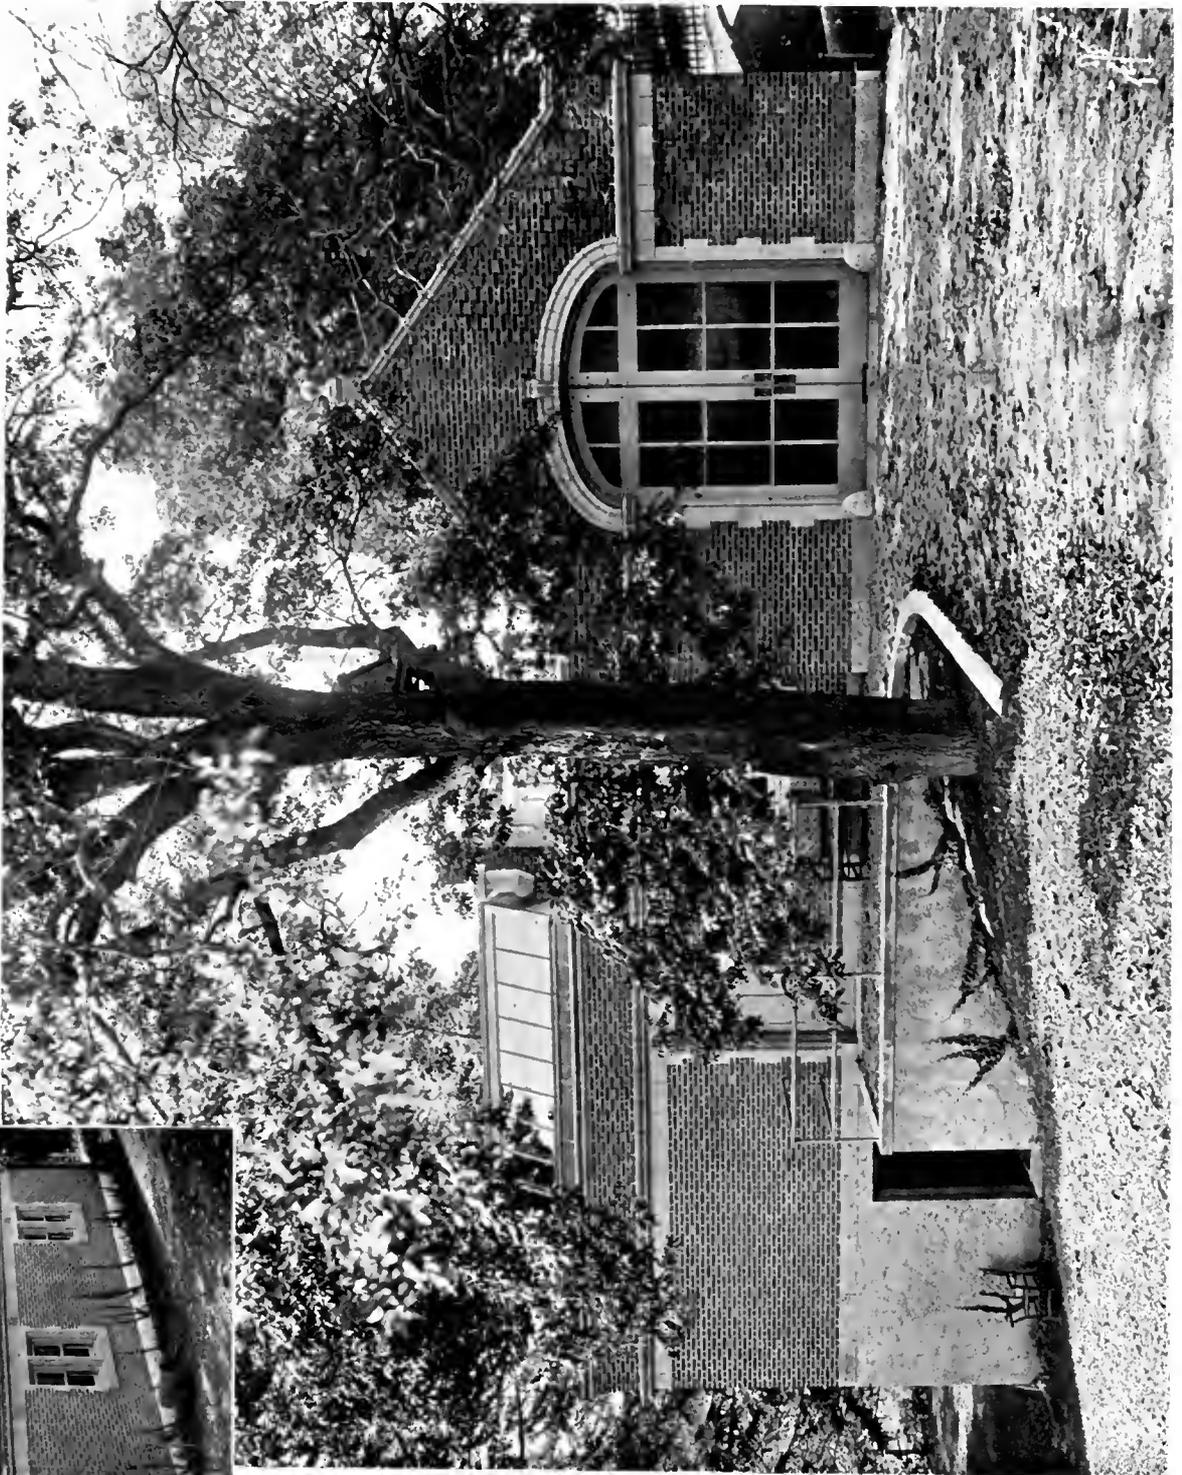



GARAGES—COUNTRY AND SUBURBAN

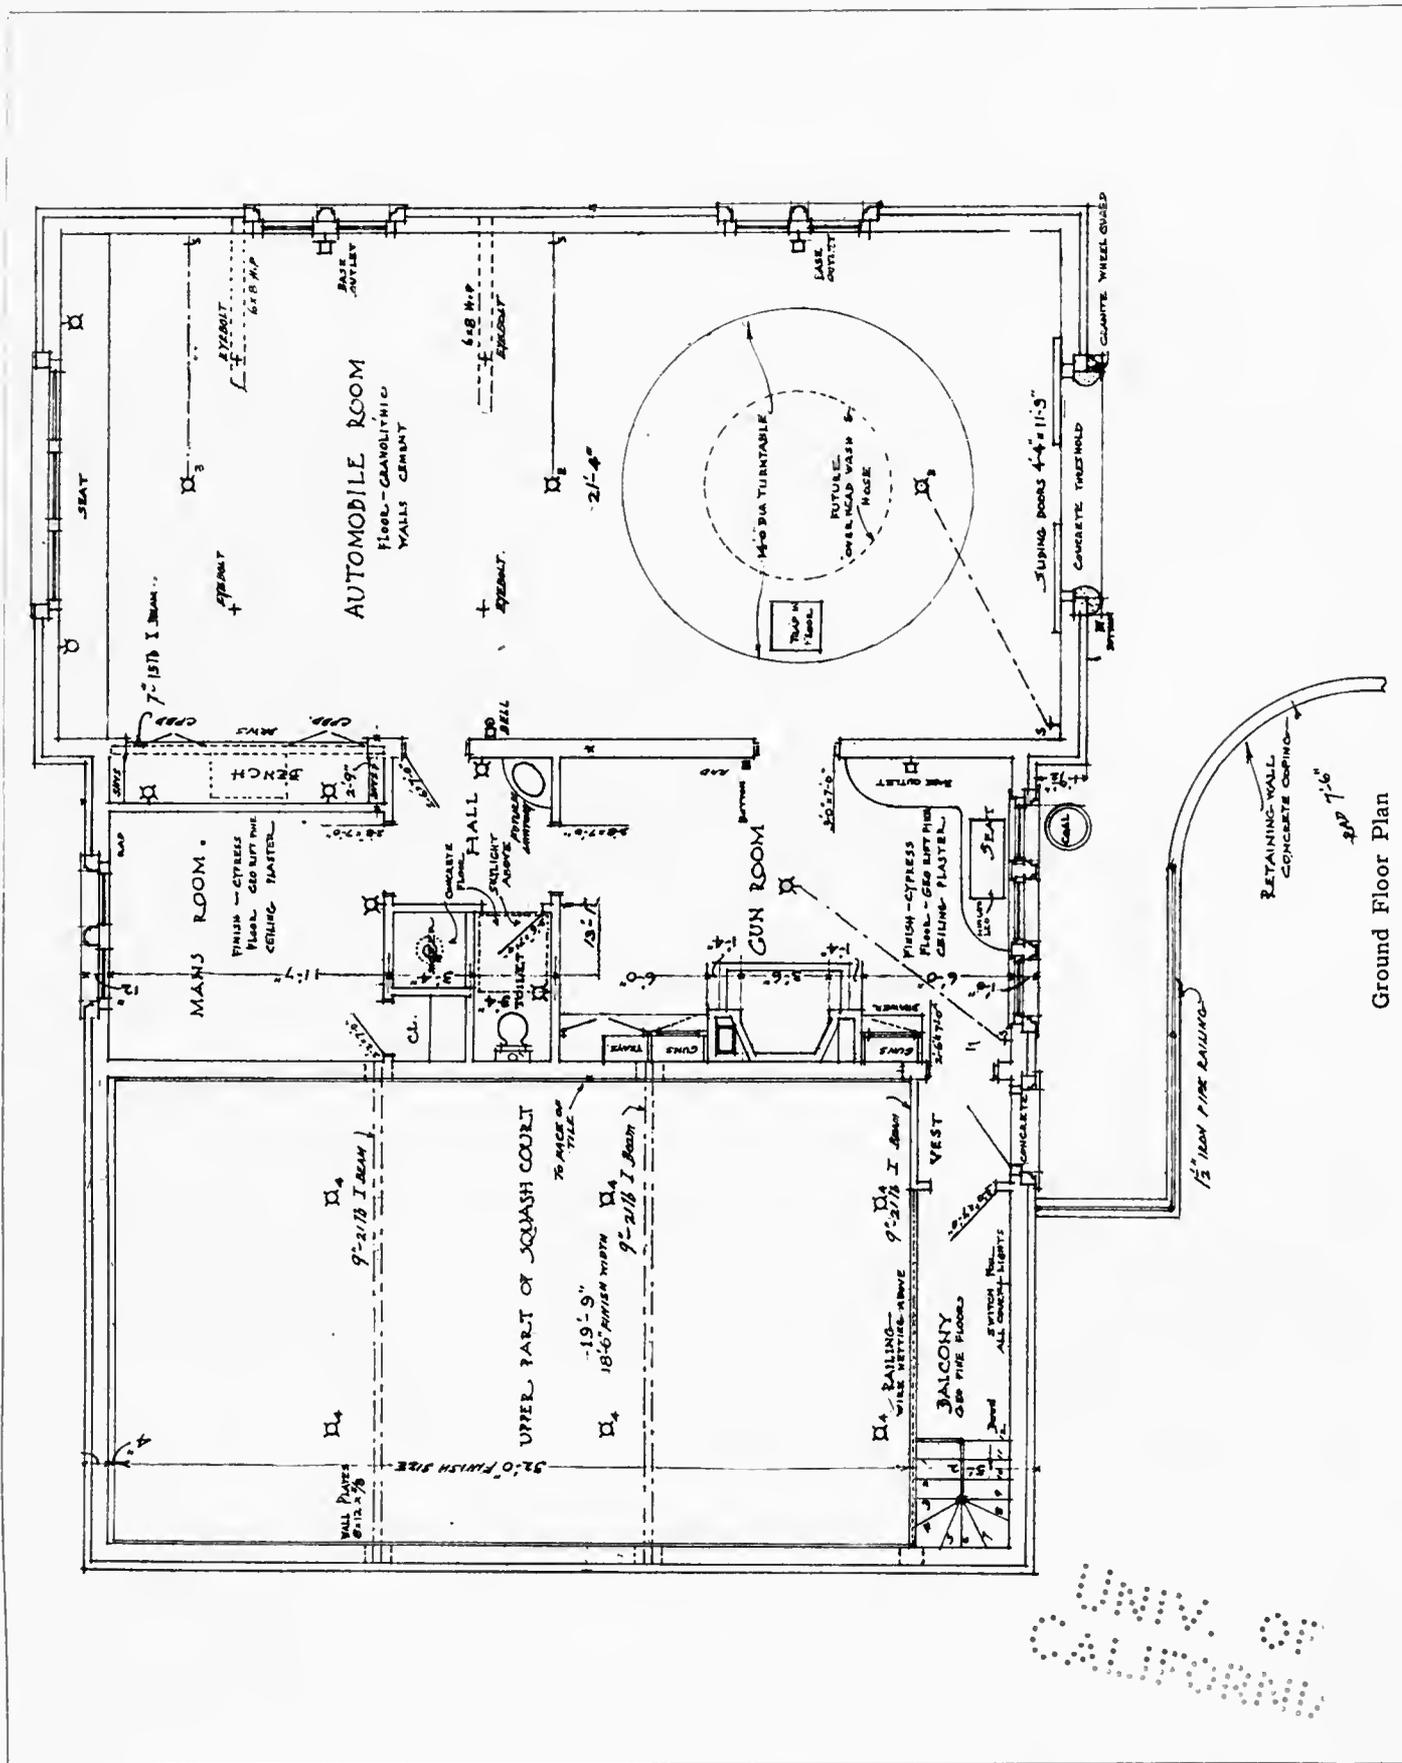

Ground Floor Plan

GARAGE AND SQUASH COURT AT BROOKLINE, MASS.  
Putnam & Cox, Architects






GARAGE AT IPSWICH, MASS.  
Putnam & Cox, Architects

70 1981  
AIRPORT

GARAGES—COUNTRY AND SUBURBAN


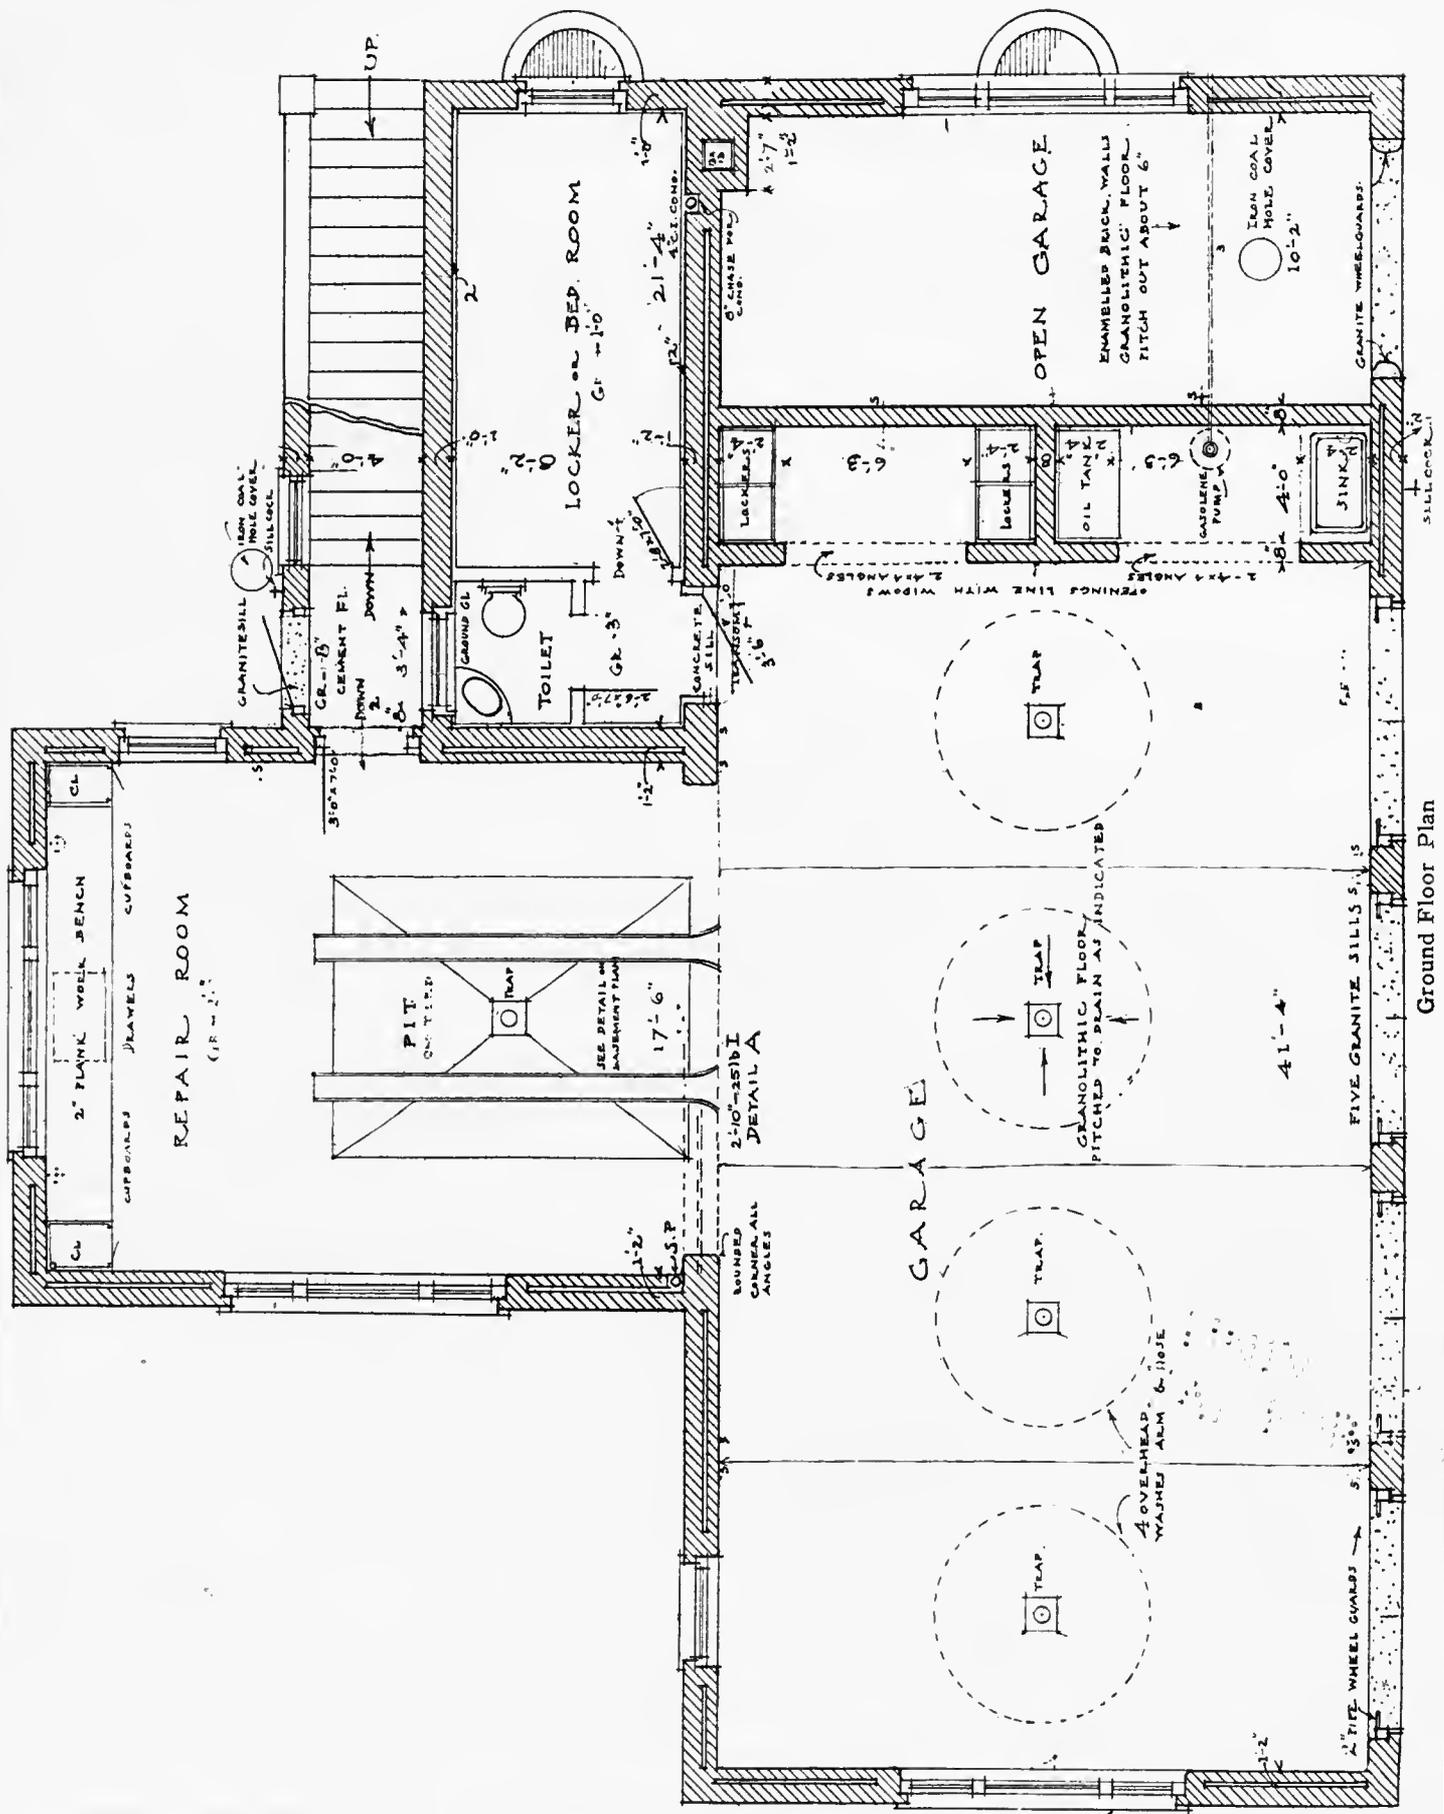


Ground Floor Plan

GARAGE AT IPSWICH, MASS.  
Putnam & Cox, Architects



GARAGES—COUNTRY AND SUBURBAN

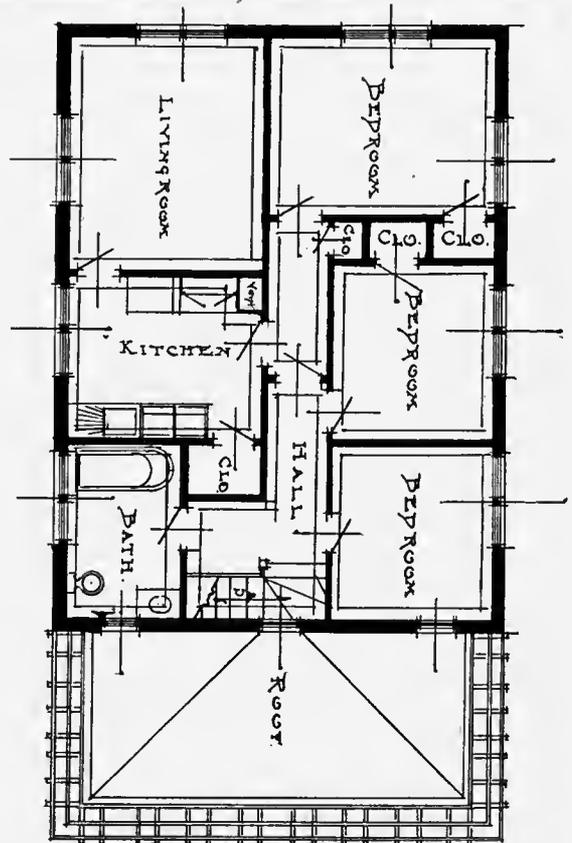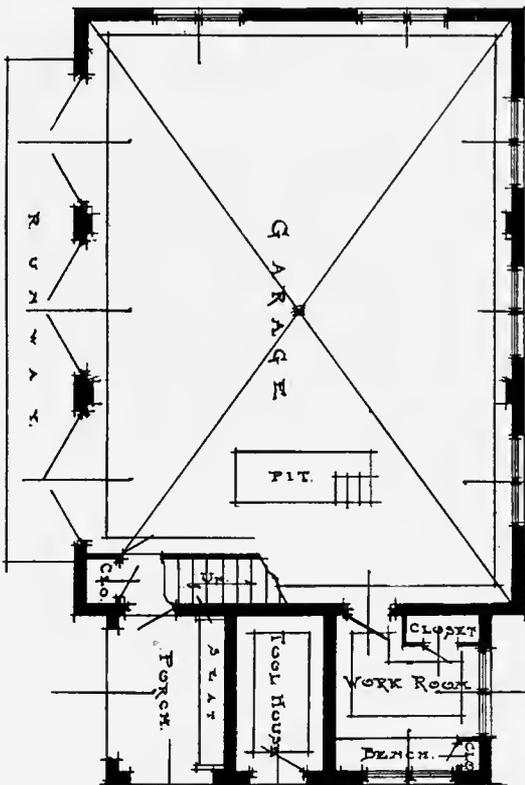

GARAGE AND HANGAR OF MR. A. B. GAINES, ENGLEWOOD, N. J.  
Messrs. Davis, McGrath & Kiessling, Architects

TO VIVI  
ANDERSON



INTERIOR OF A GARAGE AT BROOKLINE, MASS., SHOWING TURNTABLE  
Putnam & Cox, Architects



INTERIOR OF GARAGE AT ENGLEWOOD, N. J., SHOWING WORKBENCH, PIT, OVERHEAD WASHER  
AND TRAVELING HOIST  
Messrs. Davis, McGrath & Kiessling, Architects

70 .VINU  
ANPOTLIAD


GARAGES—COUNTRY AND SUBURBAN



GARAGE AT CARLISLE, PA.  
Oswald C. Hering, Architect

10 2001  
11 2002  
12 2003  
13 2004  
14 2005  
15 2006  
16 2007  
17 2008  
18 2009  
19 2010  
20 2011  
21 2012  
22 2013  
23 2014  
24 2015  
25 2016  
26 2017  
27 2018  
28 2019  
29 2020  
30 2021  
31 2022  
32 2023  
33 2024  
34 2025  
35 2026  
36 2027  
37 2028  
38 2029  
39 2030  
40 2031  
41 2032  
42 2033  
43 2034  
44 2035  
45 2036  
46 2037  
47 2038  
48 2039  
49 2040  
50 2041  
51 2042  
52 2043  
53 2044  
54 2045  
55 2046  
56 2047  
57 2048  
58 2049  
59 2050  
60 2051  
61 2052  
62 2053  
63 2054  
64 2055  
65 2056  
66 2057  
67 2058  
68 2059  
69 2060  
70 2061  
71 2062  
72 2063  
73 2064  
74 2065  
75 2066  
76 2067  
77 2068  
78 2069  
79 2070  
80 2071  
81 2072  
82 2073  
83 2074  
84 2075  
85 2076  
86 2077  
87 2078  
88 2079  
89 2080  
90 2081  
91 2082  
92 2083  
93 2084  
94 2085  
95 2086  
96 2087  
97 2088  
98 2089  
99 2090  
100 2091  
101 2092  
102 2093  
103 2094  
104 2095  
105 2096  
106 2097  
107 2098  
108 2099  
109 2100  
110 2101  
111 2102  
112 2103  
113 2104  
114 2105  
115 2106  
116 2107  
117 2108  
118 2109  
119 2110  
120 2111  
121 2112  
122 2113  
123 2114  
124 2115  
125 2116  
126 2117  
127 2118  
128 2119  
129 2120  
130 2121  
131 2122  
132 2123  
133 2124  
134 2125  
135 2126  
136 2127  
137 2128  
138 2129  
139 2130  
140 2131  
141 2132  
142 2133  
143 2134  
144 2135  
145 2136  
146 2137  
147 2138  
148 2139  
149 2140  
150 2141  
151 2142  
152 2143  
153 2144  
154 2145  
155 2146  
156 2147  
157 2148  
158 2149  
159 2150  
160 2151  
161 2152  
162 2153  
163 2154  
164 2155  
165 2156  
166 2157  
167 2158  
168 2159  
169 2160  
170 2161  
171 2162  
172 2163  
173 2164  
174 2165  
175 2166  
176 2167  
177 2168  
178 2169  
179 2170  
180 2171  
181 2172  
182 2173  
183 2174  
184 2175  
185 2176  
186 2177  
187 2178  
188 2179  
189 2180  
190 2181  
191 2182  
192 2183  
193 2184  
194 2185  
195 2186  
196 2187  
197 2188  
198 2189  
199 2190  
200 2191  
201 2192  
202 2193  
203 2194  
204 2195  
205 2196  
206 2197  
207 2198  
208 2199  
209 2200  
210 2201  
211 2202  
212 2203  
213 2204  
214 2205  
215 2206  
216 2207  
217 2208  
218 2209  
219 2210  
220 2211  
221 2212  
222 2213  
223 2214  
224 2215  
225 2216  
226 2217  
227 2218  
228 2219  
229 2220  
230 2221  
231 2222  
232 2223  
233 2224  
234 2225  
235 2226  
236 2227  
237 2228  
238 2229  
239 2230  
240 2231  
241 2232  
242 2233  
243 2234  
244 2235  
245 2236  
246 2237  
247 2238  
248 2239  
249 2240  
250 2241  
251 2242  
252 2243  
253 2244  
254 2245  
255 2246  
256 2247  
257 2248  
258 2249  
259 2250  
260 2251  
261 2252  
262 2253  
263 2254  
264 2255  
265 2256  
266 2257  
267 2258  
268 2259  
269 2260  
270 2261  
271 2262  
272 2263  
273 2264  
274 2265  
275 2266  
276 2267  
277 2268  
278 2269  
279 2270  
280 2271  
281 2272  
282 2273  
283 2274  
284 2275  
285 2276  
286 2277  
287 2278  
288 2279  
289 2280  
290 2281  
291 2282  
292 2283  
293 2284  
294 2285  
295 2286  
296 2287  
297 2288  
298 2289  
299 2290  
300 2291  
301 2292  
302 2293  
303 2294  
304 2295  
305 2296  
306 2297  
307 2298  
308 2299  
309 2300  
310 2301  
311 2302  
312 2303  
313 2304  
314 2305  
315 2306  
316 2307  
317 2308  
318 2309  
319 2310  
320 2311  
321 2312  
322 2313  
323 2314  
324 2315  
325 2316  
326 2317  
327 2318  
328 2319  
329 2320  
330 2321  
331 2322  
332 2323  
333 2324  
334 2325  
335 2326  
336 2327  
337 2328  
338 2329  
339 2330  
340 2331  
341 2332  
342 2333  
343 2334  
344 2335  
345 2336  
346 2337  
347 2338  
348 2339  
349 2340  
350 2341  
351 2342  
352 2343  
353 2344  
354 2345  
355 2346  
356 2347  
357 2348  
358 2349  
359 2350  
360 2351  
361 2352  
362 2353  
363 2354  
364 2355  
365 2356  
366 2357  
367 2358  
368 2359  
369 2360  
370 2361  
371 2362  
372 2363  
373 2364  
374 2365  
375 2366  
376 2367  
377 2368  
378 2369  
379 2370  
380 2371  
381 2372  
382 2373  
383 2374  
384 2375  
385 2376  
386 2377  
387 2378  
388 2379  
389 2380  
390 2381  
391 2382  
392 2383  
393 2384  
394 2385  
395 2386  
396 2387  
397 2388  
398 2389  
399 2390  
400 2391  
401 2392  
402 2393  
403 2394  
404 2395  
405 2396  
406 2397  
407 2398  
408 2399  
409 2400  
410 2401  
411 2402  
412 2403  
413 2404  
414 2405  
415 2406  
416 2407  
417 2408  
418 2409  
419 2410  
420 2411  
421 2412  
422 2413  
423 2414  
424 2415  
425 2416  
426 2417  
427 2418  
428 2419  
429 2420  
430 2421  
431 2422  
432 2423  
433 2424  
434 2425  
435 2426  
436 2427  
437 2428  
438 2429  
439 2430  
440 2431  
441 2432  
442 2433  
443 2434  
444 2435  
445 2436  
446 2437  
447 2438  
448 2439  
449 2440  
450 2441  
451 2442  
452 2443  
453 2444  
454 2445  
455 2446  
456 2447  
457 2448  
458 2449  
459 2450  
460 2451  
461 2452  
462 2453  
463 2454  
464 2455  
465 2456  
466 2457  
467 2458  
468 2459  
469 2460  
470 2461  
471 2462  
472 2463  
473 2464  
474 2465  
475 2466  
476 2467  
477 2468  
478 2469  
479 2470  
480 2471  
481 2472  
482 2473  
483 2474  
484 2475  
485 2476  
486 2477  
487 2478  
488 2479  
489 2480  
490 2481  
491 2482  
492 2483  
493 2484  
494 2485  
495 2486  
496 2487  
497 2488  
498 2489  
499 2490  
500 2491  
501 2492  
502 2493  
503 2494  
504 2495  
505 2496  
506 2497  
507 2498  
508 2499  
509 2500  
510 2501  
511 2502  
512 2503  
513 2504  
514 2505  
515 2506  
516 2507  
517 2508  
518 2509  
519 2510  
520 2511  
521 2512  
522 2513  
523 2514  
524 2515  
525 2516  
526 2517  
527 2518  
528 2519  
529 2520  
530 2521  
531 2522  
532 2523  
533 2524  
534 2525  
535 2526  
536 2527  
537 2528  
538 2529  
539 2530  
540 2531  
541 2532  
542 2533  
543 2534  
544 2535  
545 2536  
546 2537  
547 2538  
548 2539  
549 2540  
550 2541  
551 2542  
552 2543  
553 2544  
554 2545  
555 2546  
556 2547  
557 2548  
558 2549  
559 2550  
560 2551  
561 2552  
562 2553  
563 2554  
564 2555  
565 2556  
566 2557  
567 2558  
568 2559  
569 2560  
570 2561  
571 2562  
572 2563  
573 2564  
574 2565  
575 2566  
576 2567  
577 2568  
578 2569  
579 2570  
580 2571  
581 2572  
582 2573  
583 2574  
584 2575  
585 2576  
586 2577  
587 2578  
588 2579  
589 2580  
590 2581  
591 2582  
592 2583  
593 2584  
594 2585  
595 2586  
596 2587  
597 2588  
598 2589  
599 2590  
600 2591  
601 2592  
602 2593  
603 2594  
604 2595  
605 2596  
606 2597  
607 2598  
608 2599  
609 2600  
610 2601  
611 2602  
612 2603  
613 2604  
614 2605  
615 2606  
616 2607  
617 2608  
618 2609  
619 2610  
620 2611  
621 2612  
622 2613  
623 2614  
624 2615  
625 2616  
626 2617  
627 2618  
628 2619  
629 2620  
630 2621  
631 2622  
632 2623  
633 2624  
634 2625  
635 2626  
636 2627  
637 2628  
638 2629  
639 2630  
640 2631  
641 2632  
642 2633  
643 2634  
644 2635  
645 2636  
646 2637  
647 2638  
648 2639  
649 2640  
650 2641  
651 2642  
652 2643  
653 2644  
654 2645  
655 2646  
656 2647  
657 2648  
658 2649  
659 2650  
660 2651  
661 2652  
662 2653  
663 2654  
664 2655  
665 2656  
666 2657  
667 2658  
668 2659  
669 2660  
670 2661  
671 2662  
672 2663  
673 2664  
674 2665  
675 2666  
676 2667  
677 2668  
678 2669  
679 2670  
680 2671  
681 2672  
682 2673  
683 2674  
684 2675  
685 2676  
686 2677  
687 2678  
688 2679  
689 2680  
690 2681  
691 2682  
692 2683  
693 2684  
694 2685  
695 2686  
696 2687  
697 2688  
698 2689  
699 2690  
700 2691  
701 2692  
702 2693  
703 2694  
704 2695  
705 2696  
706 2697  
707 2698  
708 2699  
709 2700  
710 2701  
711 2702  
712 2703  
713 2704  
714 2705  
715 2706  
716 2707  
717 2708  
718 2709  
719 2710  
720 2711  
721 2712  
722 2713  
723 2714  
724 2715  
725 2716  
726 2717  
727 2718  
728 2719  
729 2720  
730 2721  
731 2722  
732 2723  
733 2724  
734 2725  
735 2726  
736 2727  
737 2728  
738 2729  
739 2730  
740 2731  
741 2732  
742 2733  
743 2734  
744 2735  
745 2736  
746 2737  
747 2738  
748 2739  
749 2740  
750 2741  
751 2742  
752 2743  
753 2744  
754 2745  
755 2746  
756 2747  
757 2748  
758 2749  
759 2750  
760 2751  
761 2752  
762 2753  
763 2754  
764 2755  
765 2756  
766 2757  
767 2758  
768 2759  
769 2760  
770 2761  
771 2762  
772 2763  
773 2764  
774 2765  
775 2766  
776 2767  
777 2768  
778 2769  
779 2770  
780 2771  
781 2772  
782 2773  
783 2774  
784 2775  
785 2776  
786 2777  
787 2778  
788 2779  
789 2780  
790 2781  
791 2782  
792 2783  
793 2784  
794 2785  
795 2786  
796 2787  
797 2788  
798 2789  
799 2790  
800 2791  
801 2792  
802 2793  
803 2794  
804 2795  
805 2796  
806 2797  
807 2798  
808 2799  
809 2800  
810 2801  
811 2802  
812 2803  
813 2804  
814 2805  
815 2806  
816 2807  
817 2808  
818 2809  
819 2810  
820 2811  
821 2812  
822 2813  
823 2814  
824 2815  
825 2816  
826 2817  
827 2818  
828 2819  
829 2820  
830 2821  
831 2822  
832 2823  
833 2824  
834 2825  
835 2826  
836 2827  
837 2828  
838 2829  
839 2830  
840 2831  
841 2832  
842 2833  
843 2834  
844 2835  
845 2836  
846 2837  
847 2838  
848 2839  
849 2840  
850 2841  
851 2842  
852 2843  
853 2844  
854 2845  
855 2846  
856 2847  
857 2848  
858 2849  
859 2850  
860 2851  
861 2852  
862 2853  
863 2854  
864 2855  
865 2856  
866 2857  
867 2858  
868 2859  
869 2860  
870 2861  
871 2862  
872 2863  
873 2864  
874 2865  
875 2866  
876 2867  
877 2868  
878 2869  
879 2870  
880 2871  
881 2872  
882 2873  
883 2874  
884 2875  
885 2876  
886 2877  
887 2878  
888 2879  
889 2880  
890 2881  
891 2882  
892 2883  
893 2884  
894 2885  
895 2886  
896 2887  
897 2888  
898 2889  
899 2890  
900 2891  
901 2892  
902 2893  
903 2894  
904 2895  
905 2896  
906 2897  
907 2898  
908 2899  
909 2900  
910 2901  
911 2902  
912 2903  
913 2904  
914 2905  
915 2906  
916 2907  
917 2908  
918 2909  
919 2910  
920 2911  
921 2912  
922 2913  
923 2914  
924 2915  
925 2916  
926 2917  
927 2918  
928 2919  
929 2920  
930 2921  
931 2922  
932 2923  
933 2924  
934 2925  
935 2926  
936 2927  
937 2928  
938 2929  
939 2930  
940 2931  
941 2932  
942 2933  
943 2934  
944 2935  
945 2936  
946 2937  
947 2938  
948 2939  
949 2940  
950 2941  
951 2942  
952 2943  
953 2944  
954 2945  
955 2946  
956 2947  
957 2948  
958 2949  
959 2950  
960 2951  
961 2952  
962 2953  
963 2954  
964 2955  
965 2956  
966 2957  
967 2958  
968 2959  
969 2960  
970 2961  
971 2962  
972 2963  
973 2964  
974 2965  
975 2966  
976 2967  
977 2968  
978 2969  
979 2970  
980 2971  
981 2972  
982 2973  
983 2974  
984 2975  
985 2976  
986 2977  
987 2978  
988 2979  
989 2980  
990 2981  
991 2982  
992 2983  
993 2984  
994 2985  
995 2986  
996 2987  
997 2988  
998 2989  
999 2990  
1000 2991  
1001 2992  
1002 2993  
1003 2994  
1004 2995  
1005 2996  
1006 2997  
1007 2998  
1008 2999  
1009 3000  
1010 3001  
1011 3002  
1012 3003  
1013 3004  
1014 3005  
1015 3006  
1016 3007  
1017 3008  
1018 3009  
1019 3010  
1020 3011  
1021 3012  
1022 3013  
1023 3014  
1024 3015  
1025 3016  
1026 3017  
1027 3018  
1028 3019  
1029 3020  
1030 3021  
1031 3022  
1032 3023  
1033 3024  
1034 3025  
1035 3026  
1036 3027  
1037 3028  
1038 3029  
1039 3030  
1040 3031  
1041 3032  
1042 3033  
1043 3034  
1044 3035  
1045 3036  
1046 3037  
1047 3038  
1048 3039  
1049 3040  
1050 3041  
1051 3042  
1052 3043  
1053 3044  
1054 3045  
1055 3046  
1056 3047  
1057 3048  
1058 3049  
1059 3050  
1060 3051  
1061 3052  
1062 3053  
1063 3054  
1064 3055  
1065 3056  
1066 3057  
1067 3058  
1068 3059  
1069 3060  
1070 3061  
1071 3062  
1072 3063  
1073 3064  
1074 3065  
1075 3066  
1076 3067  
1077 3068  
1078 3069  
1079 3070  
1080 3071  
1081 3072  
1082 3073  
1083 3074  
1084 3075  
1085 3076  
1086 3077  
1087 3078  
1088 3079  
1089 3080  
1090 3081  
1091 3082  
1092 3083  
1093 3084  
1094 3085  
1095 3086  
1096 3087  
1097 3088  
1098 3089  
1099 3090  
1100 3091  
1101 3092  
1102 3093  
1103 3094  
1104 3095  
1105 3096  
1106 3097  
1107 3098  
1108 3099  
1109 3100  
1110 3101  
1111 3102  
1112 3103  
1113 3104  
1114 3105  
1115 3106  
1116 3107  
1117 3108  
1118 3109  
1119 3110  
1120 3111  
1121 3112  
1122 3113  
1123 3114  
1124 3115  
1125 3116  
1126 3117  
1127 3118  
1128 3119  
1129 3120  
1130 3121  
1131 3122  
1132 3123  
1133 3124  
1134 3125  
1135 3126  
1136 3127  
1137 3128  
1138 3129  
1139 3130  
1140 3131  
1141 3132  
1142 3133  
1143 3134  
1144 3135  
1145 3136  
1146 3137  
1147 3138  
1148 3139  
1149 3140  
1150 3141  
1151 3142  
1152 3143  
1153 3144  
1154 3145  
1155 3146  
1156 3147  
1157 3148  
1158 3149  
1159 3150  
1160 3151  
1161 3152  
1162 3153  
1163 3154  
1164 3155  
1165 3156  
1166 3157  
1167 3158  
1168 3159  
1169 3160  
1170 3161  
1171 3162  
1172 3163  
1173 3164  
1174 3165  
1175 3166  
1176 3167  
1177 3168  
1178 3169  
1179 3170  
1180 3171  
1181 3172  
1182 3173  
1183 3174  
1184 3175  
1185 3176  
1186 3177  
1187 3178  
1188 3179  
1189 3180  
1190 3181  
1191 3182  
1192 3183  
1193 3184  
1194 3185  
1195 3186  
1196 3187  
1197 3188  
1198 3189  
1199 3190  
1200 3191  
1201 3192  
1202 3193  
1203 3194  
1204 3195  
1205 3196  
1206 3197  
1207 3198  
1208 3199  
1209 3200  
1210 3201  
1211 3202  
1212 3203  
1213 3204  
1214 3205  
1215 3206  
1216 3207  
1217 3208  
1218 3209  
1219 3210  
1220 3211  
1221 3212  
1222 3213  
1223 3214  
1224 3215  
1225 3216  
1226 3217  
1227 3218  
1228 3219  
1229 3220  
1230 3221  
1

GARAGES—COUNTRY AND SUBURBAN

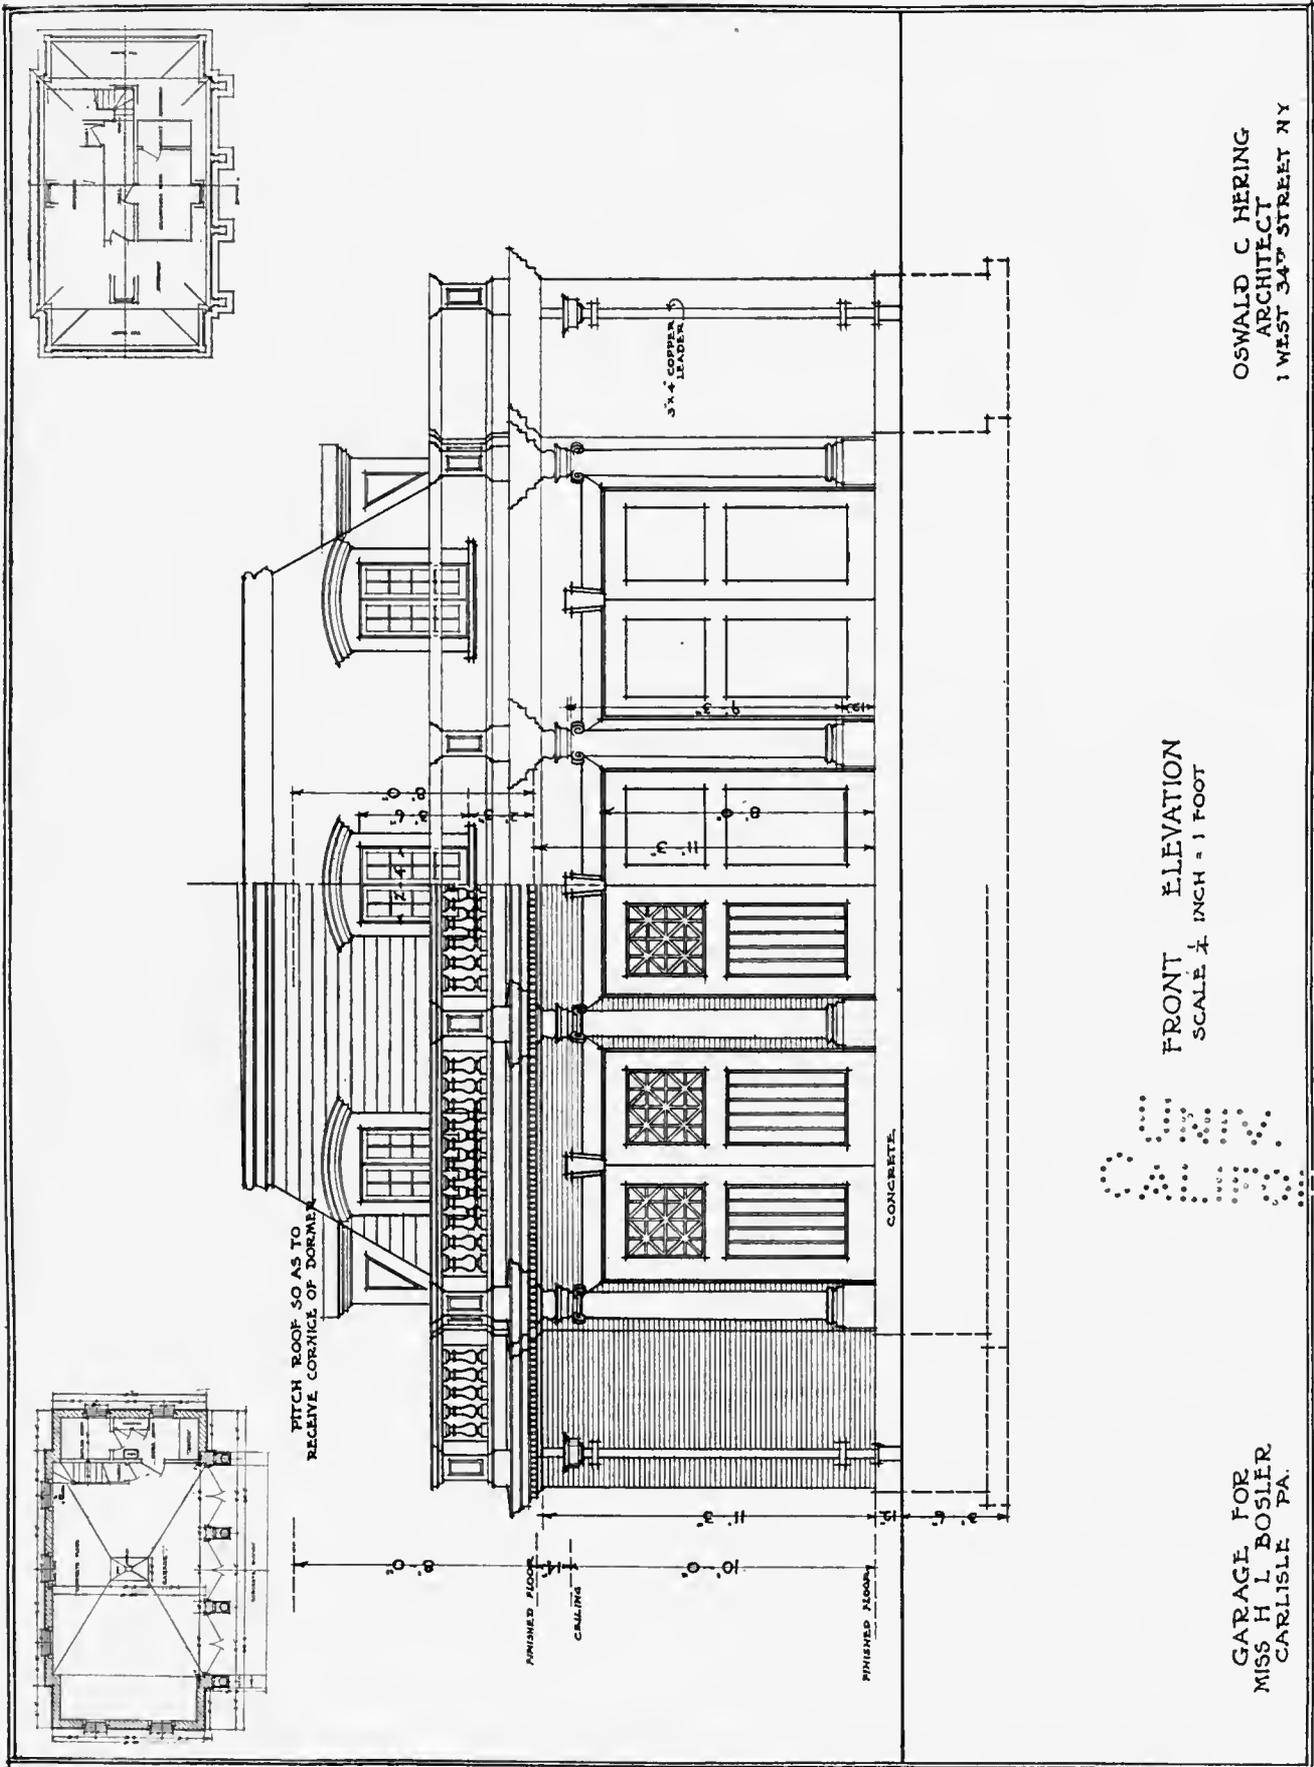

OSWALD C HERING  
ARCHITECT  
1 WEST 34<sup>TH</sup> STREET N.Y.

FRONT ELEVATION  
SCALE 1/4" INCH = 1 FOOT

OSW

GARAGE FOR  
MISS H L BOSLER  
CARLISLE PA.

NO VMD  
ANNOUNCED




GARAGE AT TOPSFIELD, MASS.  
Putnam & Cox, Architects



GARAGE AT NEWTON, MASS.  
Putnam & Cox, Architects



GARAGES—COUNTRY AND SUBURBAN

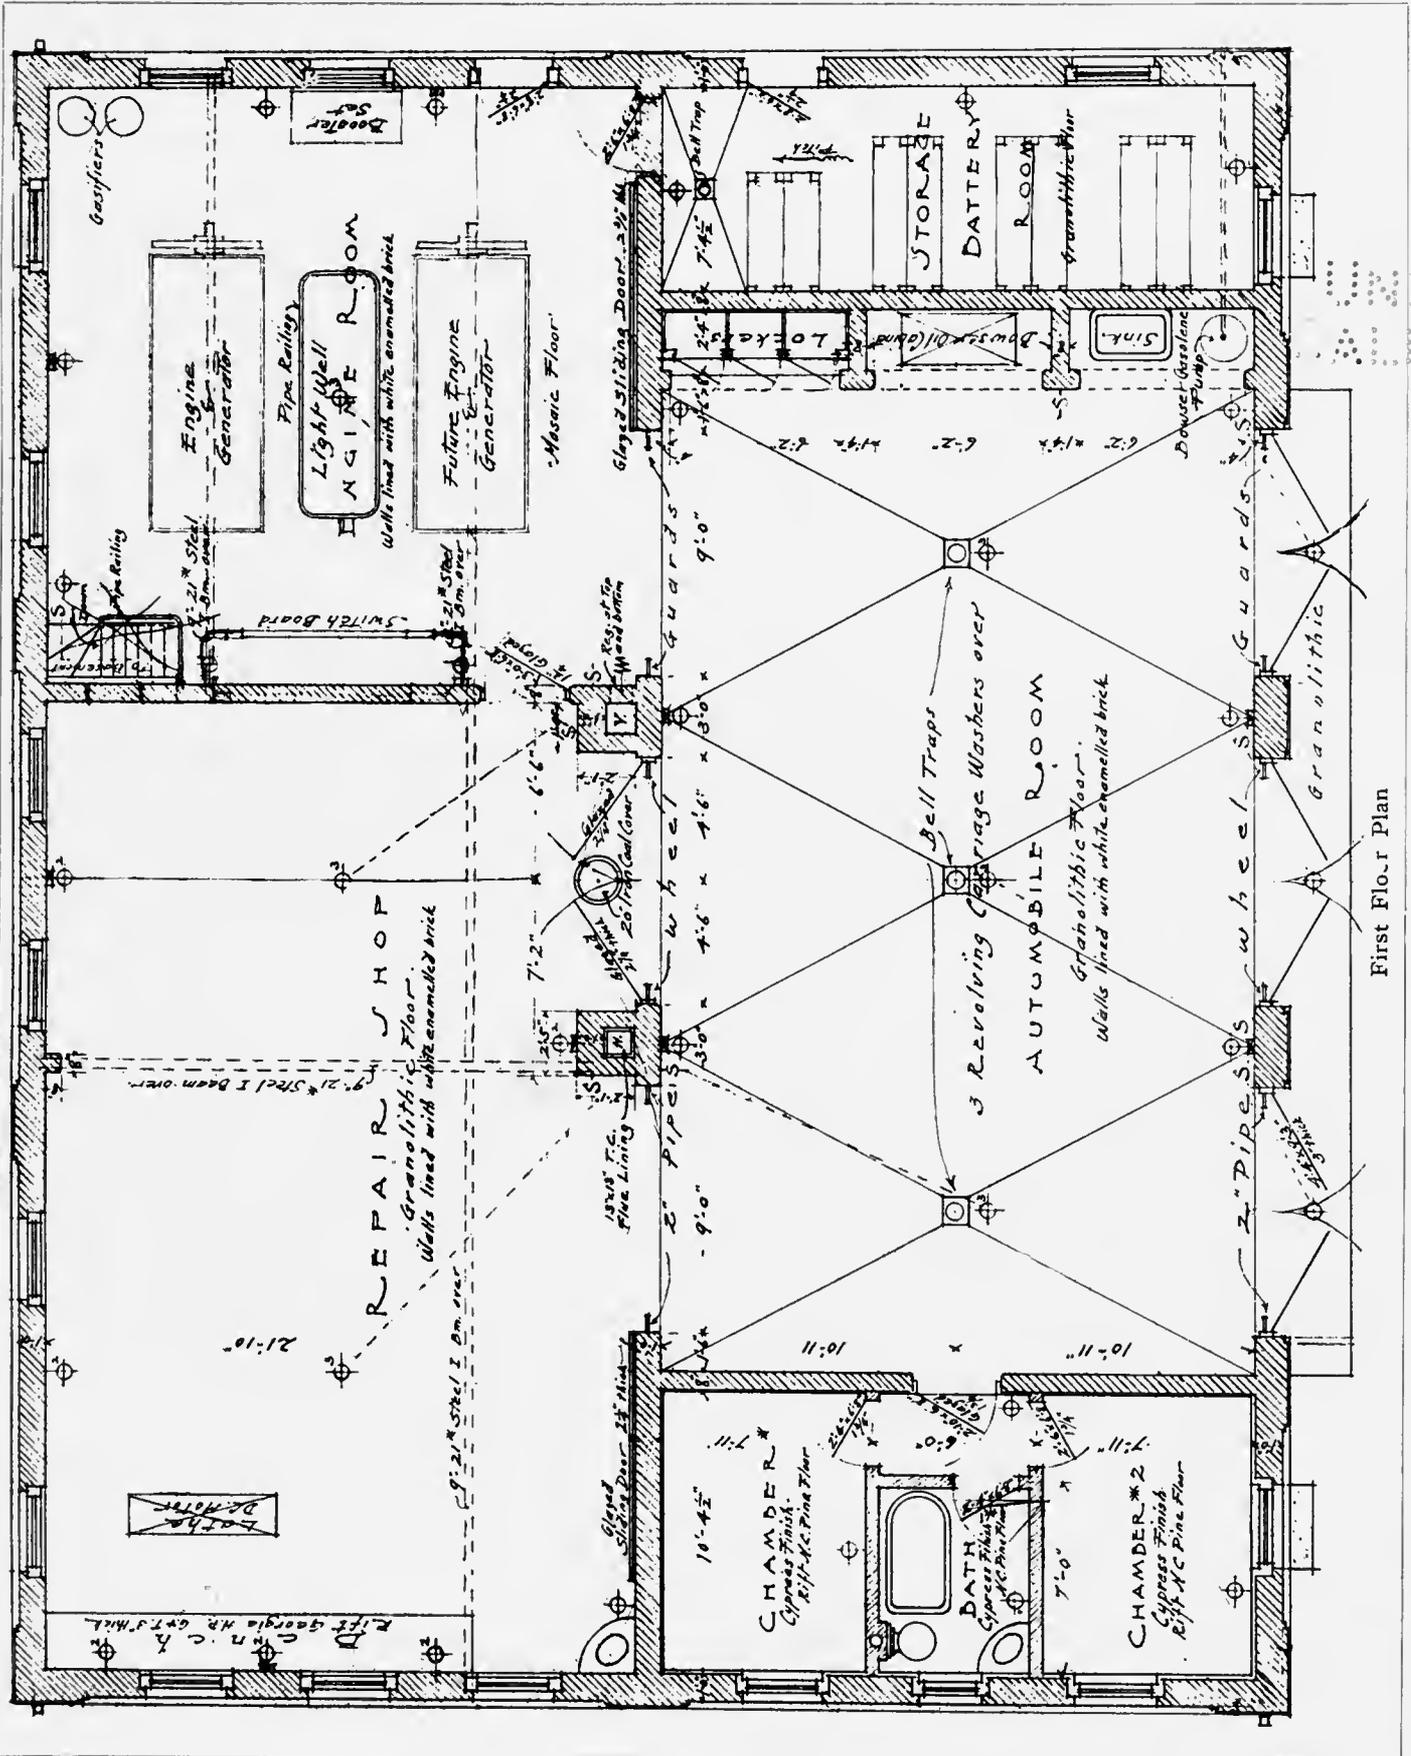

First Floor Plan

GARAGE AND POWER HOUSE FOR THOS. E. PROCTOR, TOPSFIELD, MASS.  
Putnam & Cox, Architects

no vial  
informado

GARAGES—COUNTRY AND SUBURBAN



INTERIOR VIEWS OF GARAGE AND POWER HOUSE AT TOPSFIELD, MASS.  
Putnam & Cox, Architects





INTERIOR OF A GARAGE AT IPSWICH, MASS.

Putnam & Cox, Architects

The glazed brick walls and large window and door openings make a light interior




VIEW OF A PART OF THE INTERIOR OF A GARAGE AT NEWTON, MASS.

Putnam & Cox, Architects

Showing Turntable, gasoline pump and workroom

10 2011  
11 2011

GARAGES—COUNTRY AND SUBURBAN

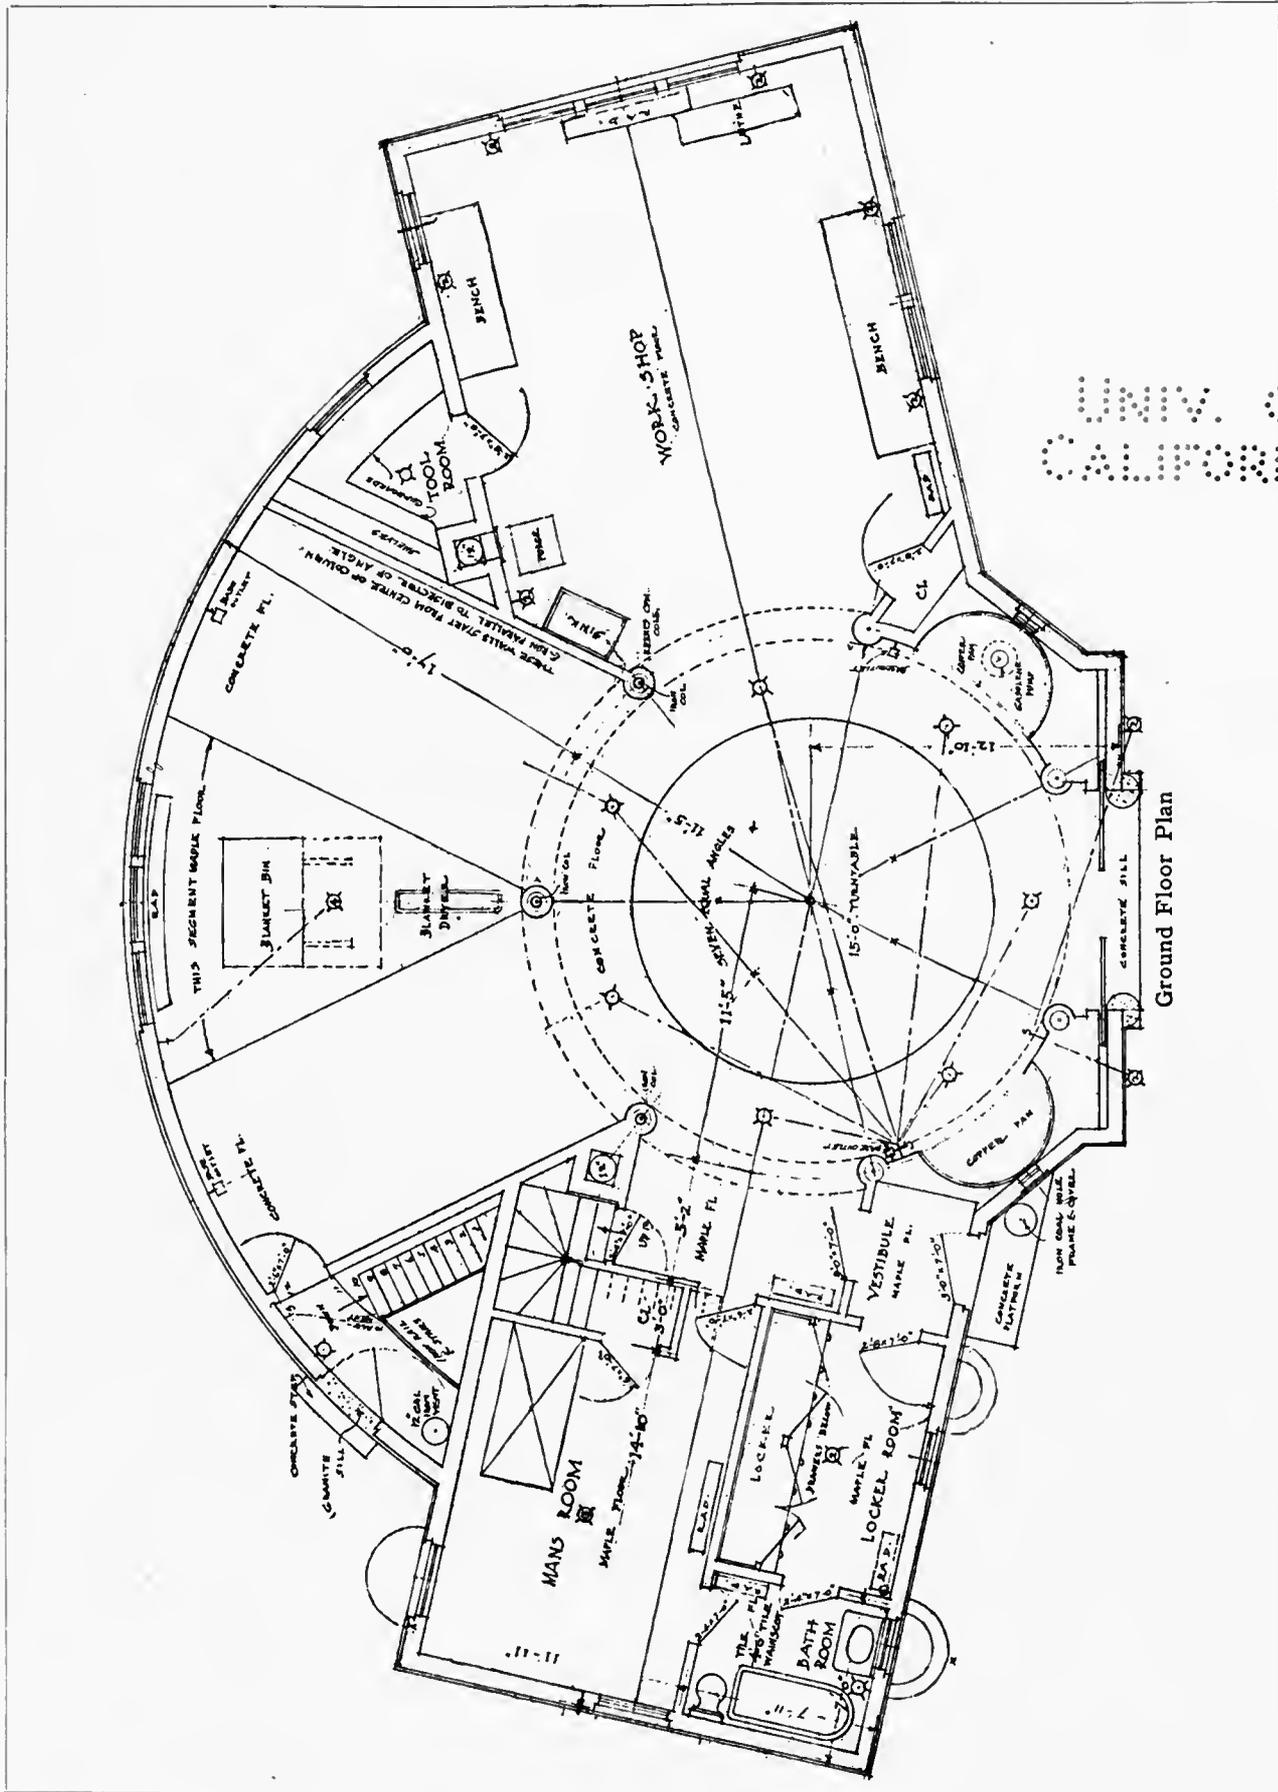


5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100

GARAGE AT CHESTNUT HILL, MASS.  
Putnam & Cox, Architects

NO. 1000  
1000000000



GARAGES—COUNTRY AND SUBURBAN

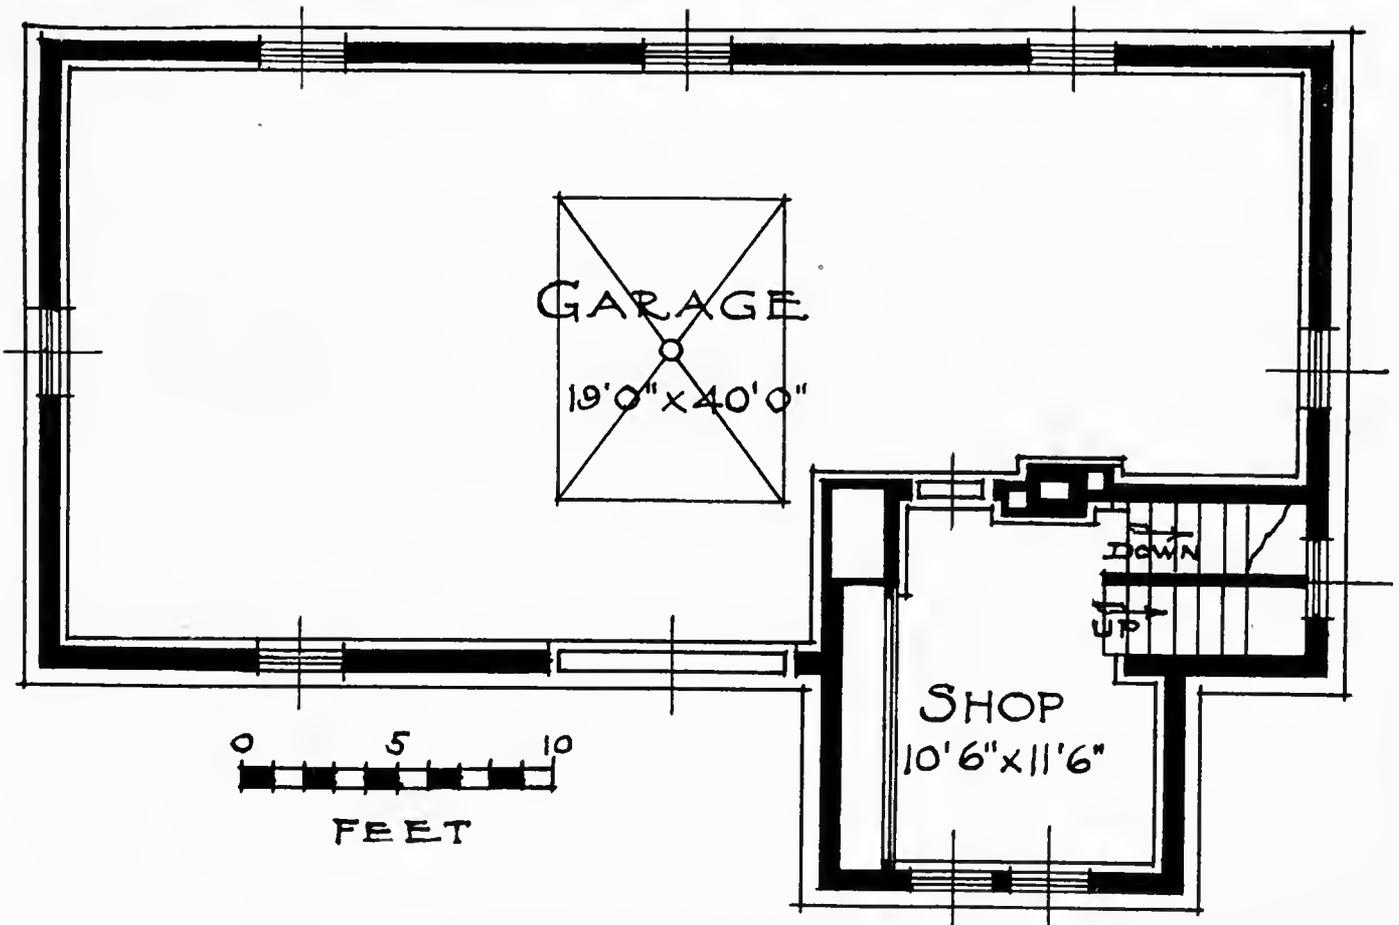

A GARAGE AT CLEVELAND, OHIO  
Bohnard & Parsson, Architects


© 1991  
AMERICAN

GARAGES—COUNTRY AND SUBURBAN

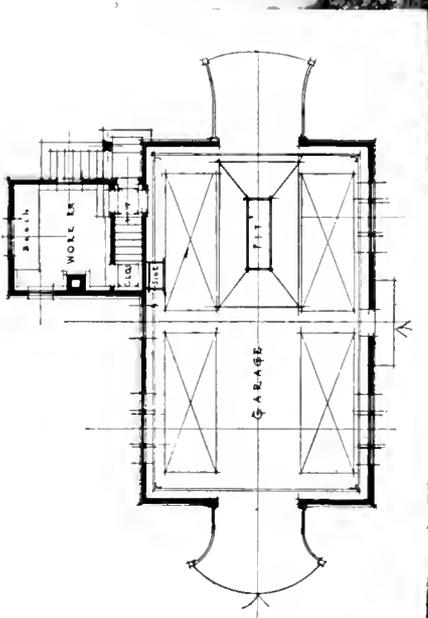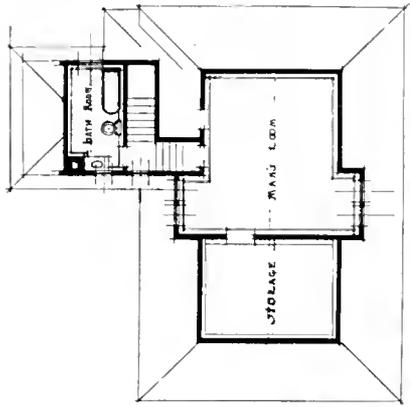

A GARAGE AT NORTH EASTON, MASS.  
S. B. Parker, Architect

NO. 1000  
ALBERTA

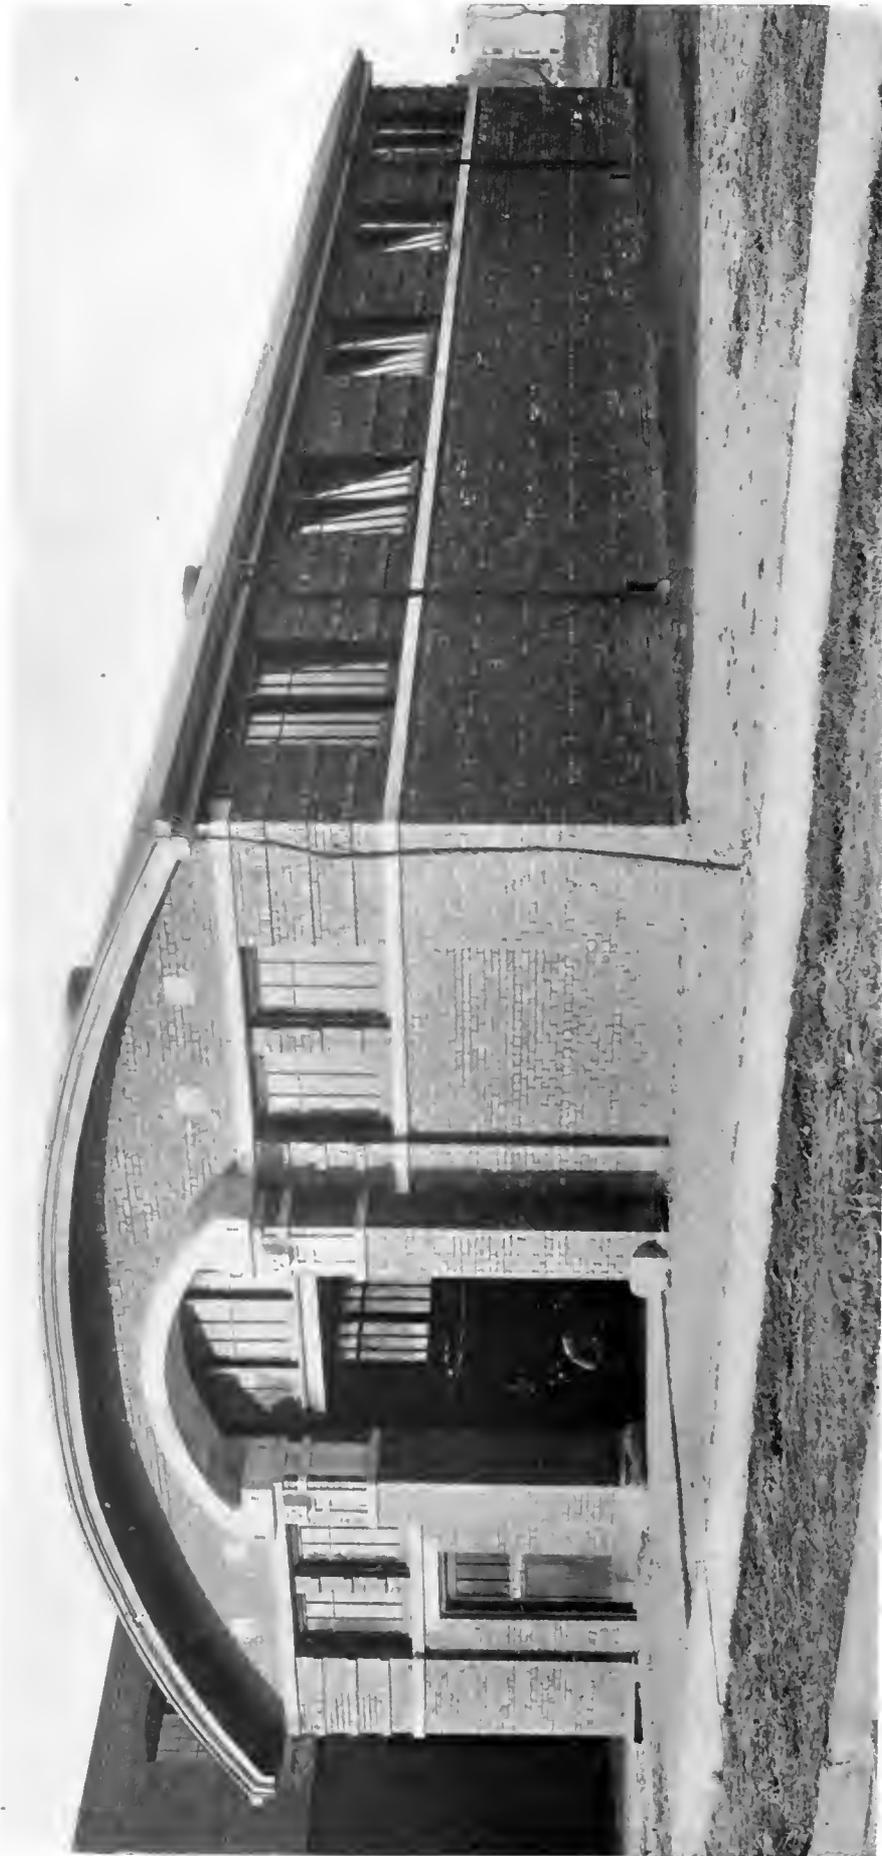


Garage

GARAGE FOR MESSRS. SEARS, ROEBUCK & CO.

CHICAGO, ILL.

Nimmons & Fellows, Architects


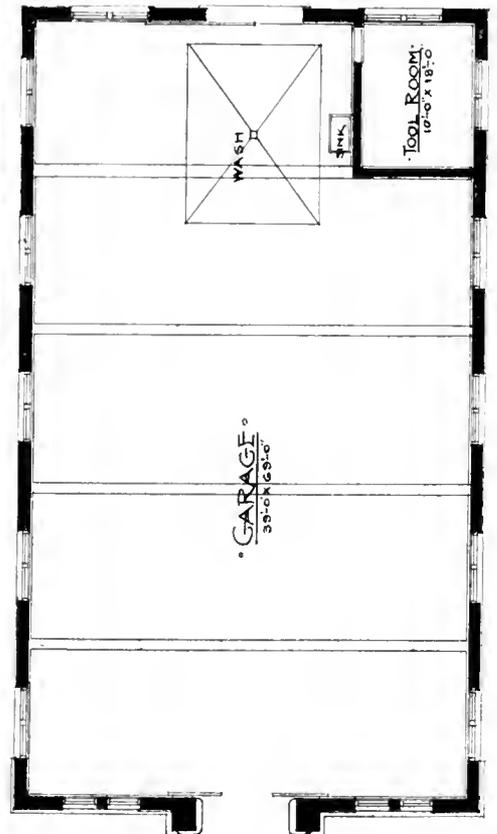







GARAGE AT OAK PARK, ILL.  
Tallmadge & Watson, Architects



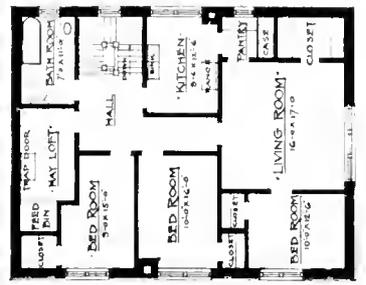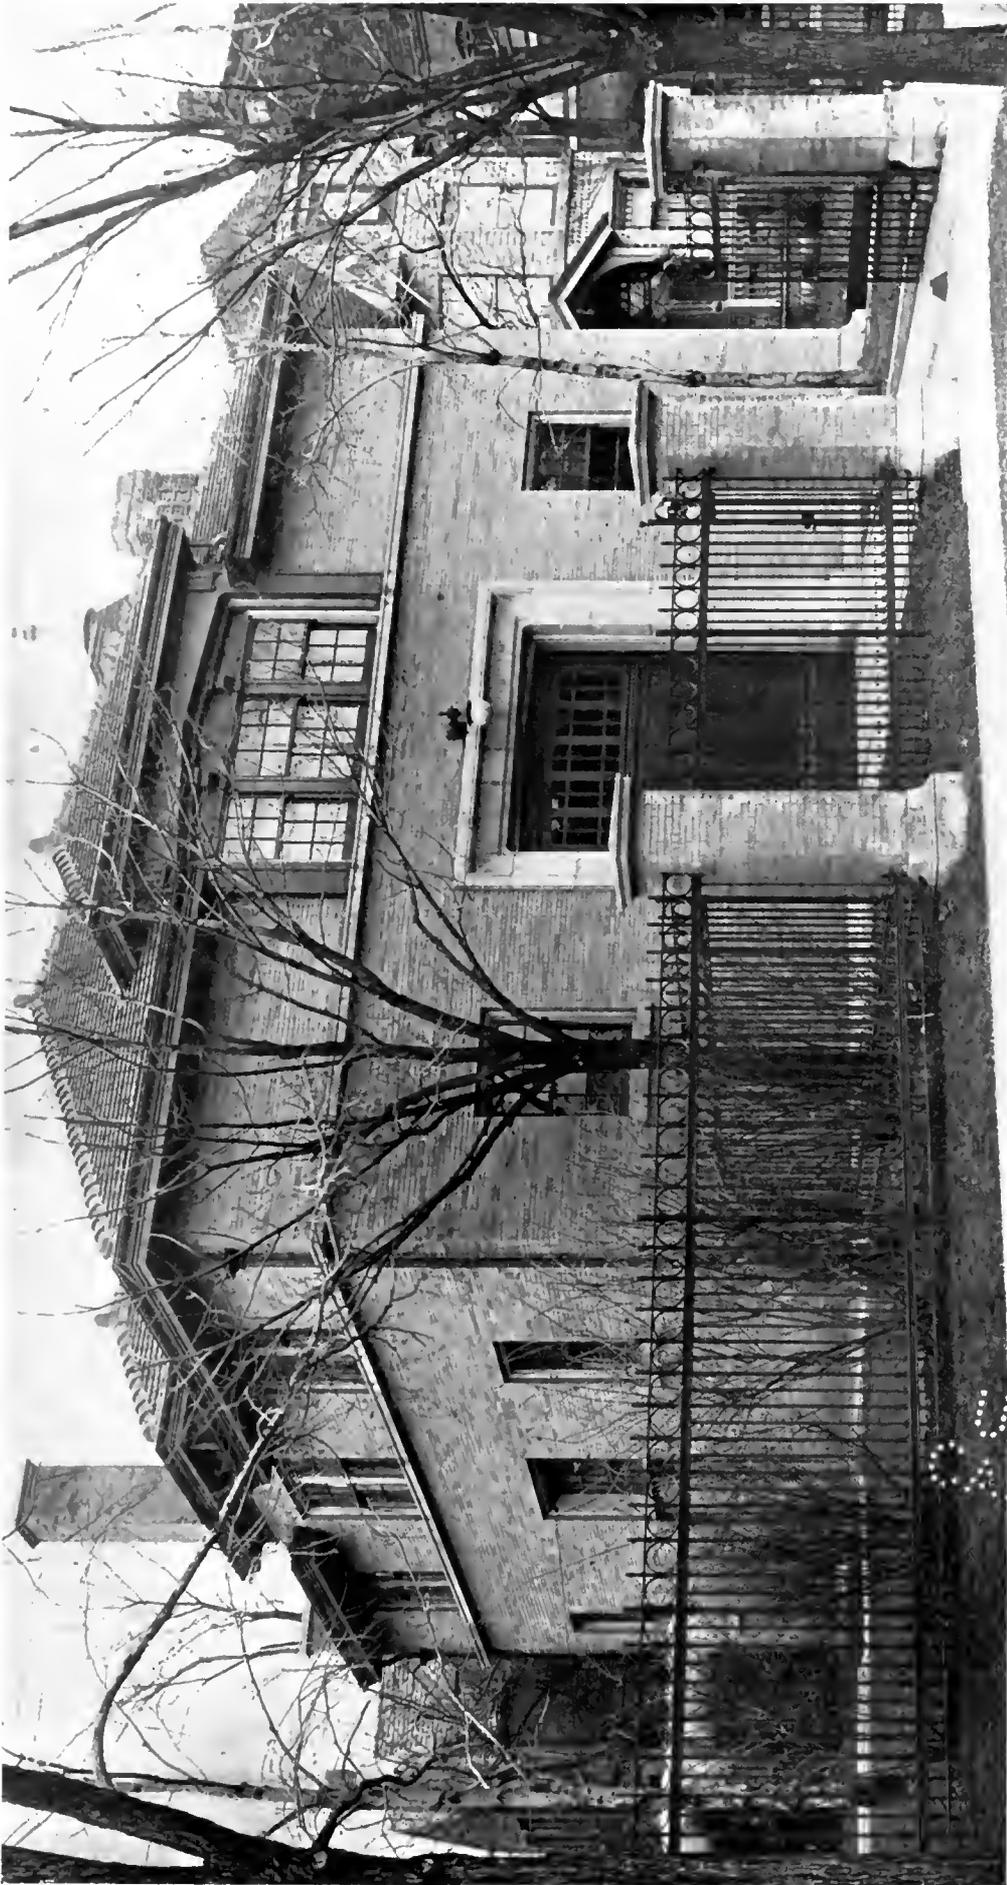


CARAGE OF W. V. KELLEY, ESQ.  
CHICAGO, ILL.

Messrs. Nimmons & Fellows, Architects

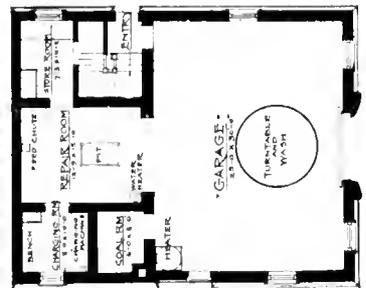




GARAGES—COUNTRY AND SUBURBAN

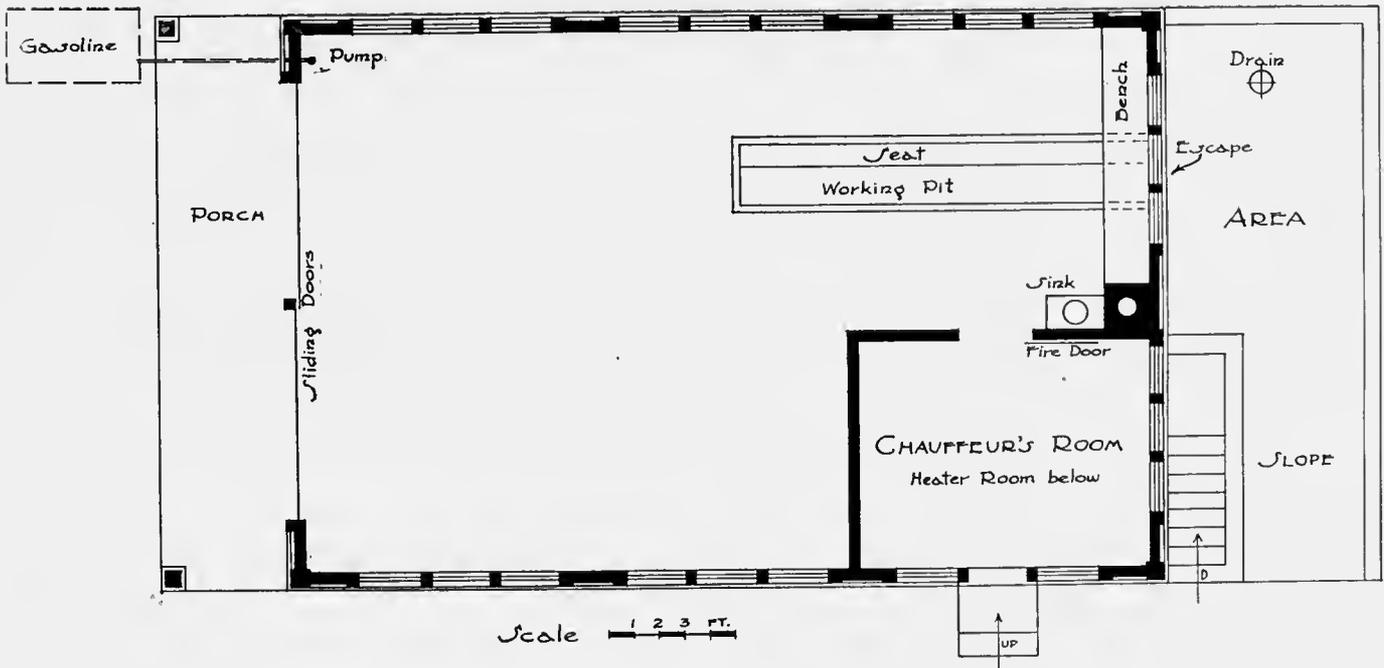

A GARAGE AT SYRACUSE, N. Y.  
Alfred T. Taylor, Architect

NO 194  
AMONGST

GARAGES—COUNTRY AND SUBURBAN

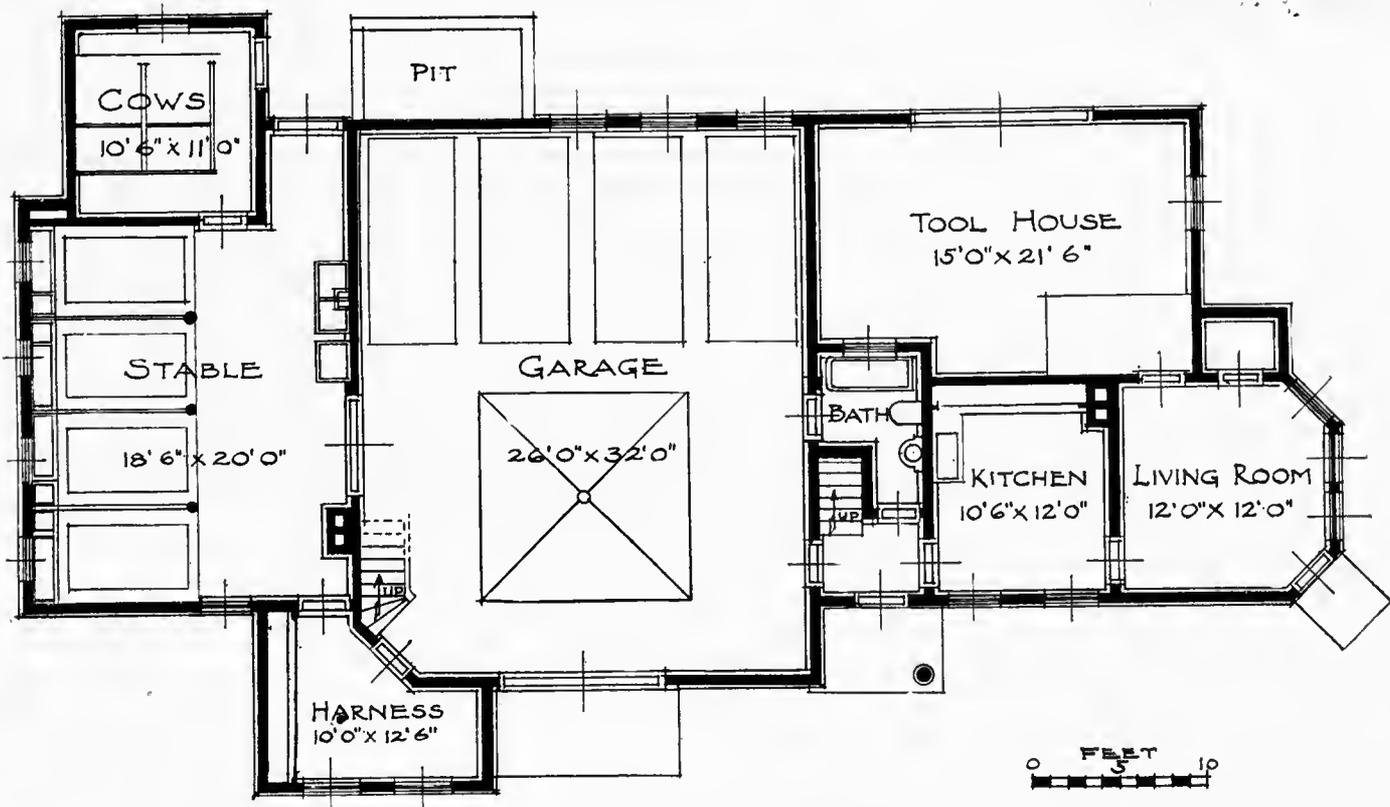


STABLE AND GARAGE AT WILLOUGHBY, OHIO


Bohnard & Parsson, Architects

40 VIII  
ANNEXIAO


GARAGES—COUNTRY AND SUBURBAN

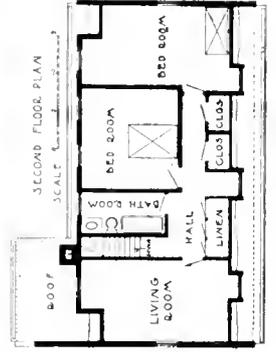

GARAGE OF R. W. BIRD, ESQ.  
BROOKLINE, MASS.  
J. Lavelle, Architect

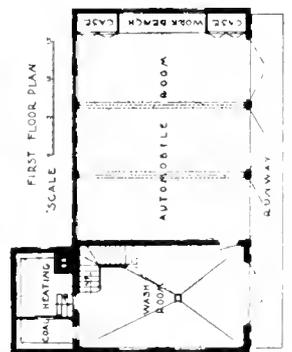





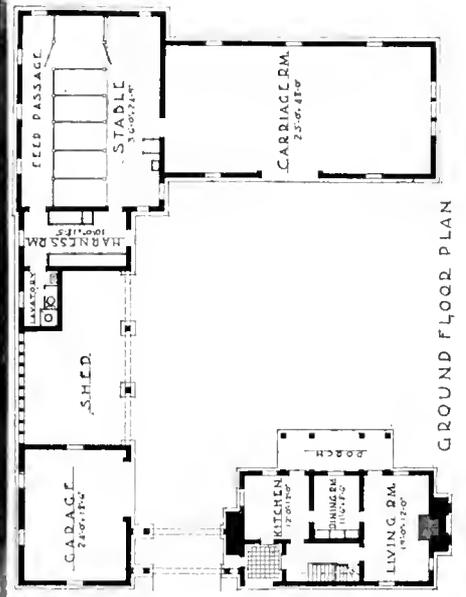

GARDENER'S COTTAGE AND GARAGE AT  
KENNEBUNKPORT, ME.  
Green & Wicks, Architects




NO. 100  
1000000000

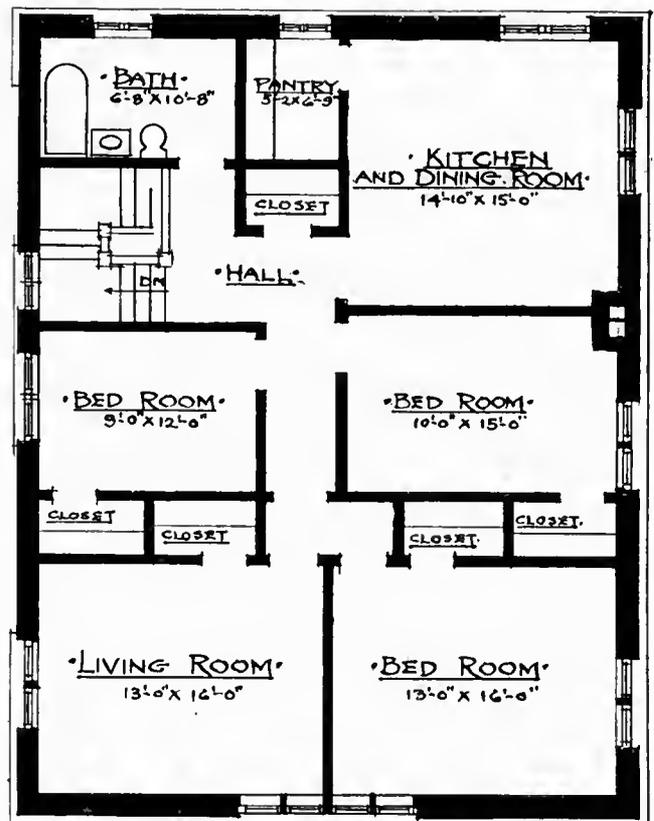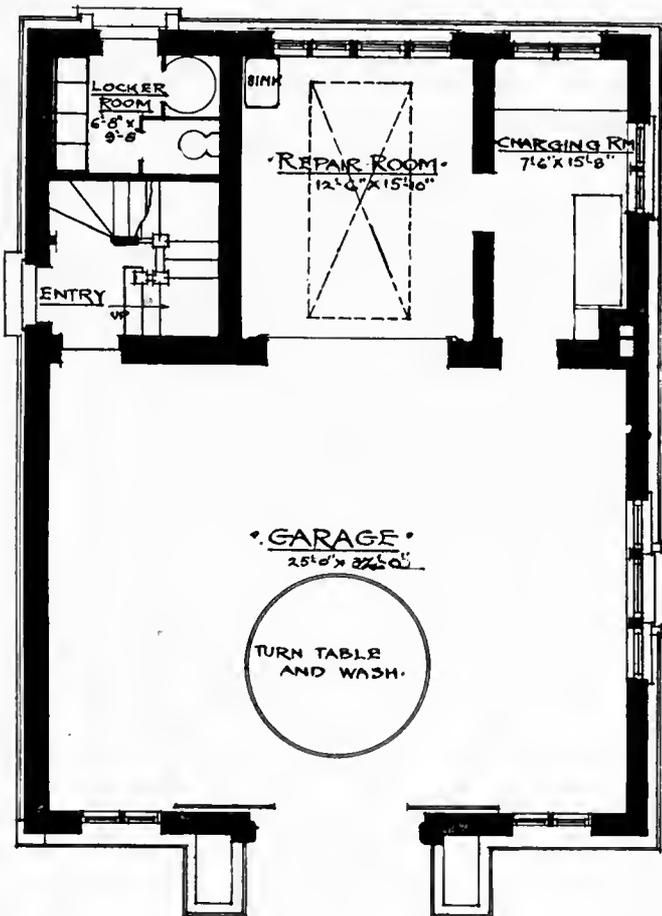

A CHICAGO GARAGE


Messrs. Nimmons & Fellows, Architects

70 7181  
ANNOUNCING

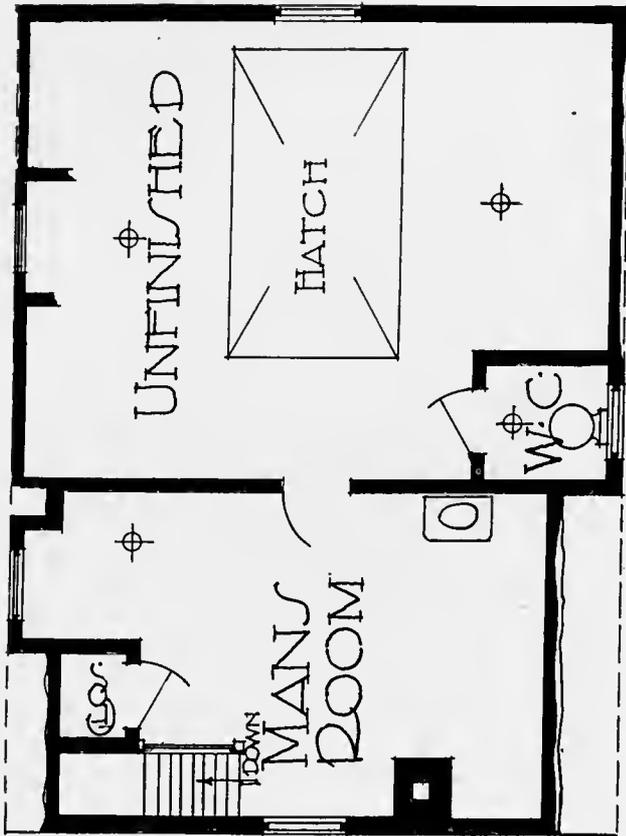


GARAGE AT BEVERLY, MASS.  
Kilham & Hopkins, Architects.

This garage has a concrete foundation to the height of the window sill, forming a curve with the floor slabs. Above concrete the walls are of frame, wire lathed, both sides. The roof is of red slate to match the other buildings on the estate.

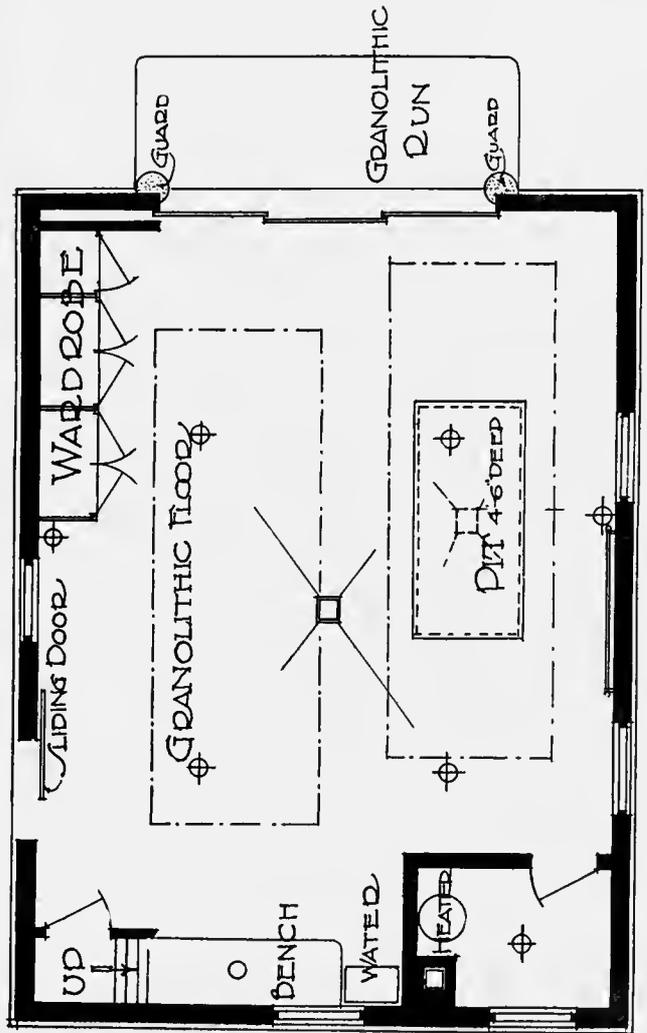


0250

no valid  
analysis

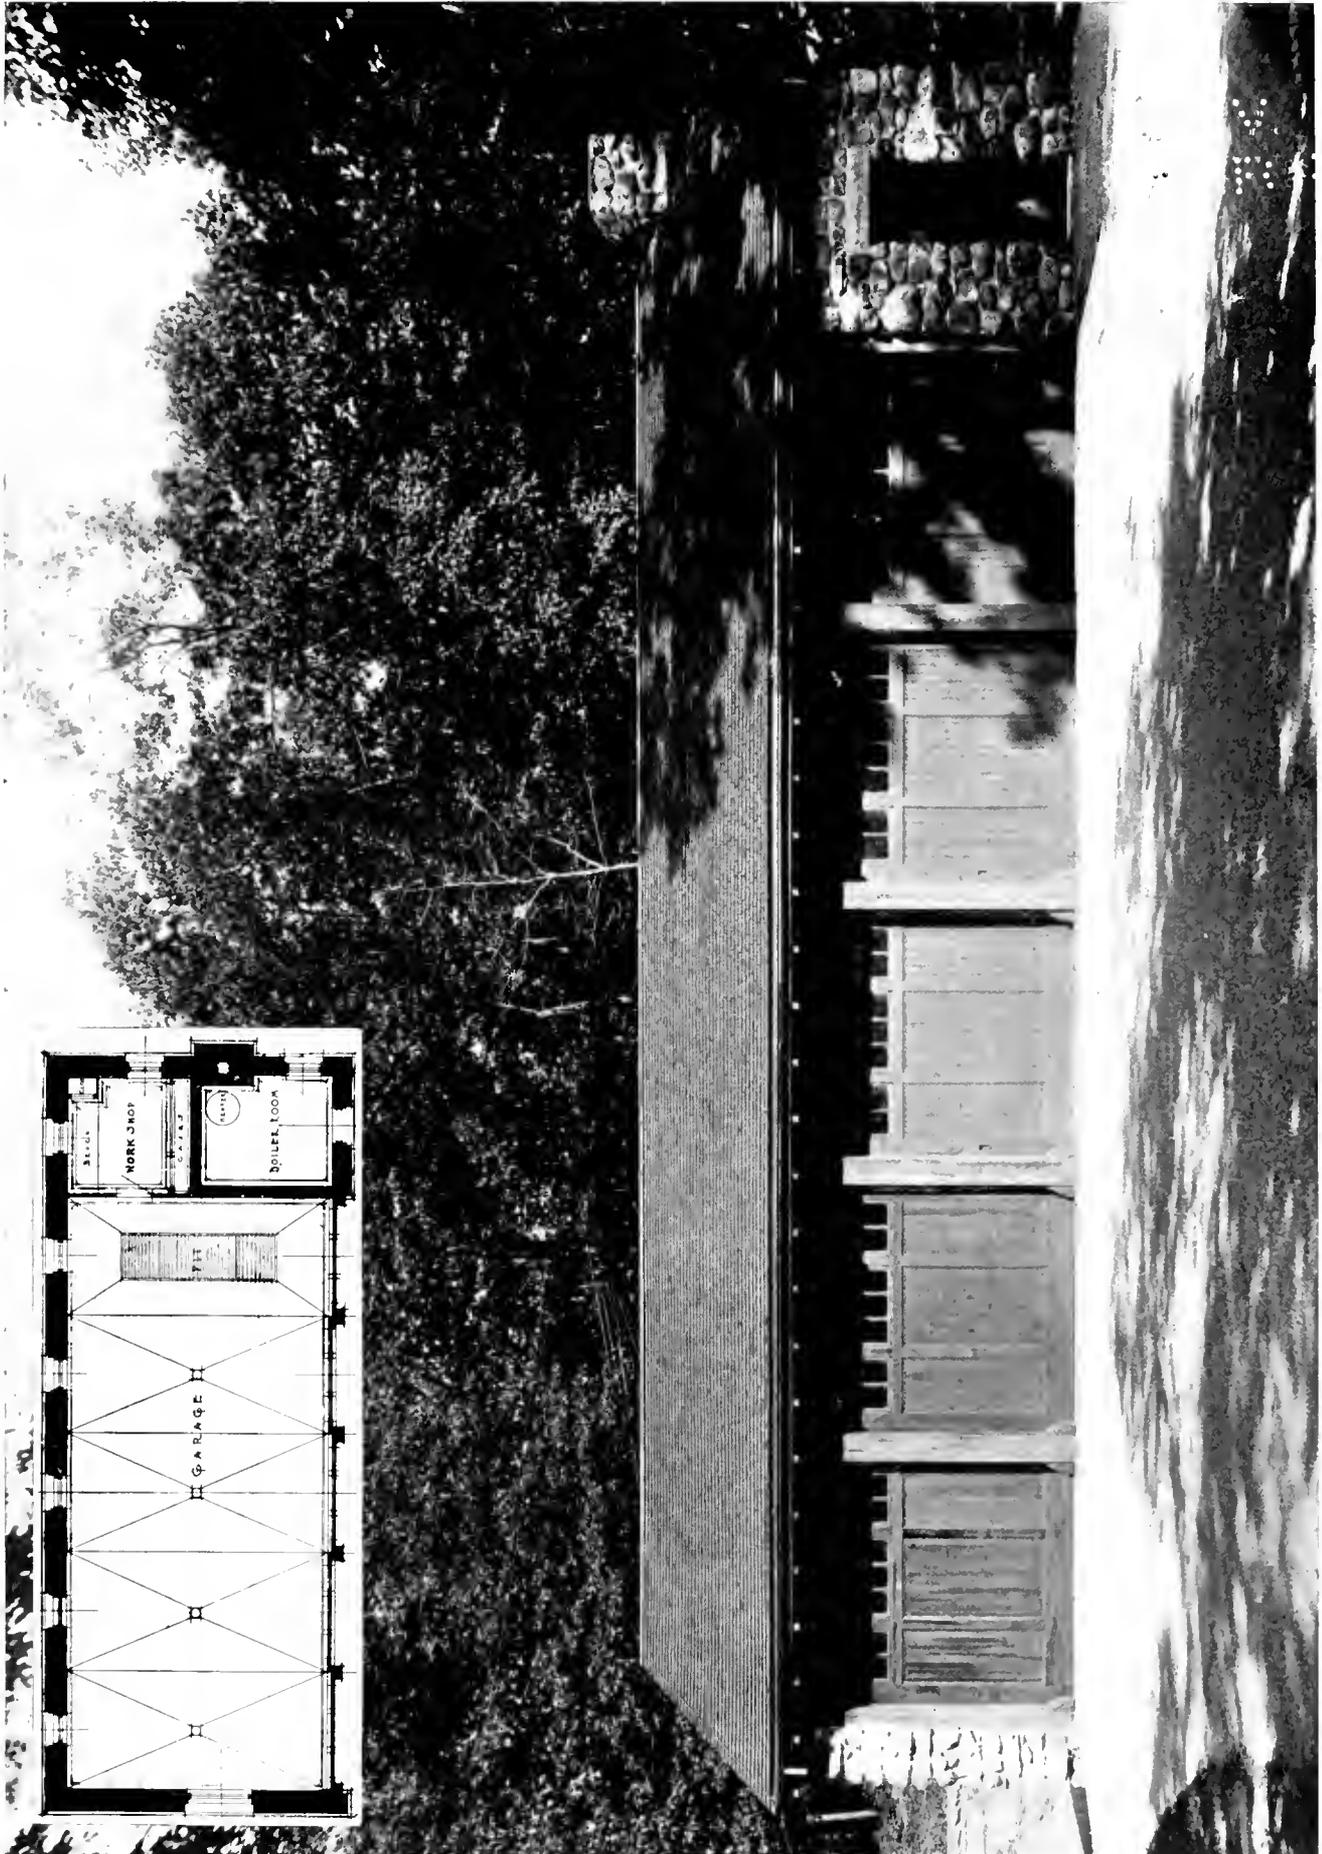

A GARAGE AT NORTH EASTON, MASS.  
S. B. Parker, Architect.

TO THE  
DIVISION OF  
CALIFORNIA

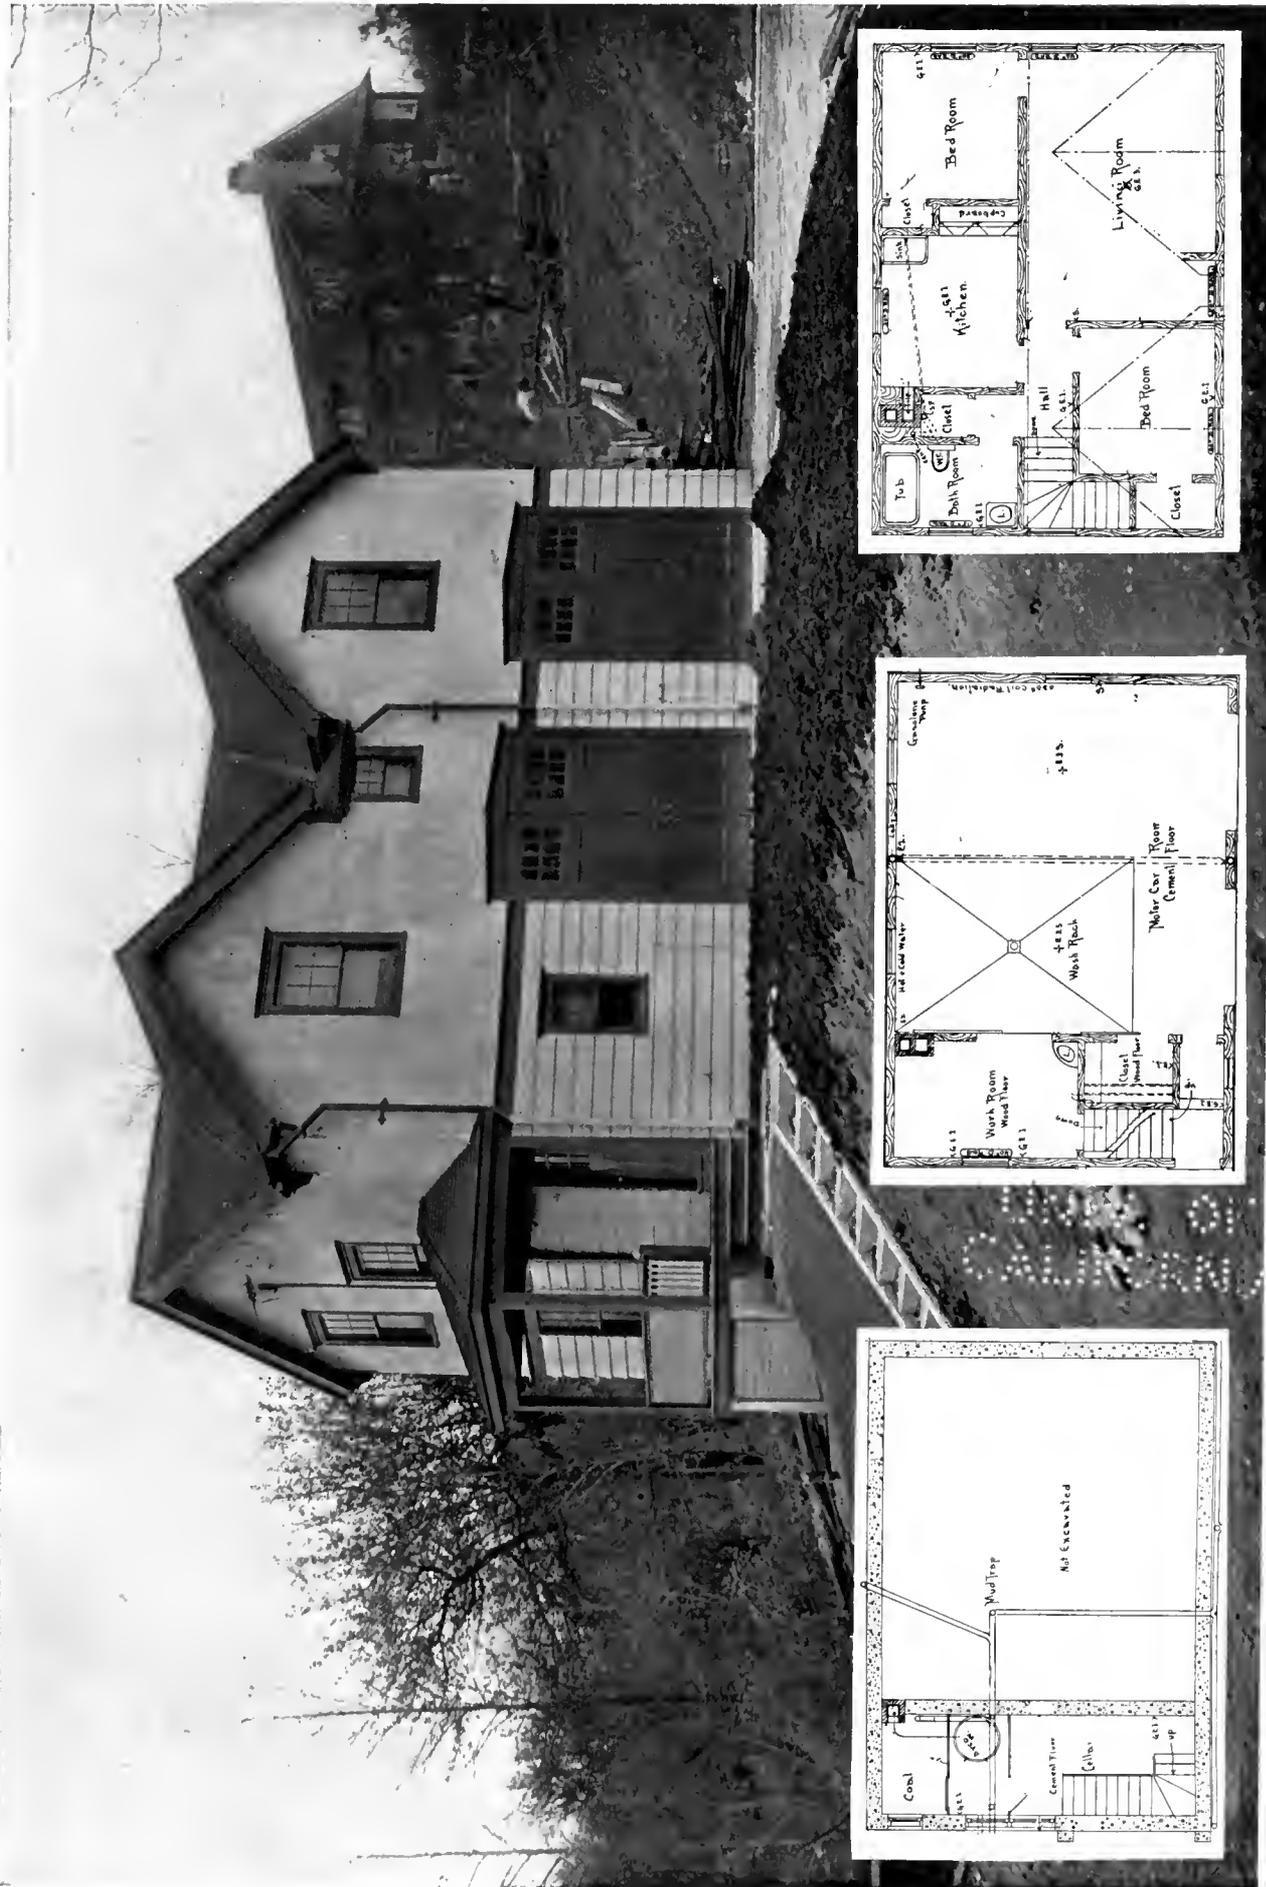



GARAGE AT ROCHESTER, N. Y.

James R. Tyler, Architect







Plate 30

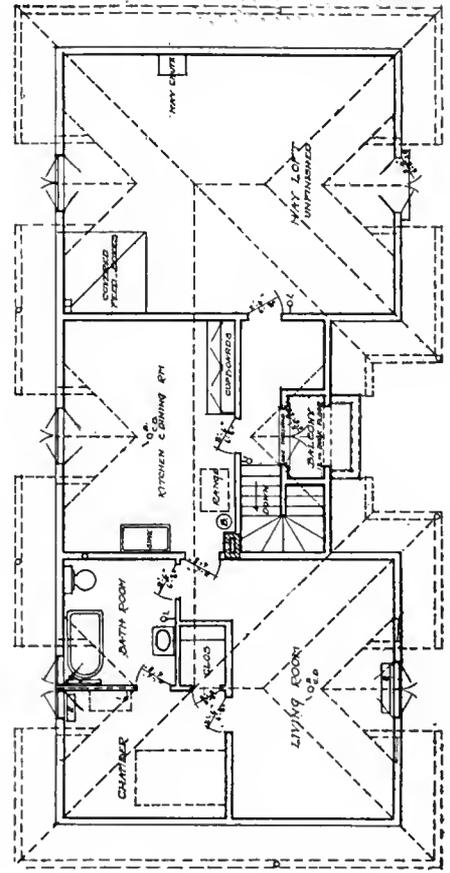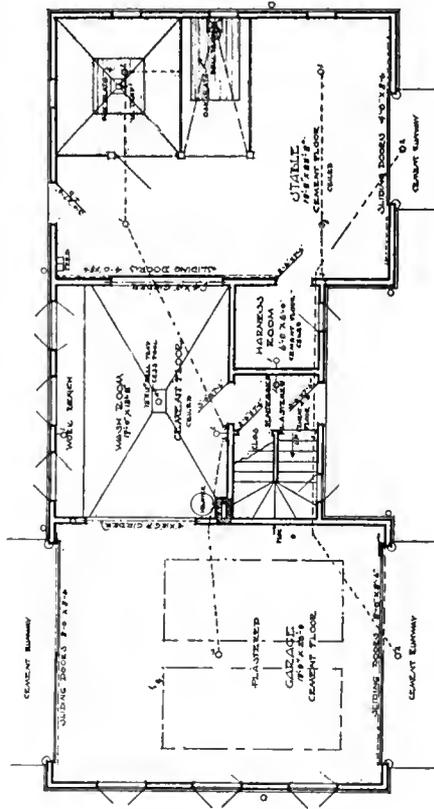

GARAGE FOR MR. CHARLES STERN, EAST AVE., ROCHESTER, N. Y.

Foote & Headley, Architects



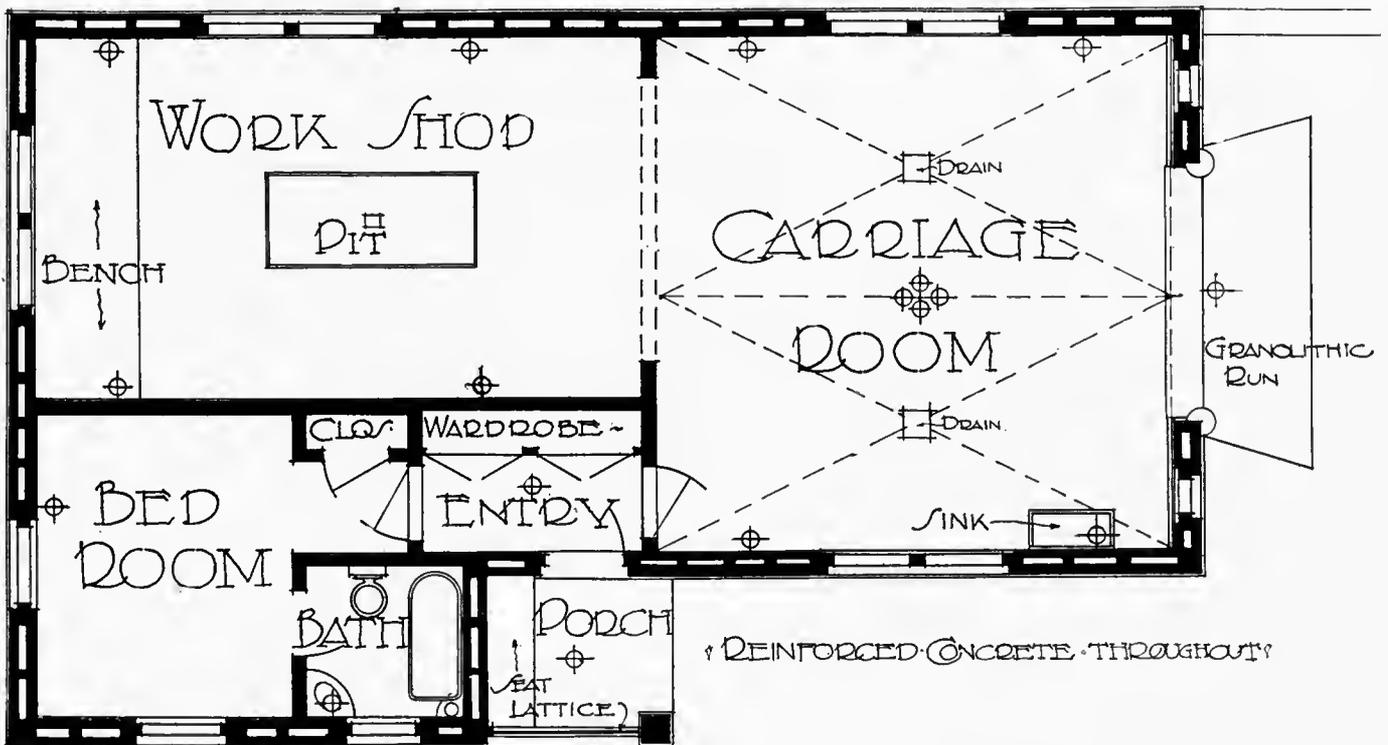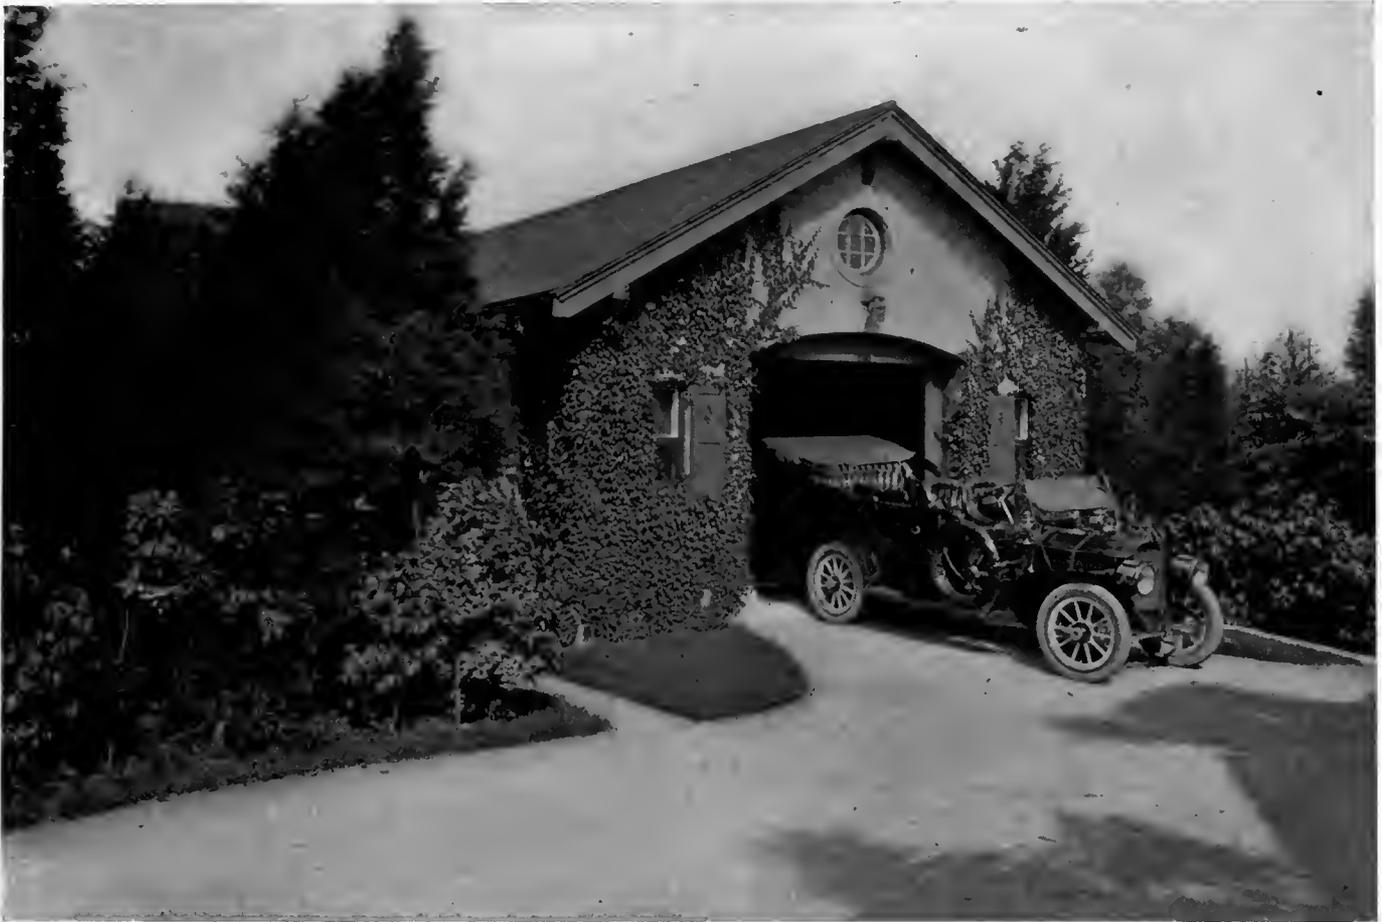


A GARAGE AT COHASSET, MASS.  
Kilham & Hopkins, Architects

TO THE  
LIBRARY OF  
CONGRESS




NO. 1000  
ABSTRACT

GARAGES—COUNTRY AND SUBURBAN

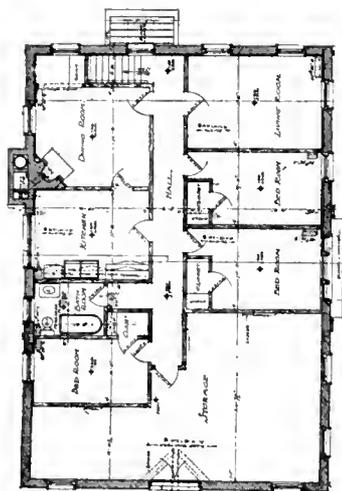

GARAGE FOR MR. W. K. JACKSON  
BUFFALO, N. Y.  
McCreary, Wood & Bradney, Architects


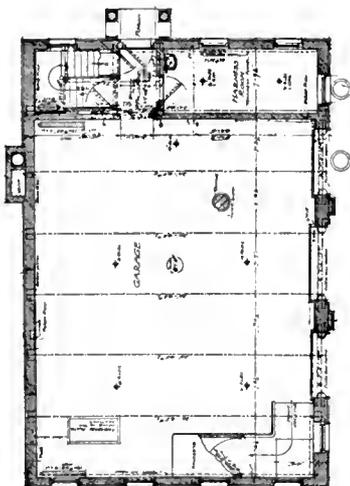


70 1941  
ANPOTULAS



GARAGE NEAR BOSTON, MASS.  
J. A. Schweinfurth, Architect

TO VINU  
ABBOGLIO

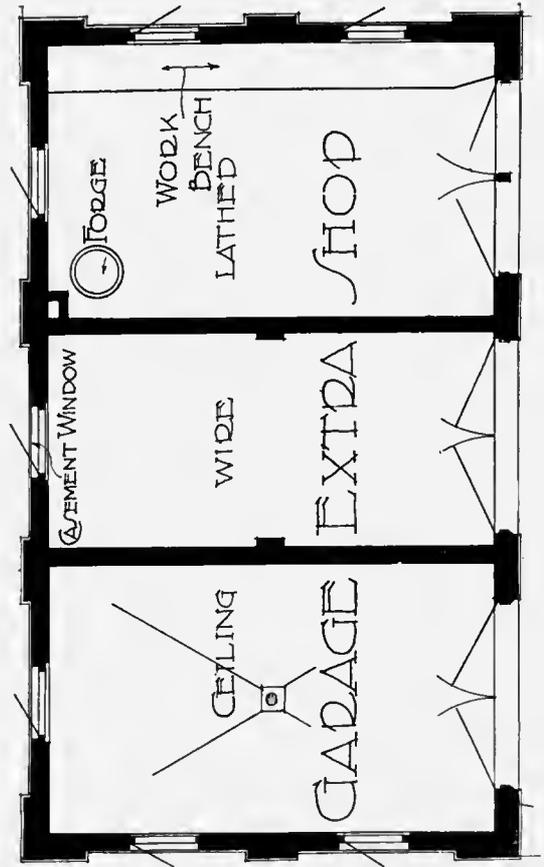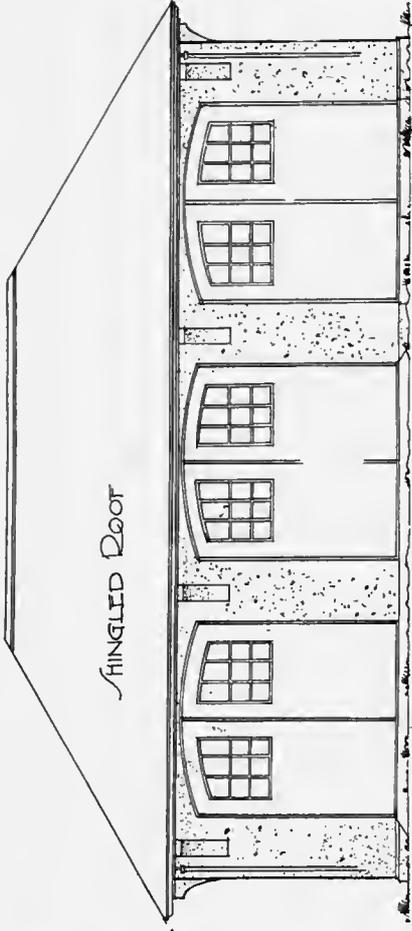


GARAGE OF J. C. HOPKINS, ESQ., DOVER, MASS.

Kilham & Hopkins, Architects

Built of brick, with walls plastered outside

THE UNIVERSITY OF  
CAROLINA



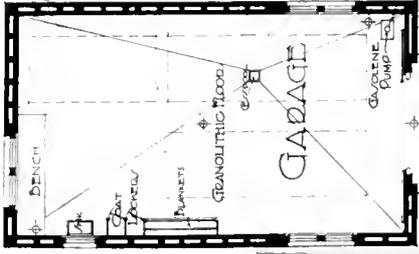

GARAGE OF A. C. LAWRENCE, ESQ.  
MARBLEHEAD NECK, MASS.

Kilham & Hopkins, Architects


Built of mass concrete, reinforced at openings



NO. 100  
AMERICAN



CONCRETE GARAGE OVERLOOKING LAKE NEAR WINCHESTER, MASS.

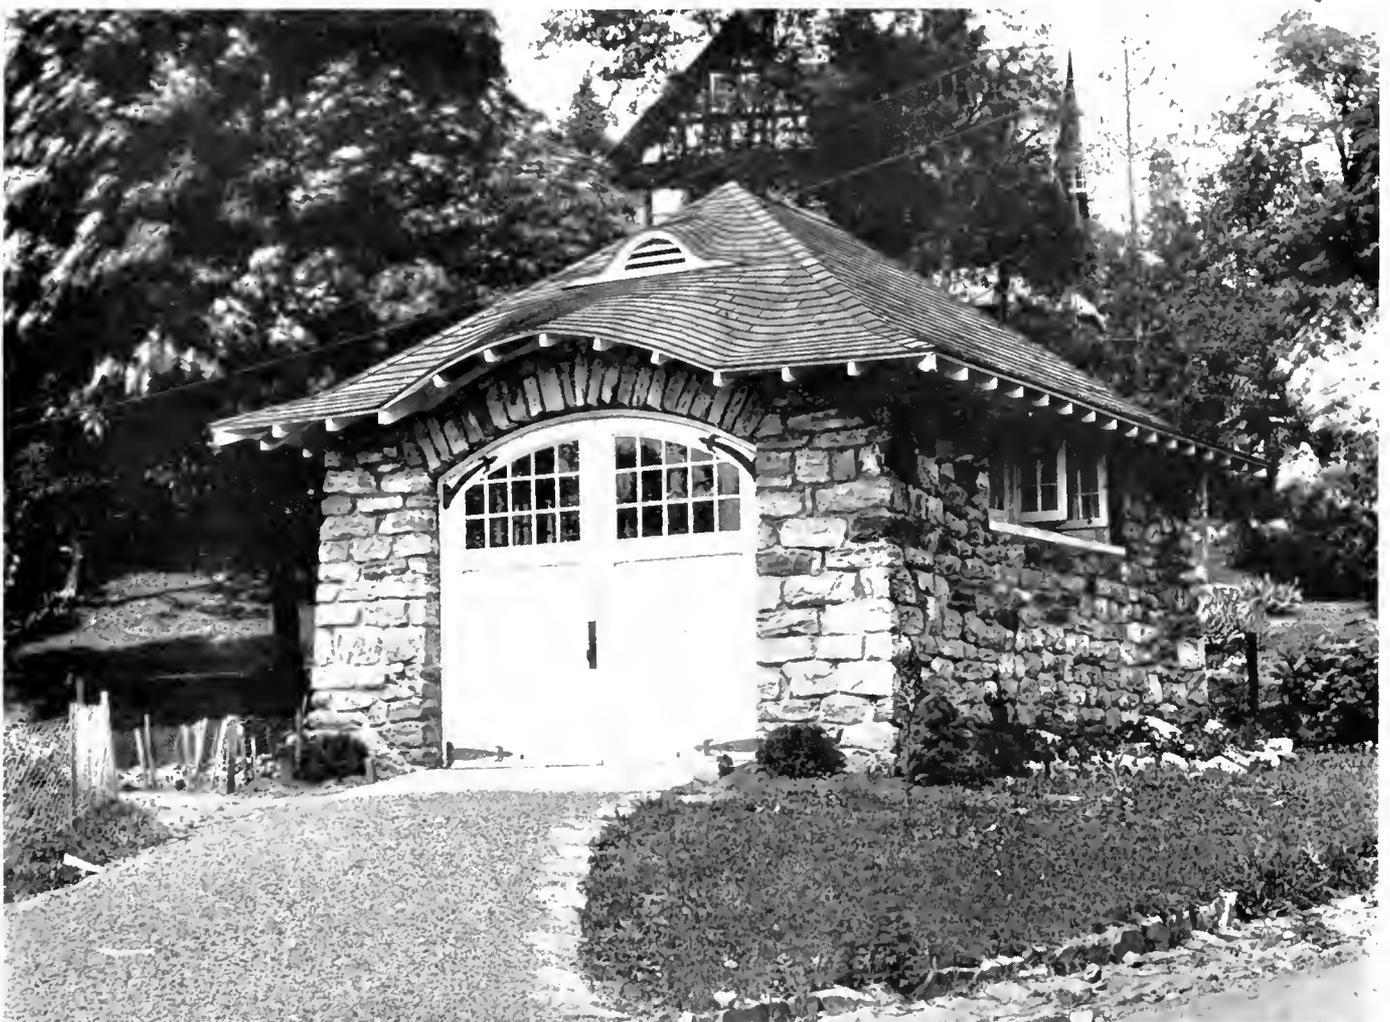

GARAGE OF FIELD STONE WITH SHINGLE ROOF AT LAWRENCE PARK, BRONXVILLE, N. Y.

Wm. A. Baker, Architect





CEMENT GARAGE WITH PERGOLA, AT GLEN RIDGE, N. J.  
Davis, McGrath & Kiessling, Architects



A CEMENT GARAGE WITH PERGOLA, AT MONTCLAIR, N. J.  
This garage is built on a hillside corner lot. Road runs through the building, so that car may enter at one end and leave at the other





GARAGE OF CHARLES BEYERLE, ESQ., CAIRO, EGYPT  
Carlo Prampolini, Architect

no vmd  
cassette



ONE-CAR CEMENT GARAGE AT BROOKLINE, MASS.  
Charles E. Barnes, Architect



A GARAGE BUILT OF CONCRETE BLOCKS AT ENGLEWOOD, N. J.  
Davis, McGrath & Kiessling, Architects

NO VAI  
ABRIL 1960



GARAGE AT ROSEMONT, PA.  
Built of local stone, with shingle roof



A SHINGLED GARAGE AT MARION, MASS.  
Chauffeur's bedroom and shower bath at right





10 2000  
2000000000

1

STONE, CARPENTER & WILSON, Architects



FRONT AND REAR VIEWS  
OF A GARAGE AT  
CHAPINVILLE, CONN.





SHINGLED ONE-CAR GARAGE, MARION, MASS.  
Wm. G. Preston, Architect



A CIRCULAR GARAGE AT SOUTH ORANGE, N. J.  
George W. Maher, Architect

TO WHOM IT MAY CONCERN



A ONE-CAR GARAGE ON ROCKLEDGE ROAD, MONTCLAIR, N. J.



GARAGE AT ROSEMONT, PA.

Alex. M. Adams, Architect





GARAGE AND STABLE AT COLLEGE HILL, CINCINNATI, O.  
Gamble & Rogers, Architects



GARAGES—COUNTRY AND SUBURBAN



BRICK AND HALF-TIMBER GARAGE AT ROLAND PARK, BALTIMORE, MD.

Alfred H. Taylor, Architect

Plate 47



GARAGES—COUNTRY AND SUBURBAN



GARAGE FOR TWO OR MORE CARS, WITH CHAUFFEURS' ROOMS ABOVE





A GARAGE AT ENGLEWOOD, N. J.

Donn Barber, Architect

This building has accommodations on second floor for gardener and chauffeur



GARAGE BUILT OF LOCAL STONE, AT MOUNT AIRY, PHILADELPHIA, PA.

Billiard room in second story

2020



*Photo. copyright by Atlas Portland Cement Co.*

A CEMENT GARAGE IN THE SUBURBS OF NEW YORK



*Photo. copyright by Atlas Portland Cement Co.*

A SOLID CONCRETE GARAGE FOR TWO CARS AT WASHINGTON, D. C.





STREET FRONT AND REAR VIEW OF A "ROUGH COAT" GARAGE ON RIDGEWOOD AVENUE, GLENRIDGE, N. J.






*Photo, copyright by Atlas Portland Cement Co.*  
CEMENT GARAGE ON THE "NORTH SHORE," NEAR BOSTON, MASS.  
Arthur Huen, Architect



A SHINGLED ONE-CAR GARAGE, WINCHESTER, MASS.  
Edwin R. Blaikie, Architect

to vml  
august 1900

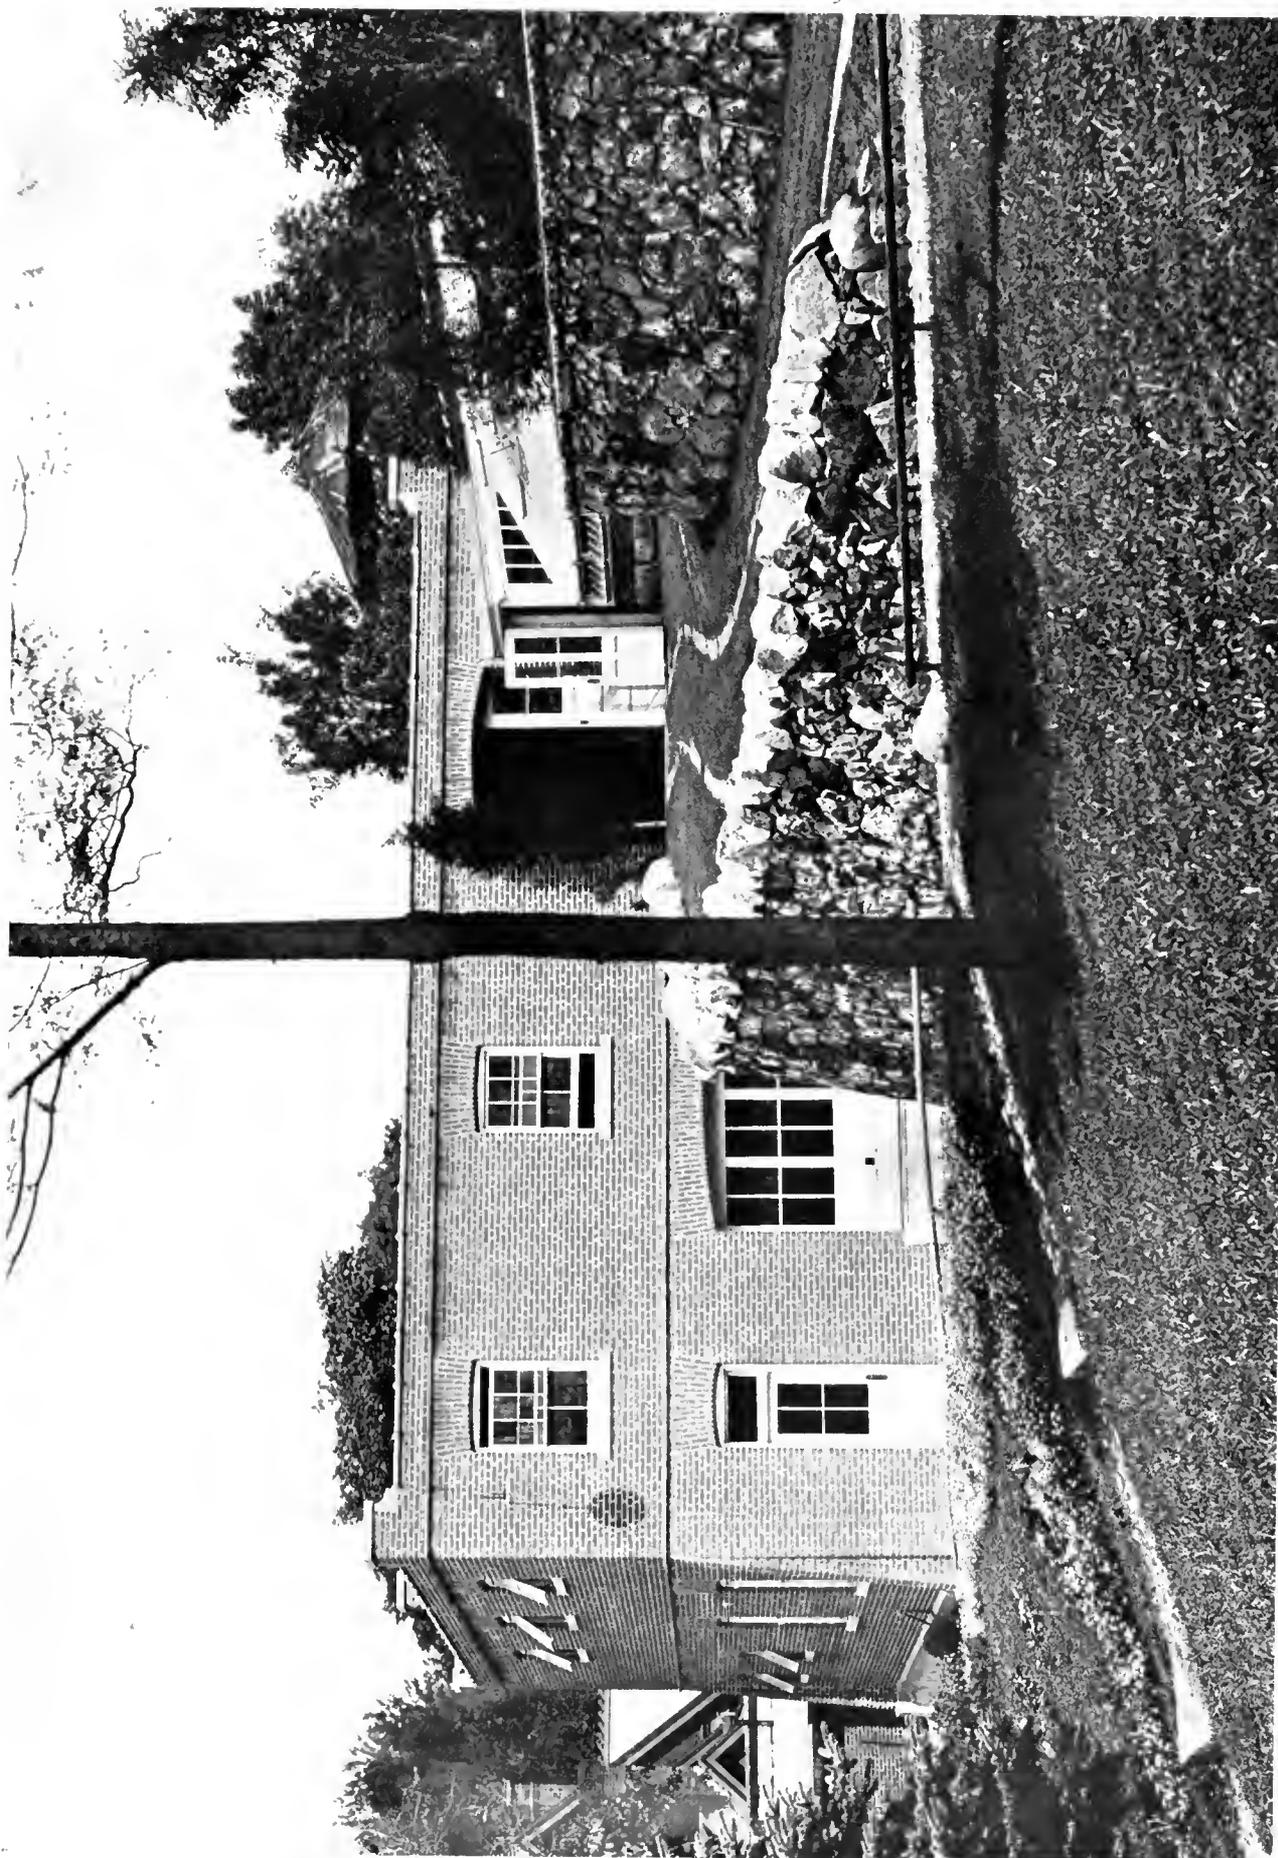


GARAGE AND STABLE AT WATERBURY, CONN.

E. E. Benedict, Architect

Stable in Basement, Garage above, Garden on Roof




GARAGES—COUNTRY AND SUBURBAN

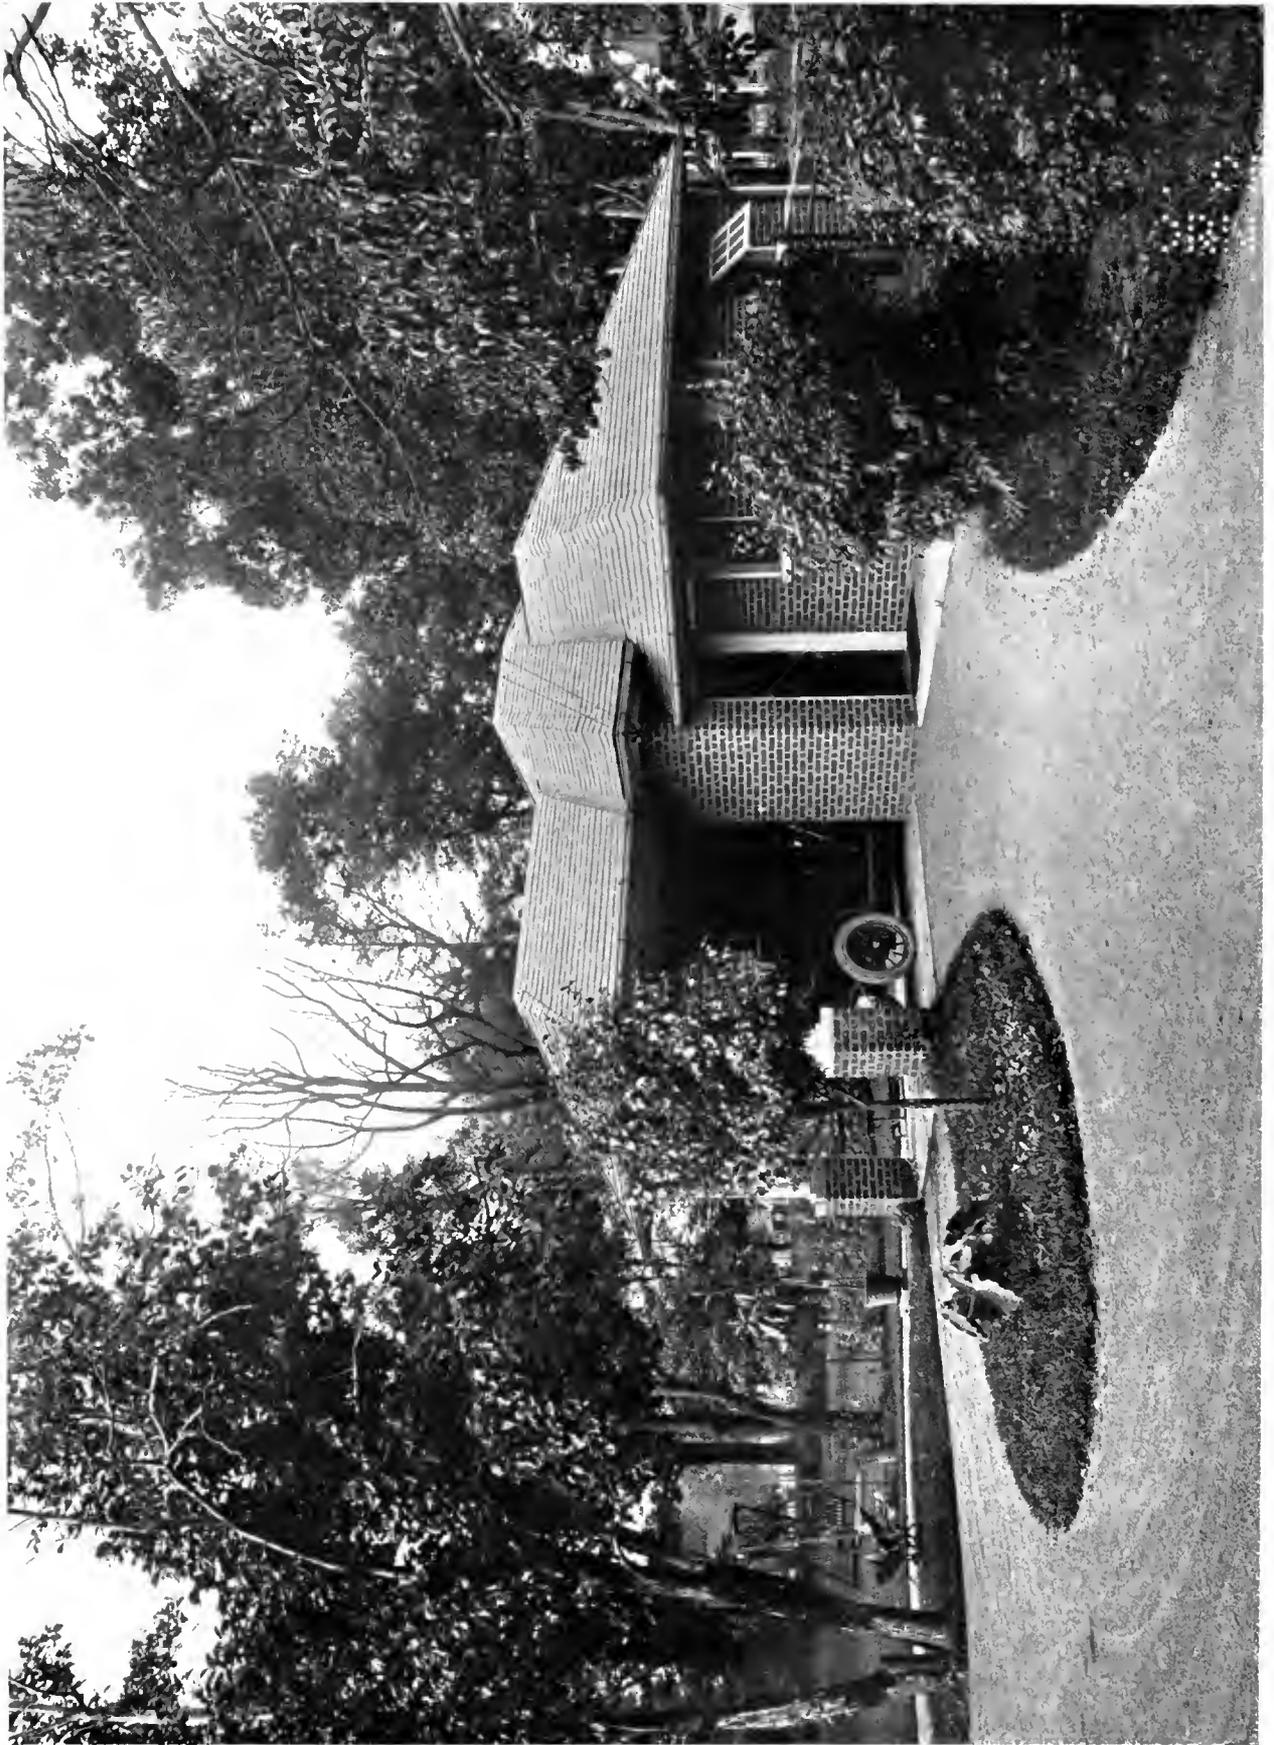


A BRICK GARAGE WITH SHINGLE ROOF AT MOUNT AIRY, PA.



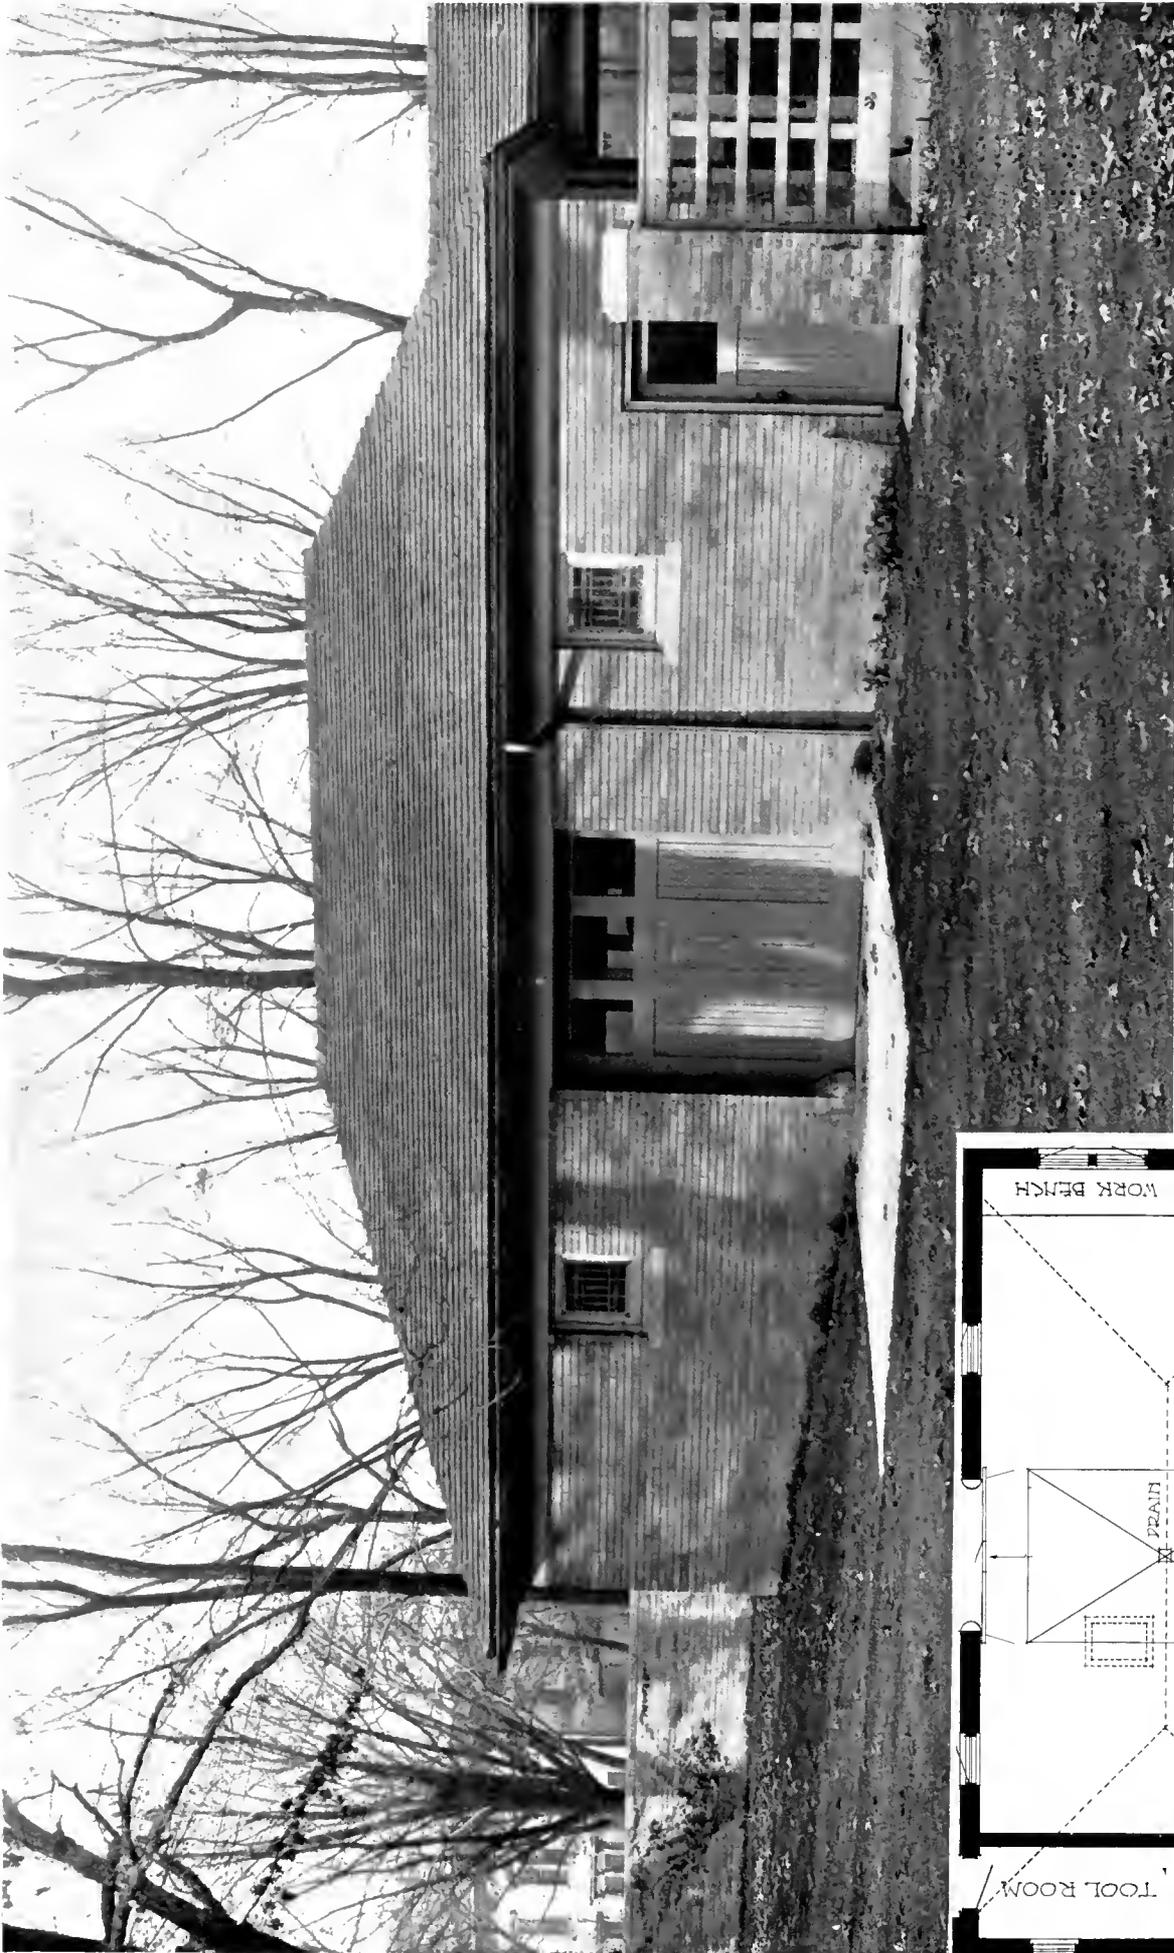


GARAGE FOR MR. E. W. MCCREADY, OAK PARK, ILL.  
Spencer & Powers, Architects

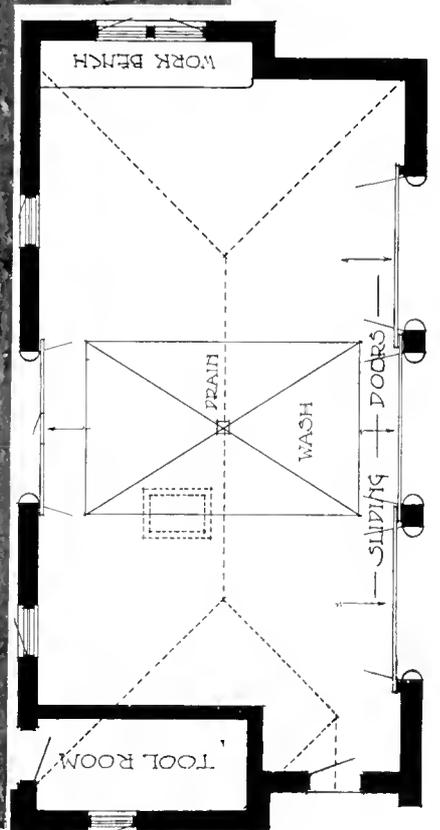

NO. 1001  
ALBANY, N.Y.



ONE-CAR GARAGE AT NEWPORT, R. I.  
Edward P. Whitman, Architect

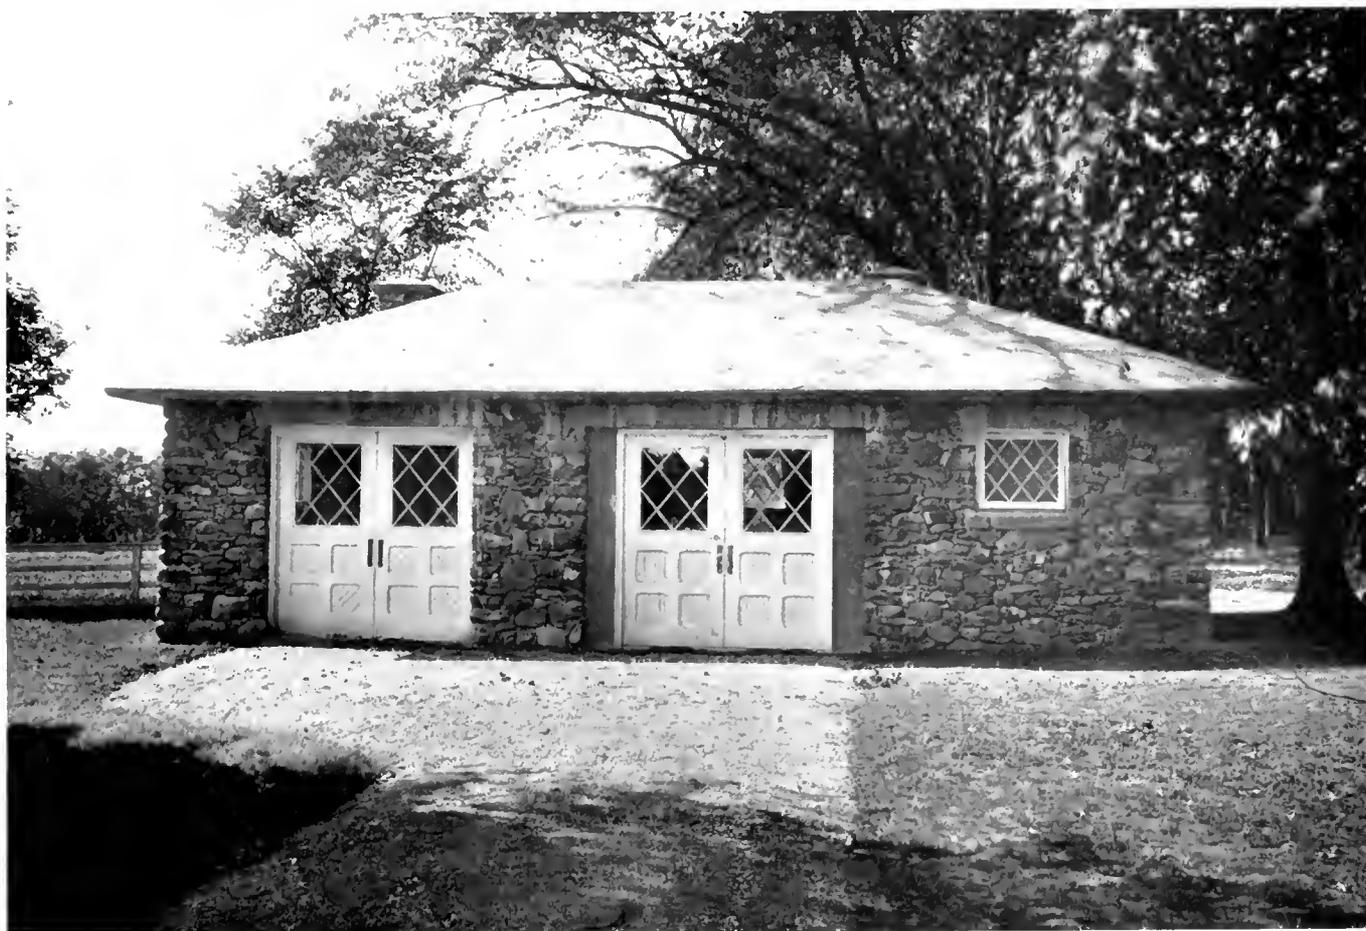


*Photo. copyright by Atlas Portland Cement Co.*



A GARAGE AT "GRASSLANDS," EAST VIEW, N. Y.  
Built of field stone with concrete roof

1941  
1942

GARAGES—COUNTRY AND SUBURBAN

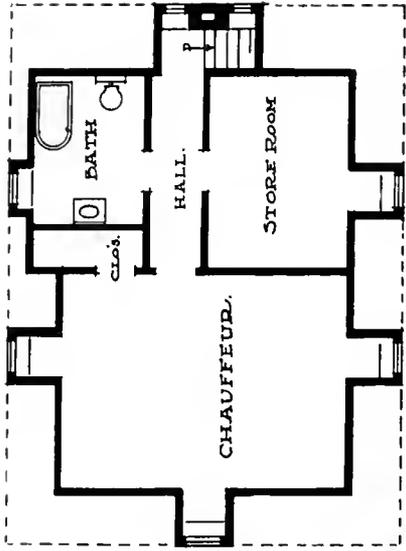


GARAGE AT ELKINS PARK, PA.  
C. E. Schermerhorn, Architect

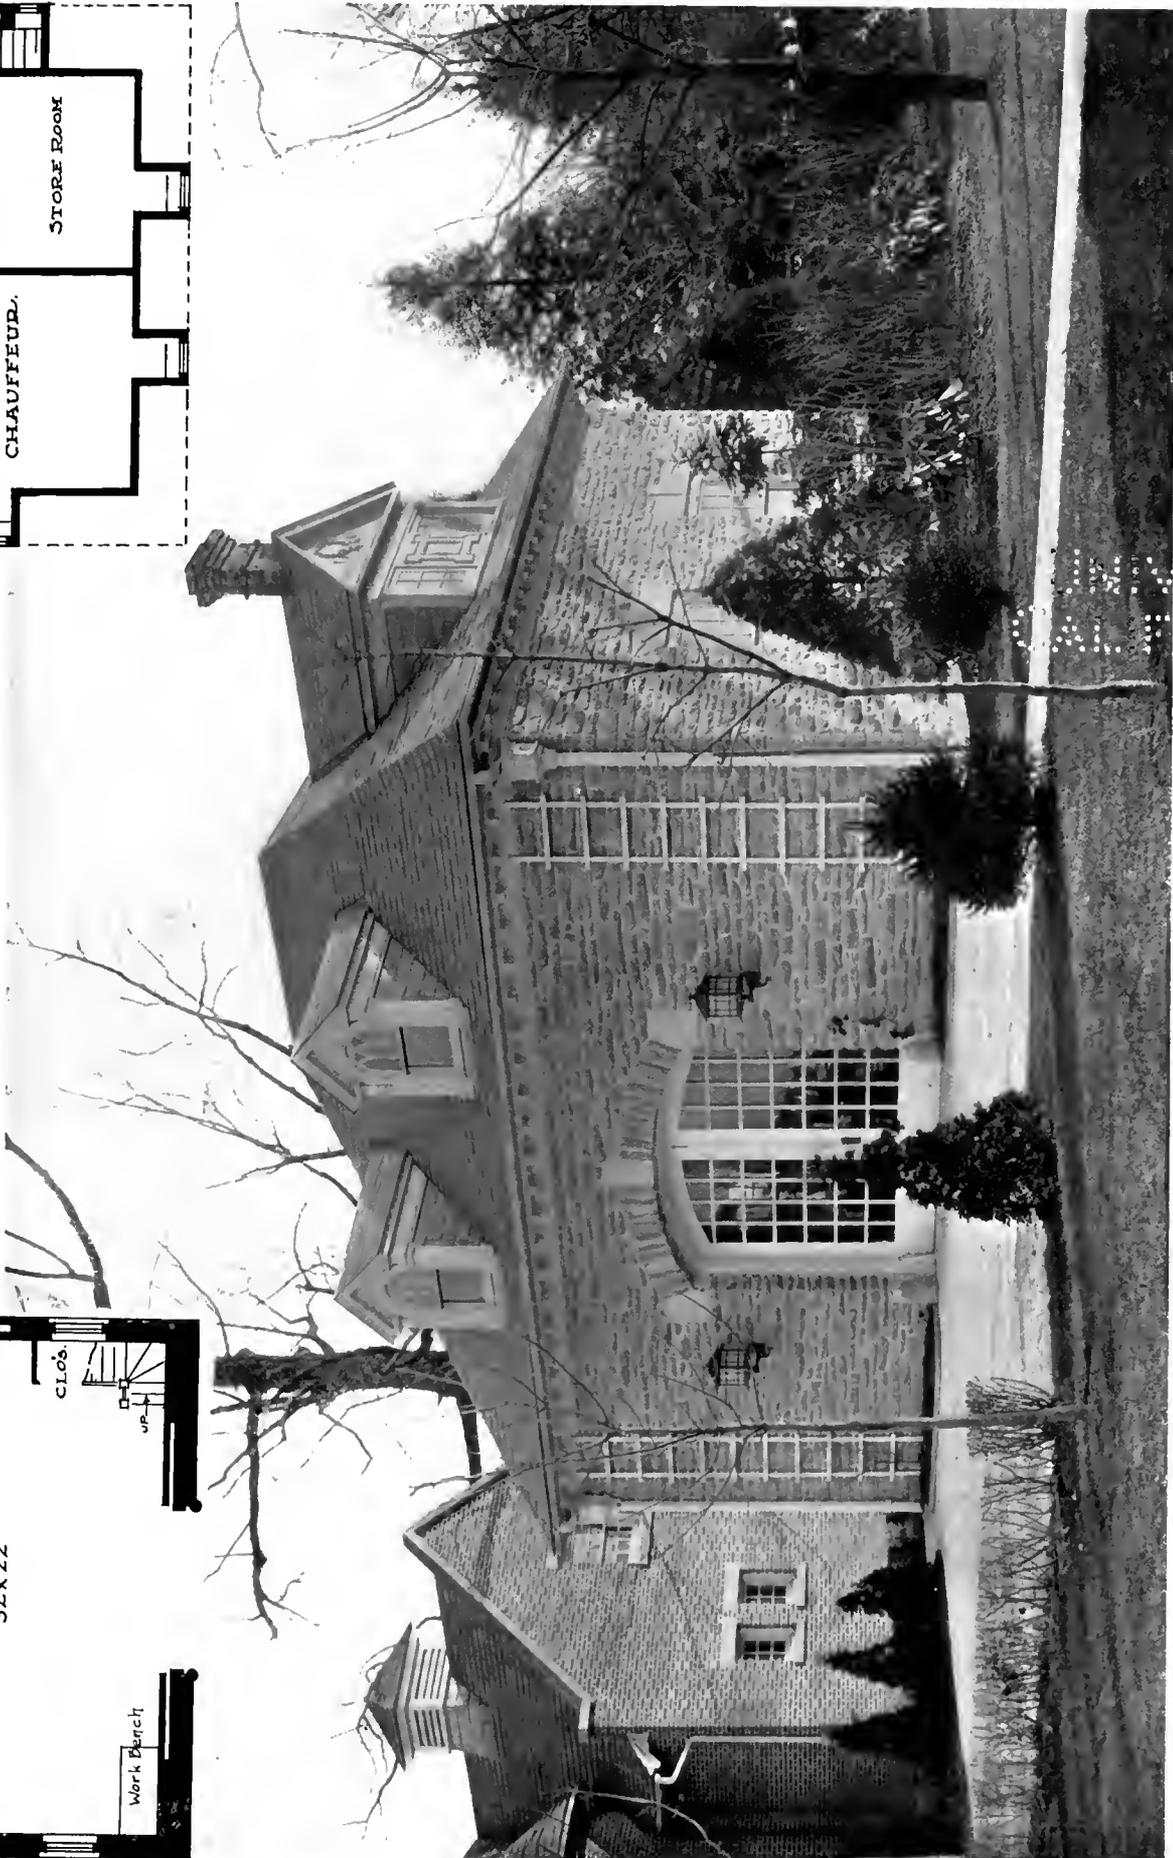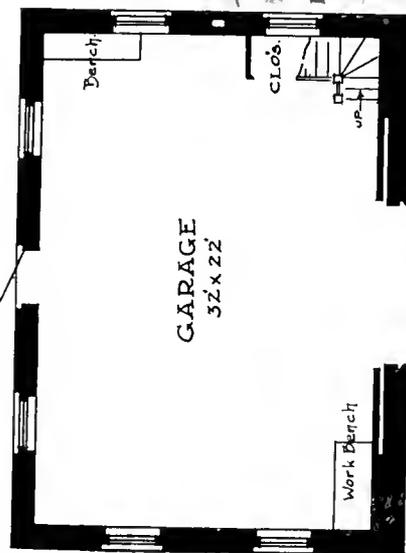





GARAGE FOR MR. JOHN TAYLOR  
MILBURN, N. J.  
Ernest Greene, Architect

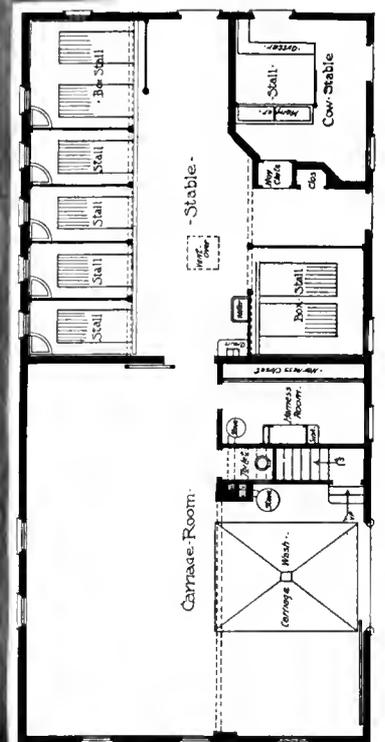

THE  
MUSEUM  
OF  
ART AND  
ARCHITECTURE  
OF  
THE  
CITY OF  
NEW YORK



GARAGE AT OVERBROOK, PA.  
Horace Wells Sellers, Architect




GARAGE IN BASEMENT OF HOUSE AT BROOKLINE, MASS.  
Charles A. Platt, Architect

to you  
America



70 1111  
ANBONLAC

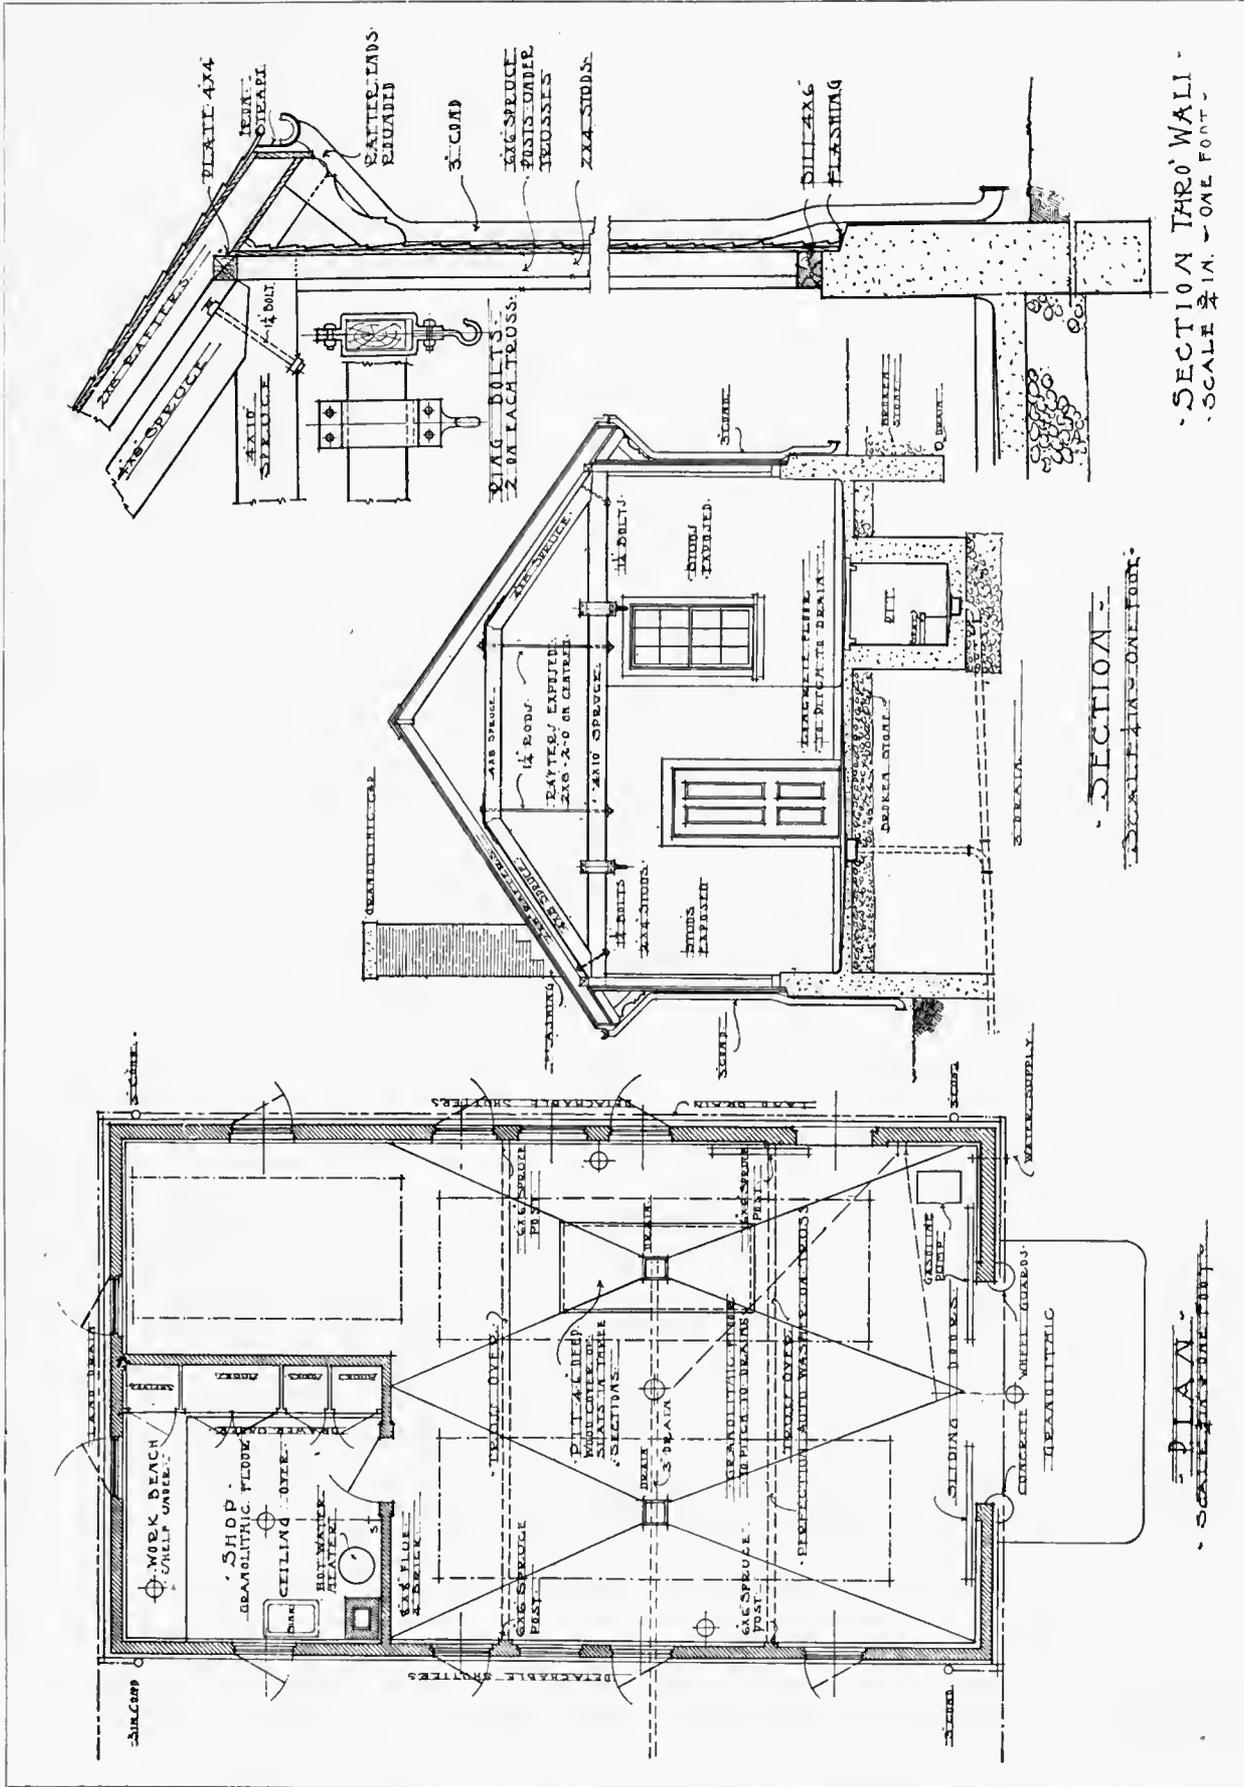


PLANS AND DETAILS OF A GARAGE AT BEVERLY FARMS, MASS.

Messrs. Kilham & Hopkins, Architects

Illustrating an economical and highly serviceable form of construction. The concrete walls are easy to keep clean and not readily injured

no vno  
anpou.ao

GARAGES—COUNTRY AND SUBURBAN

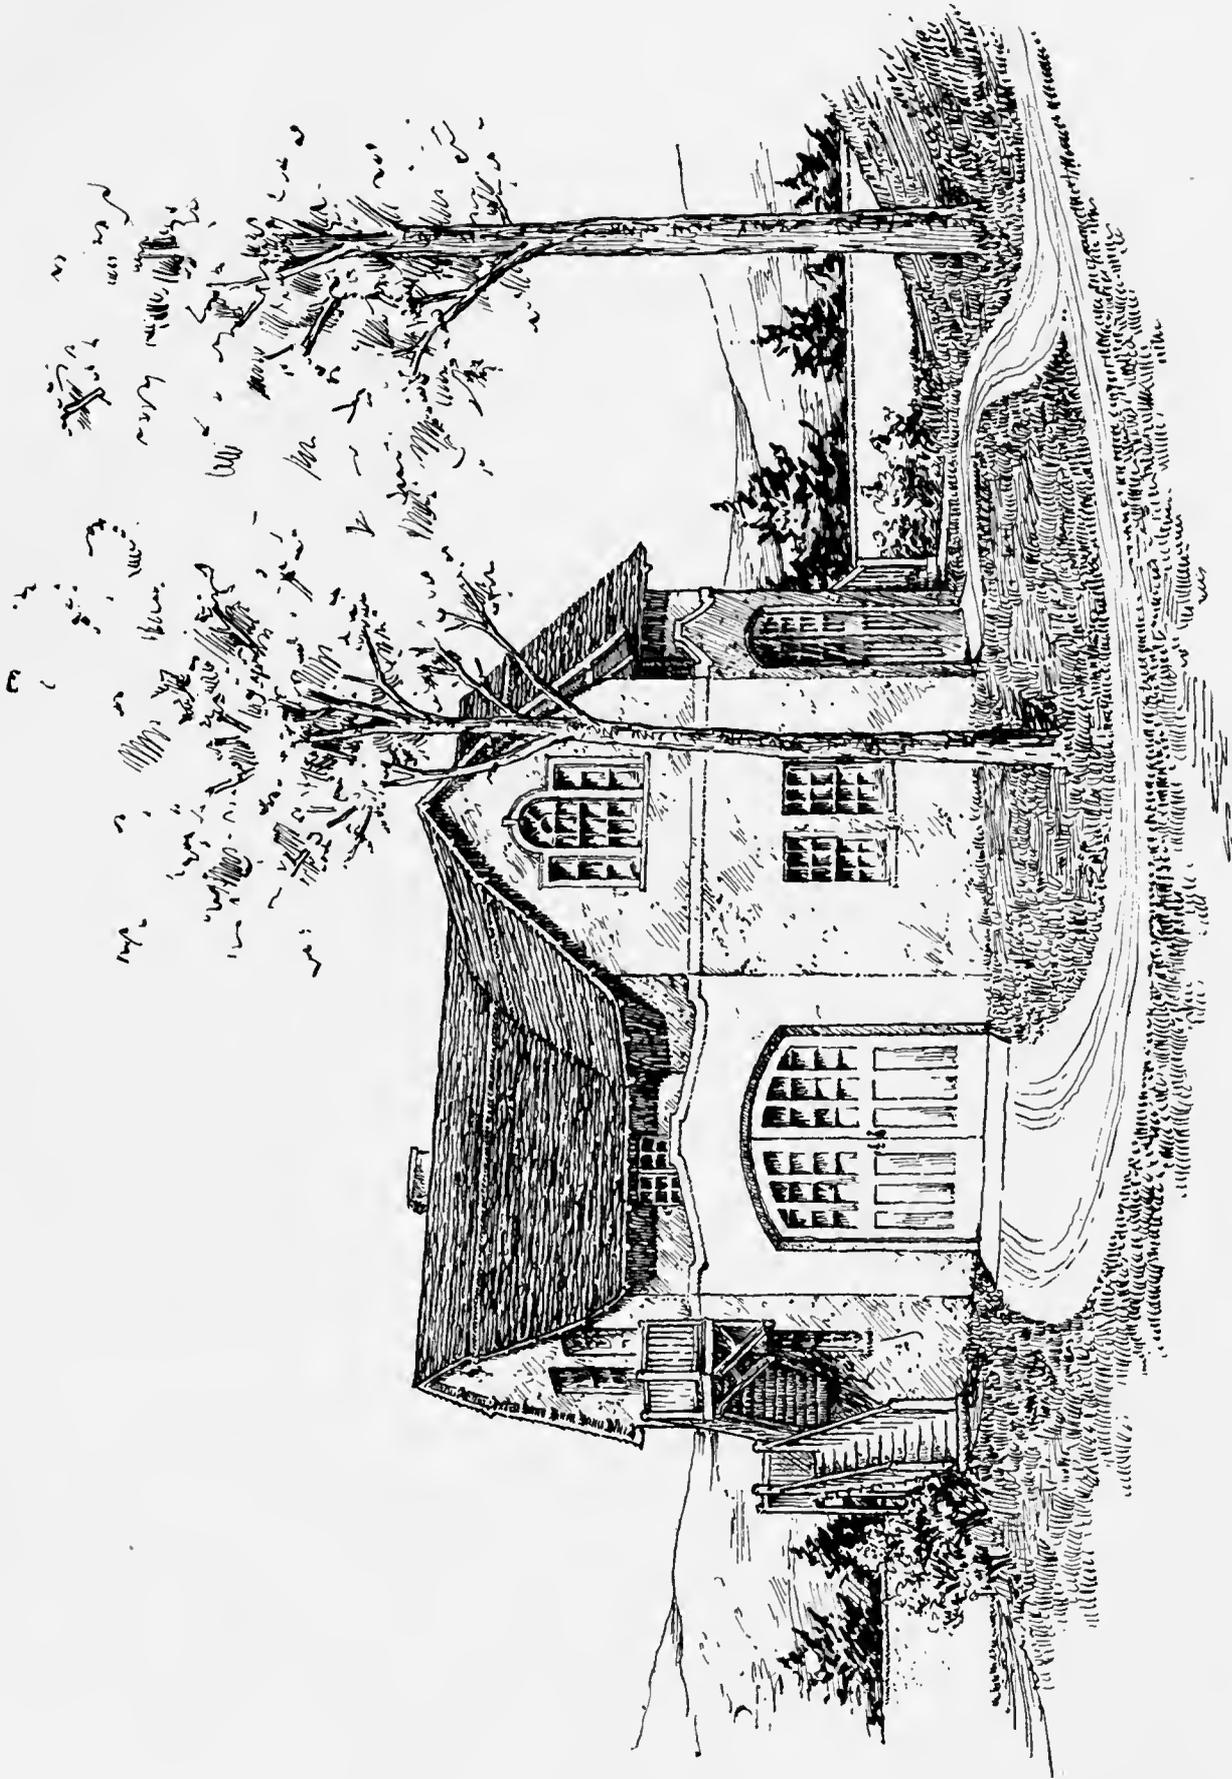

GARAGE AT LITHGOW, N. Y.  
Beatty & Stone, Architects

no vmi  
attached

GARAGES—COUNTRY AND SUBURBAN


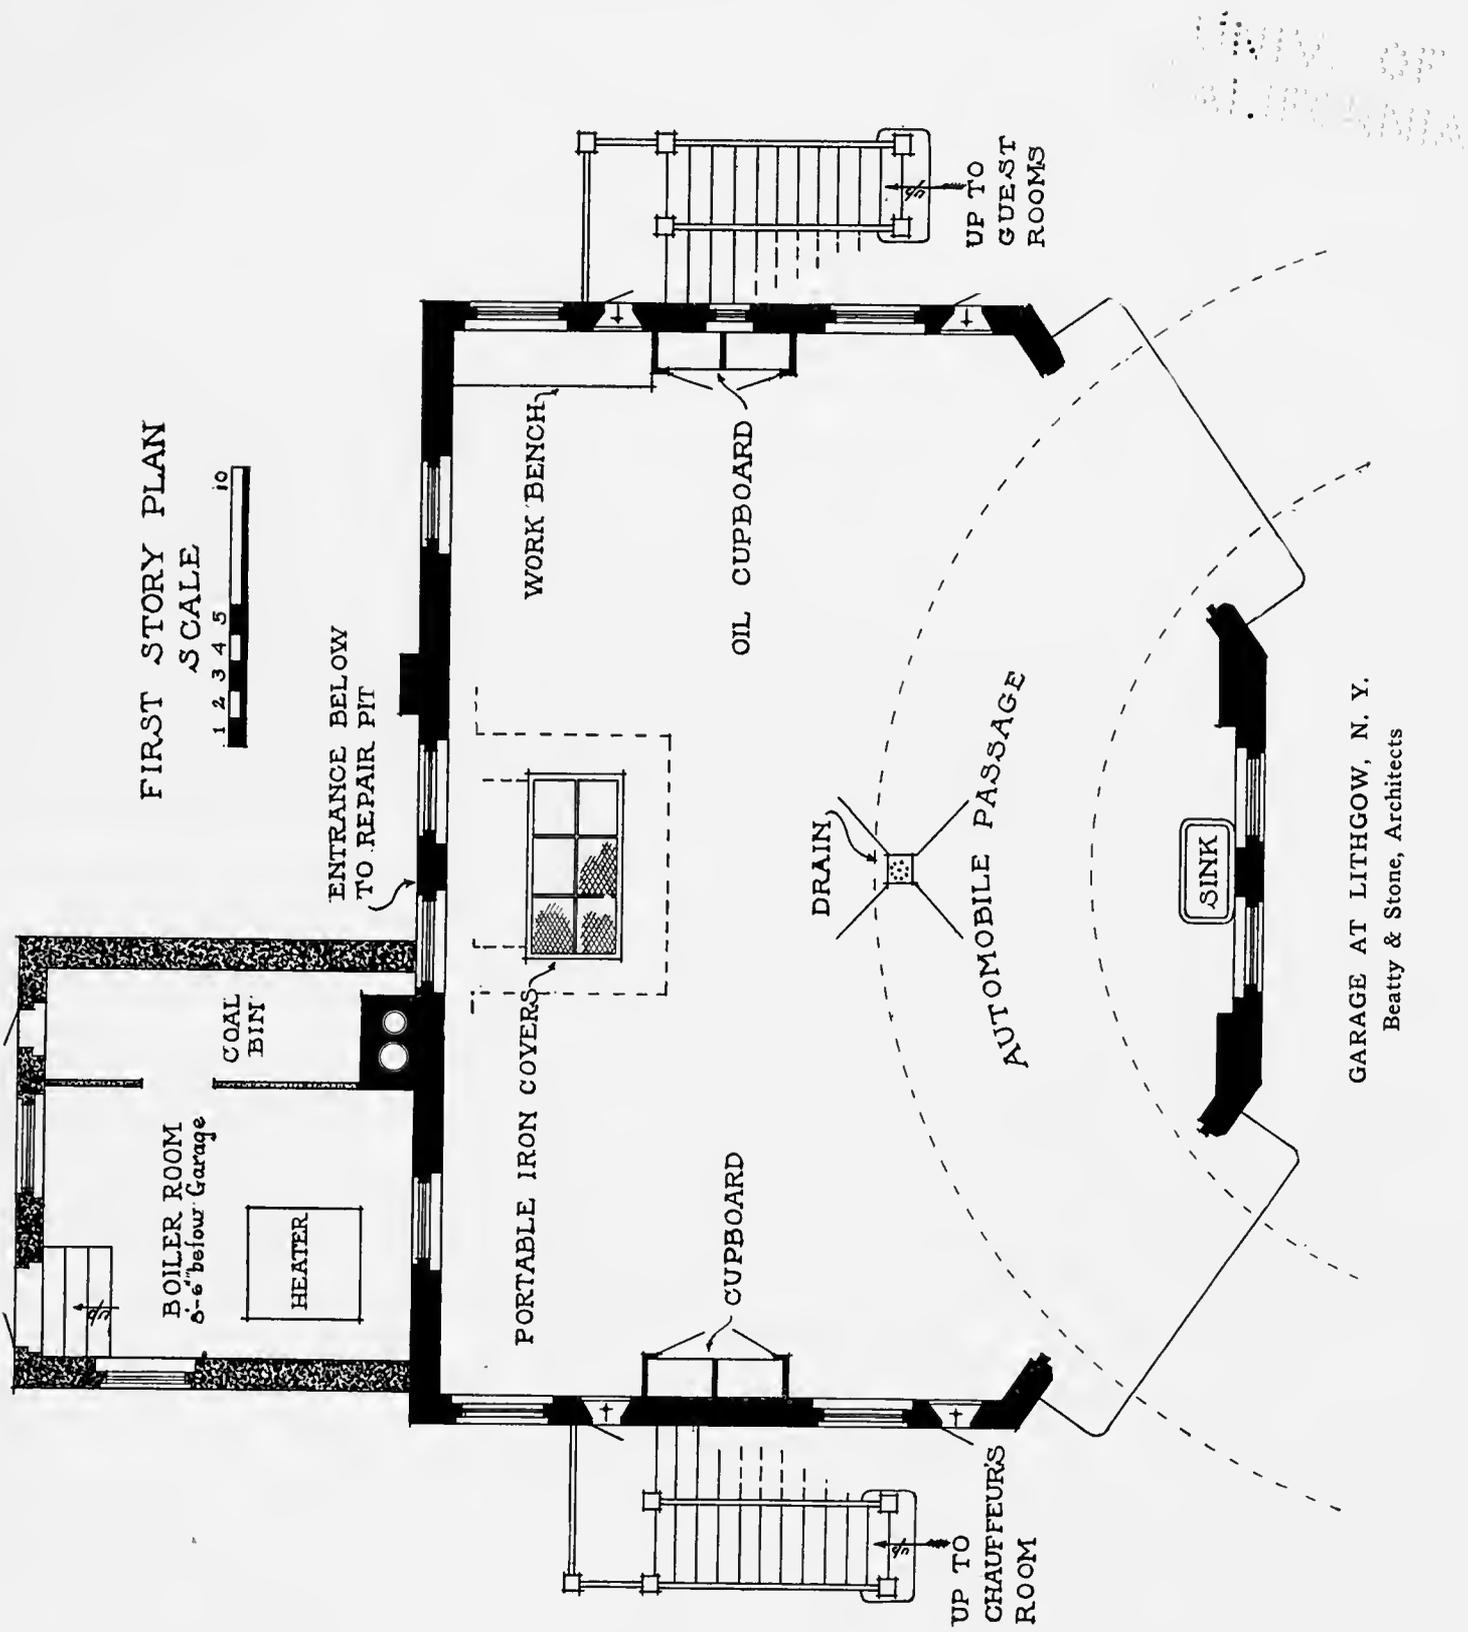


Plate 63

70 7000  
AUGUST 1960

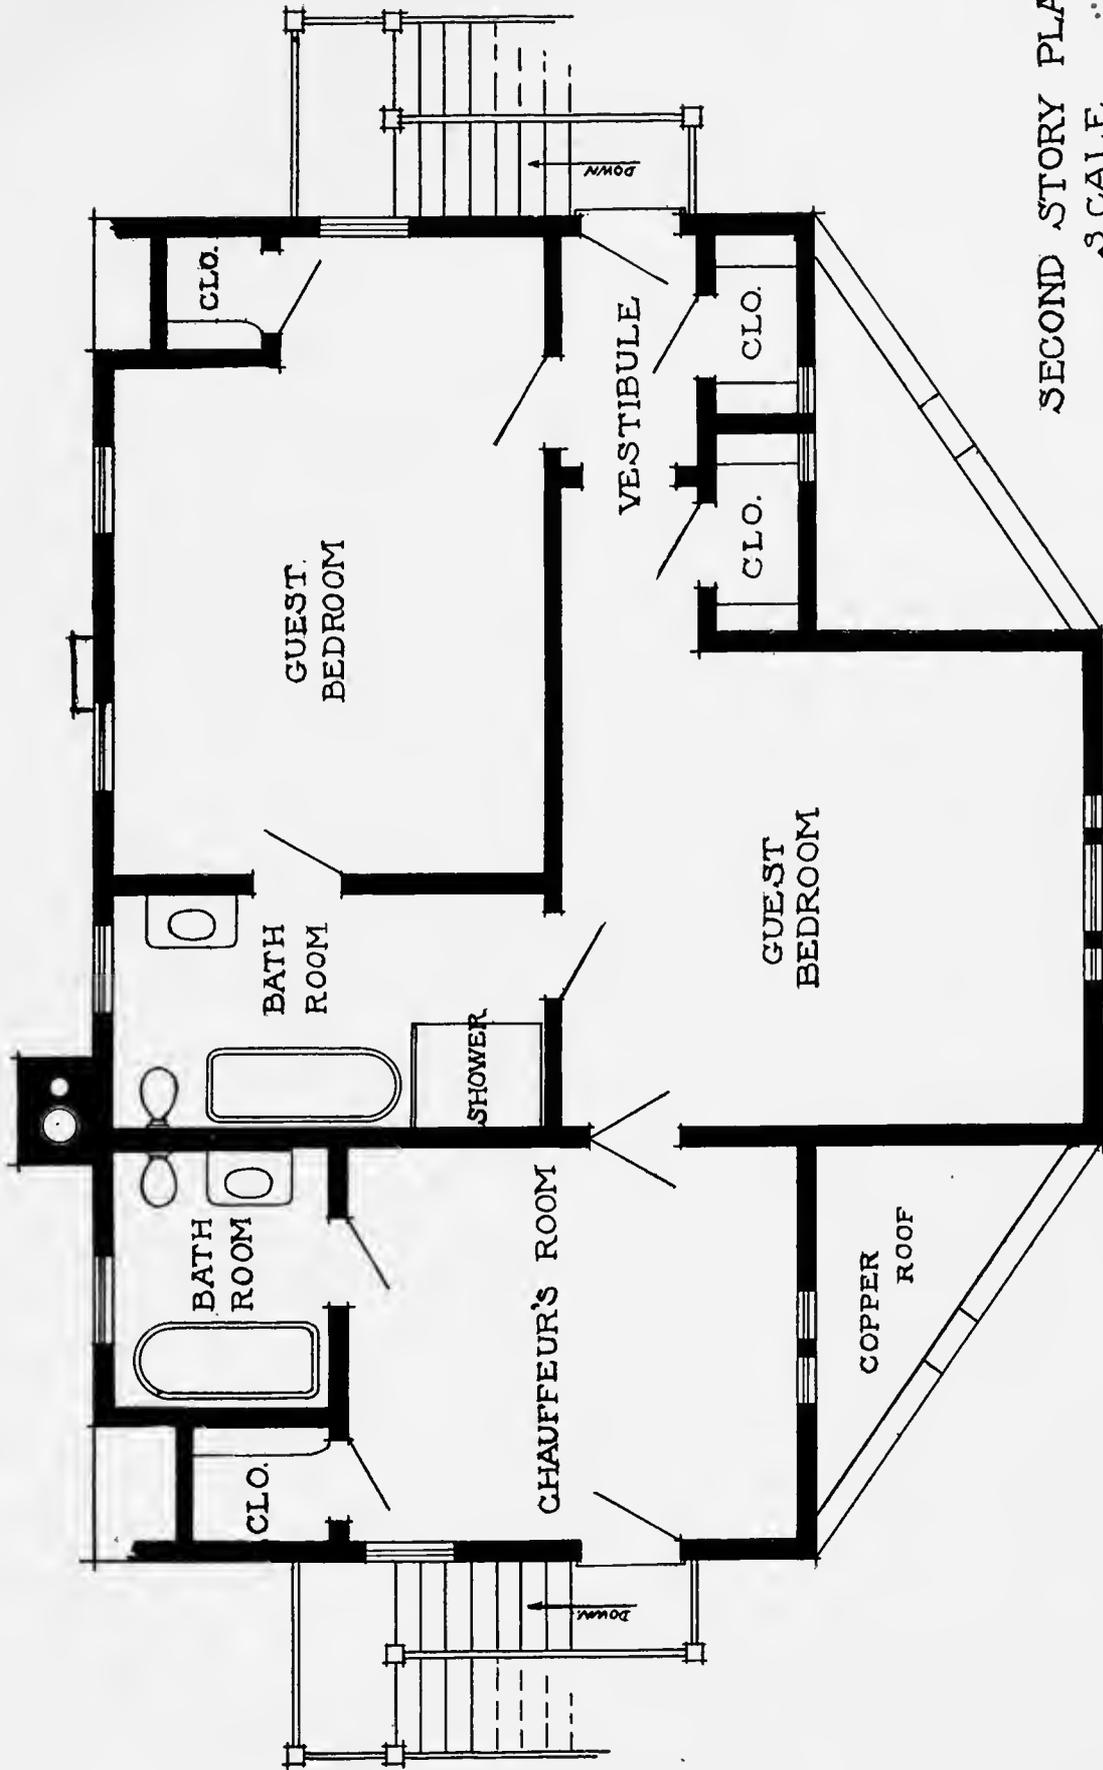

SECOND STORY PLAN

SCALE



GARAGE AT LITHGOW, N. Y.  
Beatty & Stone, Architects

no. 1111  
ANNOUNCED

# Make the Garage Fire - Proof

J-M Transite Asbestos Fire-proof Shingles, when applied to the roof and sides of a garage, offer the most perfect fire protection known, because they are made of Asbestos (rock) Fibre and Portland Cement—both minerals. Are absolutely proof against fire, water, acids, gases and chemical fumes, and are not in the least affected by the most severe weather conditions, except that the longer they are exposed the harder and tougher they become.



## J-M Transite Asbestos Fire-Proof Shingles

are moulded under hydraulic pressure into a homogeneous mass. They never rot, decay, warp or split like wood shingles. Are tough and resilient, but not brittle, so do not break and fall off like wood or slate. Weighing only about half as much as slate, they save considerable in freight, are much more easily handled and there is no danger of breakage. These Shingles are also excellent non-conductors of heat and cold.

J-M Transite Asbestos Shingles are easily put on with ordinary woodworking tools. Come in many different sizes and shapes to meet all conditions, and in colors of natural gray and Indian red.

ASK OUR NEAREST BRANCH FOR BOOKLET

### H. W. JOHNS-MANVILLE CO.

Manufacturers of Asbestos and Magnesia Products.

**ASBESTOS**

Asbestos Roofings, Packings Electrical Supplies, Etc.

Baltimore  
Boston  
Buffalo  
Chicago

Cleveland  
Dallas  
Detroit  
Kansas City

London  
Los Angeles  
Milwaukee  
Minneapolis

New Orleans  
New York  
Philadelphia  
Pittsburg

San Francisco  
Seattle  
St. Louis


1366

For Canada:—THE CANADIAN H. W. JOHNS-MANVILLE CO., LIMITED.  
Toronto, Ont. Montreal, Que. Winnipeg, Man. Vancouver, B. C.



# UNIVERSAL AUTO TURNTABLES

For Public and Private Garages, Police and Fire Stations, Etc., Etc.

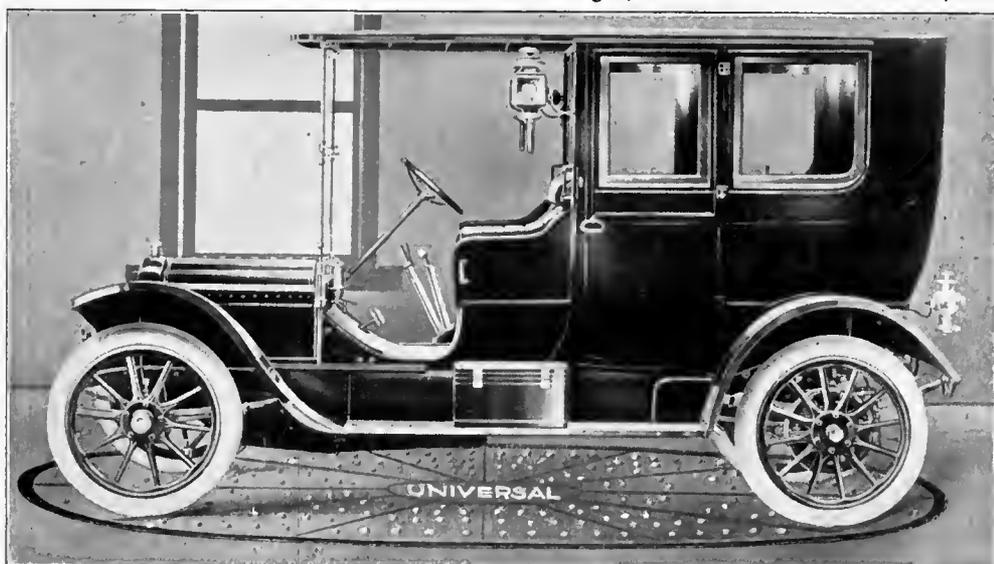

The general constructional features of the UNIVERSAL Auto-Turntable are known to every prominent architect. They'll tell you it is more strongly built and will carry a heavy load easier and with less friction than any other.

The UNIVERSAL runs 70% easier, turning with the slightest effort. Nothing to get out of order. Easily can be unpacked and set up from our printed directions.

Supplied for wood tops same as iron or cement, your carpenter bolting flooring through the holes provided in framework. Wood floors draw or warp in use as a wash-table, and are not recommended.

CAREFULLY OBSERVE THIS DETAILED TABLE IN SPECIFYING

WHEELBASE, Inches.....	108	132	144	156	180	204
TABLE DIAMETER, Feet.....	12	14	15	16	18	20
SHIPPING WEIGHT.....	4,700	5,000	5,150	5,300	5,600	6,000
SUPPORTING CAPACITY.....	4,500	6,000	6,000	6,000	6,000	6,000

Our Universal Auto-Jack is the Handiest Tool in the Garage.

Illustrated catalog and printed matter on request.

THE CANTON FOUNDRY & MACHINE COMPANY

616 East Eighth Street

CANTON, OHIO

# Otis Garage Elevators

---

**T**HERE has been a marked demand for up-to-date Garages, because of the phenomenal success of the motor car in both its pleasure and commercial aspects. In communities of high land values it is found desirable, and often necessary, that these buildings be of several stories, requiring the use of Power Elevators in order that the various floors may be fully utilized; but in the Country and Suburbs, where a two-story Garage is practicable, a Hand Power Elevator will prove of great service, and give increased value to the upper floor space.

We manufacture and install Elevators particularly adapted for Garage Service and will gladly mail literature on any and all Elevator requirements in which you are interested.

---

**OTIS ELEVATOR COMPANY**

**17 BATTERY PLACE, NEW YORK CITY**

Offices in all Principal Cities

## Victor Electric Tire Inflator

Indispensable in a private garage



The proper pressure is obtained quickly and easily. The air forced into the tires is free from oil and other impurities. The tire pressure can be ascertained in a moment; if you have inflated the tires while away from the garage, on your return, connect the inflator to your tires and the pressure is indicated—if too high, reduce the pressure by means of the relief valve on inflator; if too low simply turn the switch.

The outfit is complete as shown—no tank or accessories being required.

Price, arranged for 110v. direct current . . . \$75.00  
 Price, arranged for 220v. direct current . . . 78.00  
 Price, arranged for alternating current . . . 95.00

Send for descriptive circular

**Victor Electric Company**

55-61 Market St.,

Chicago

## THE AMERICAN ARCHITECT'S

BOOK DEPARTMENT

is prepared to furnish any architectural work now in print on short notice. Our Book advertising, appearing from time to time, will keep you posted. All inquiries promptly answered. . . .



THE  
**AMERICAN ARCHITECT**  
 231-241 West 39th Street  
 New York



## The Ideal Country or Suburban Garage

is one with every convenience.

Probably the most important question in securing an ideal garage is the proper storing of oils and gasoline.

*The above is an illustrated Bowser suggestion from our booklet, "Private Garage Arrangement and Equipment," which is valuable alike to the architect and the garage owner.*

Ask our salesman in your city to consult with you in making your garage complete and satisfactory.

We have bulletins giving sizes, styles and detailed information to assist the architect in specifying these systems in his garage plans.

The Bowser systems are adapted to all conditions and will fit the price and requirements of the man with one small car as well as the man with several cars and a large garage. They procure the measure of safety prescribed by the National Board of Underwriters and conform to the local fire restrictions.

*Its installation means absolute safety, economy, convenience and pure fuel for your engine.*

**No Trouble—**


**No Delays—**

**Just Pleasure—**

Information that should be in every autoist's pocket. Ask for Free Booklet No. 72.

**S. F. Bowser & Co., Inc.**  
 FT. WAYNE, IND.

Boston, 141 Milk St. Chicago, Fisher Building  
 New York, 50 Church St. San Francisco, 612 Howard St.  
 Philadelphia, 1313 Arch St. Toronto, 66-68 Frazer Ave.

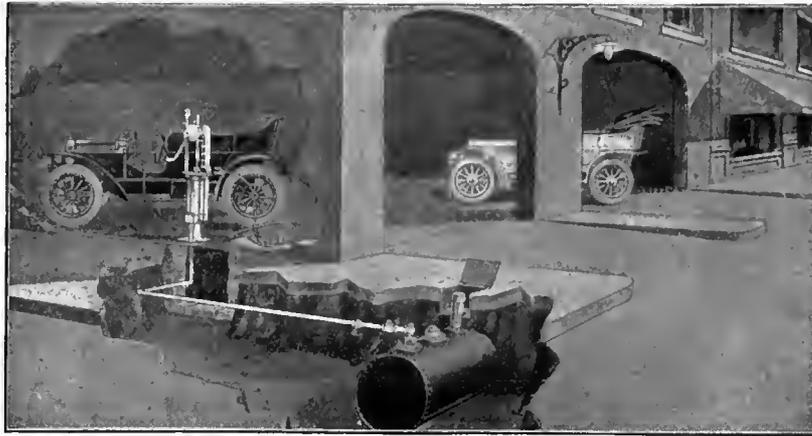

**Mr. Architect:**

Before specifying gasoline and oil storage equipment write us for our Bulletin "F" which illustrates and describes the AMERICAN SYSTEM which is the most modern and efficient oil storage system ever offered. We build both measuring and non-measuring pumps and tanks of any capacity desired.

**The American Oil Pump & Tank Co.**  
Dayton, Ohio  
Branch Offices Principal Cities


**Welded-Seamless  
Steel Tanks Insure  
Gasoline Storage Safety**

Underground Storage of gasoline in our Welded-Seamless Tanks is the only safe and economical method of storage. Evaporation of gasoline is impossible. In no other tank is safety assured.


The tanks furnished with our storage outfits are of **welded-seamless** steel, galvanized and painted outside with two coats of anti-corrosion paint. They **cannot leak** and will last for years. Our self-draining and measuring pumps are of excellent design and reliable under all conditions of service.

We are prepared to furnish outfits of any size for public or private garages.

**Janney, Steinmetz & Co.**  
PHILADELPHIA NEW YORK



**T H R E E  
S I X  
T E E N  
I N C H  
S T E E L**

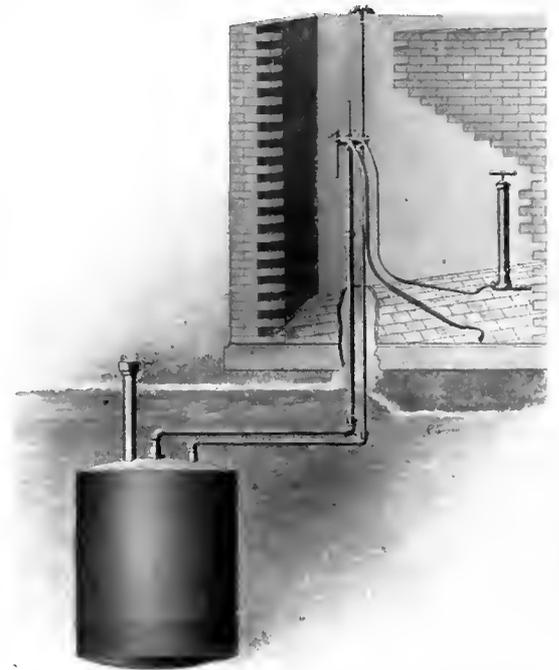

For the storage of Gasoline for Private and Public Garages "AIR-TIGHT" Gasoline Storage Outfits are the best, simplest and most easily operated. The tank is constructed of 3/16" Open-Hearth Basic Steel with all joints brazed, it is tested under air pressure and we guarantee it to be absolutely tight. The System throughout is evaporation proof, is automatically vented and at no time, except when in operation, is any gasoline retained in the pipes inside of the building. "AIR-TIGHT" Gasoline Storage Systems have been examined and tested by Underwriters' Laboratories and listed by the Consulting Engineers of the National Board of Fire Underwriters. Write us for prices and other information.

**AIR-TIGHT STEEL TANK COMPANY**  
OLIVER BUILDING, PITTSBURGH, PA.



Switchboard Built By Us To Charge 78 Vehicles At One Time

**WE** will design and build for you a Charging Board similar to this one or if you require a smaller board we manufacture them suitable for one or more vehicles.

**There are no better boards made.**

WRITE FOR PRICES.

**Metropolitan Electric Mfg. Co.**  
14th St. and East Ave., Long Island City,  
NEW YORK, N. Y.



UNIVERSITY OF CALIFORNIA LIBRARY  
BERKELEY

Return to desk from which borrowed.  
This book is DUE on the last date stamped below.

FEB 20 1948		
	FEB -4 1971	84
REC'D LD	JAN 28 71-11AM 11	
	Received in Interlibrary Loan	
JUN 10 1977	51	
	OCT 1 1983	
MAY 16 78		
JUL 9 1977		
REC. CIR. JUN 9 '77		
SANTA BARBARA INTERLIBRARY LOAN		
SEP 6 1983		
REC. CIR. OCT 17 '83		
LD 21-100m-9,'47(A5702s16)476		

ajle  
dso m

NA8348

A6

**250478**

American

... ..  
... ..

